


TMS 55-12 TAP

Art. Number 300313

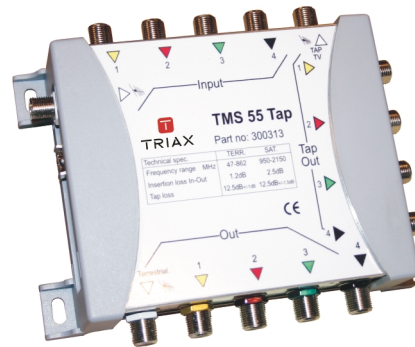

The TMS 55-TAP allows you to create a 4 polarity Trunk distribution setup, using TMS 5x multi switches on each. Provides 12dB TAP out loss.

Technical Specifications

ORDER INFORMATION

EAN Number 5702663003132

FREQUENCY RANGE

Frequency range TER | MHz 47...862 MHz

Frequency range SAT | MHz 950-2150 MHz

LOSS

Through loss TER | dB 1.5 ±1.5 dB

Through loss SAT | dB 1.2 ±1.0 dB

Tap loss SAT | dB 12.5 dB

Tap loss TER | dB 12.5 dB

Insertion loss - SAT | dB 2.5 ±1.5 dB

Insertion loss - TER | dB 1.2 ±1 dB

ISOLATION

Isolation trunkline | dB > 30.0 dB

ELECTRICAL

Impedance | Ω 75 Ω

OPERATIONAL

Temperature - operating | °C 0...55 °C

CONNECTORS

Number of trunk inputs 4 SAT, 1 TER

Number of trunk outputs 4 SAT, 1 TER



Technical Specifications

Colorcoding @IF/TER inputs

VL=Black, VH=Red, HL=Green, HH=Yellow, Clear=TER

MECHANICAL

Packaging Height m	0.400 m
Packaging Width m	1.000 m
Packaging Depth m	1.450 m
Packaging Volume m3	0.580 m3
Net Weight kg	0.430 kg
Tara Weight kg	0.250 kg
Total Weight kg	0.680 kg