


TMS 55-15 TAP

Art. Number 300333

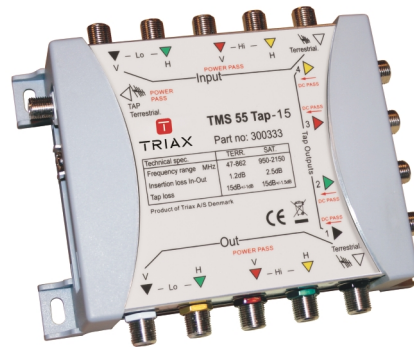

The TMS 55-TAP allows you to create a 4 polarity Trunk distribution setup, using TMS 5x multi switches on each. Provides 15dB TAP out loss.

Technical Specifications

ORDER INFORMATION

EAN Number 5702663003330

FREQUENCY RANGE

Frequency range TER | MHz 47...862 MHz

Frequency range SAT | MHz 950-2150 MHz

LOSS

Through loss TER | dB 1.5 ±1.5 dB

Through loss SAT | dB 1.2 ±1.0 dB

Tap loss SAT | dB 15.0 dB

Tap loss TER | dB 15.0 dB

Insertion loss - SAT | dB 1.2 ±1 dB

Insertion loss - TER | dB 1.5 ±1 dB

ISOLATION

Isolation trunkline | dB > 30.0 dB

ELECTRICAL

Impedance | Ω 75 Ω

OPERATIONAL

Temperature - operating | °C 0...55 °C

CONNECTORS

Number of trunk inputs 4 SAT, 1 TER

Number of trunk outputs 4 SAT, 1 TER



Technical Specifications

Colorcoding @IF/TER inputs

VL=Black, VH=Red, HL=Green, HH=Yellow, Clear=TER

MECHANICAL

Packaging Height m	0.080 m
Packaging Width m	0.140 m
Packaging Depth m	0.210 m
Net Weight kg	0.430 kg
Tara Weight kg	0.250 kg
Total Weight kg	0.680 kg