

Developers & Importers of Digital Technology























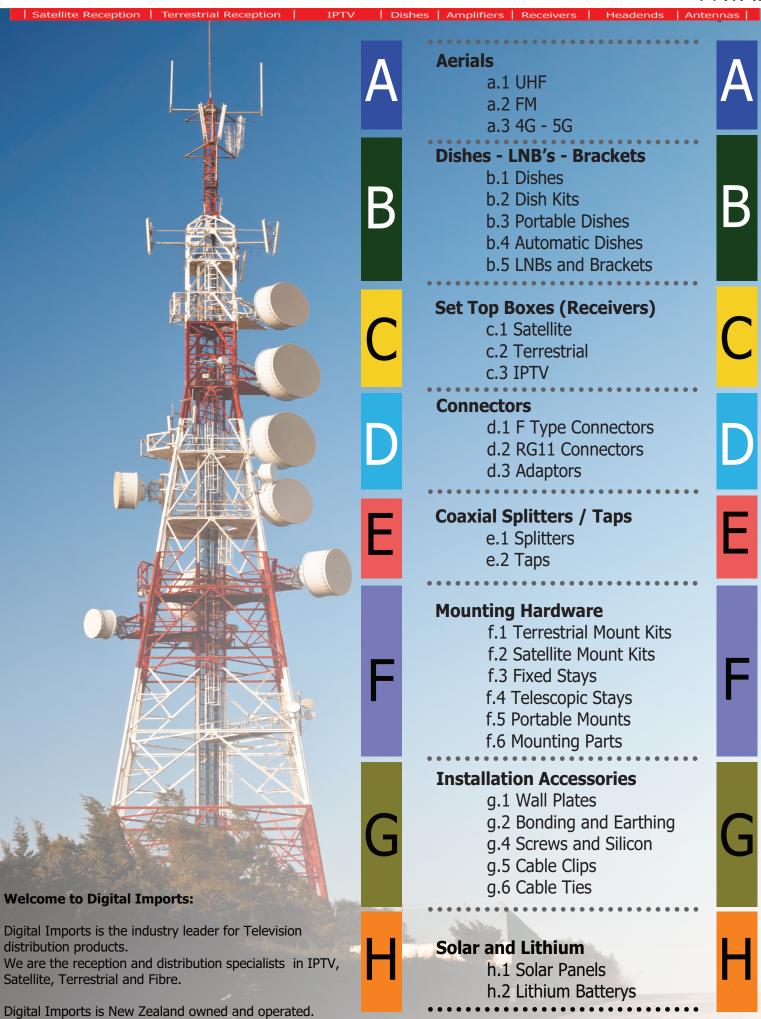






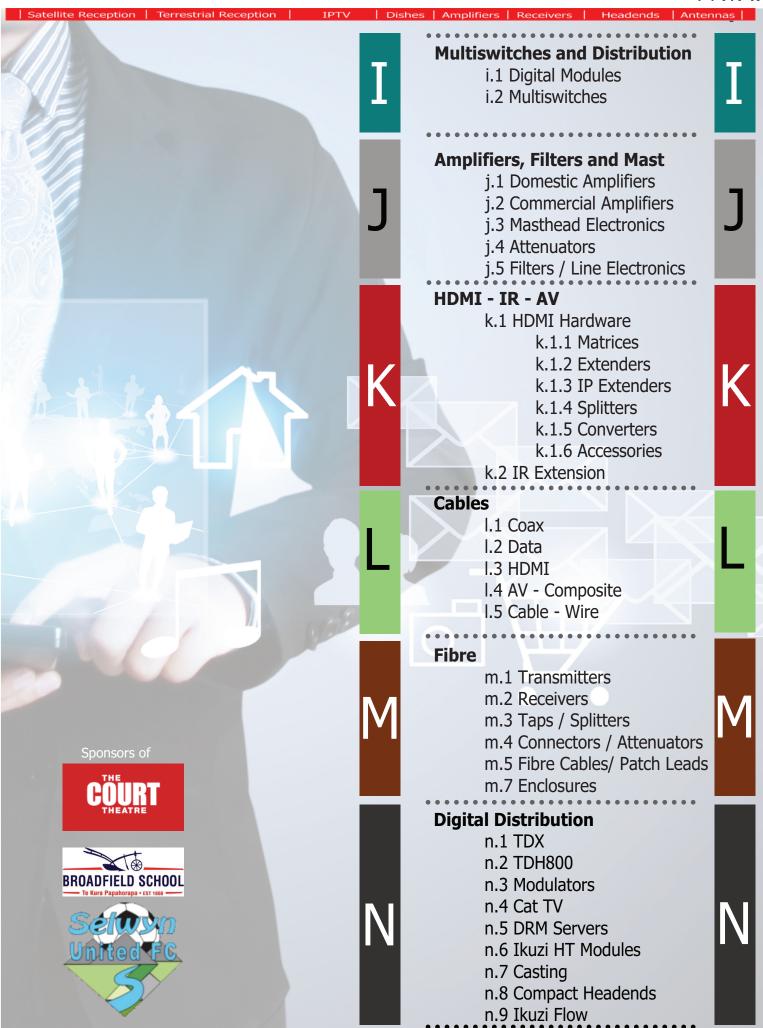





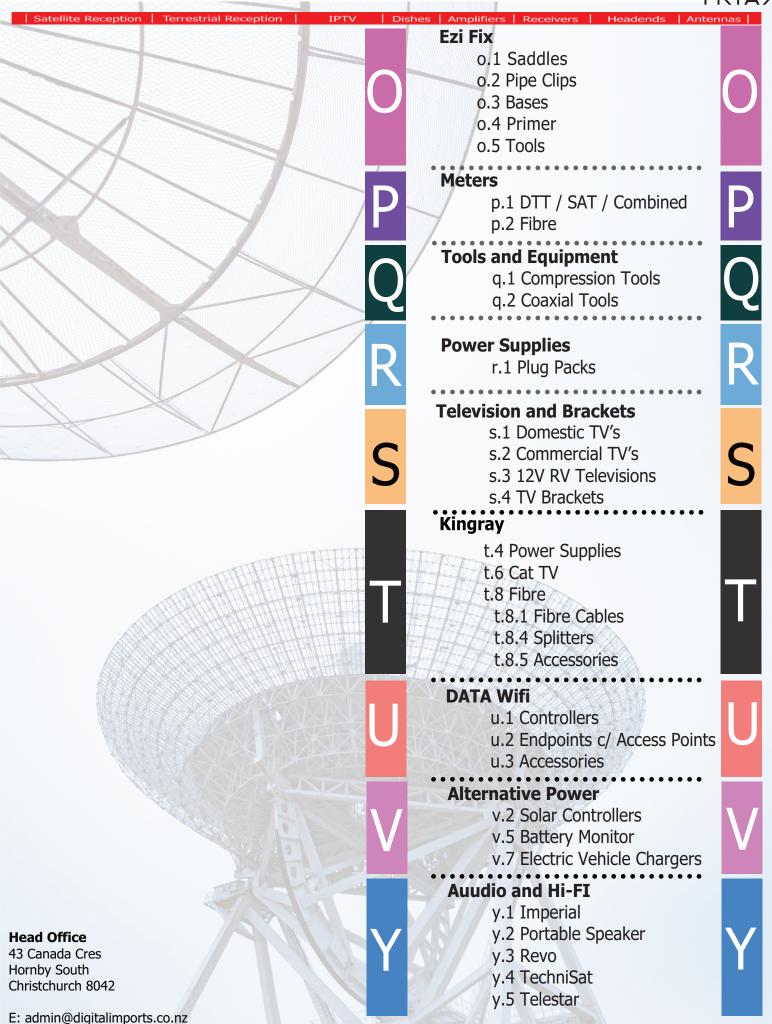



A. Aerials



atellite Reception | Terrestrial Reception

| Amplifiers | Receive

A. Aerials

AERIALS

Aerials Category Index

We offer a large range of Aerials designed and manufactured to exacting standards. Look for aerials that are certified for LTE (4g/5g) protection when selecting for Freeview DTT

A. Aerials a.1 UHF a.2 FM a.3 4G - 5G

Remarks: Page 1 of 5

a.1 UHF



DIGI 6, LTE 700, Ch 21-48 - Replaces 108380

Designed for Digital reception Ch 21-48 LTE protected Gain 474 MHz (Ch21) 7.8 dBi 602 MHz (Ch 37) 8.7 dBi 694 MHz (Ch 48) 10.0 dBi Front to back 14dB Rejection @758 MHz (CH 56) 7.8dB

Remarks: LTE Rejection

105460





Interference protection from LTE 700 & 800 signals Mechanical filtering for higher gain

Corrosion and weather proof dipole housing Designed to receive DTT signals in the 470...694 MHz range

Gain max 13 dBi 9.5 dBi Gain @ 474 MHz (Ch. 21) Gain @ 694 MHz (Ch. 48) 12.1 dBi Gain @ 602 MHz (Ch. 37) 9.2 dBi

Remarks: LTE Rejection

105470

Digi 14, LTE 700, Ch 21-48 Boxed High Gain Yagi



Designed for Digital reception - Great for low signal areas Ch 21 - 48 LTE protected - By Design. Gain 474 MHz (Ch21) 10.9dB 602 MHz (Ch 29) 11.1dB 694 MHz (Ch 45) 13.5 dB Rejection @ 758 Mhz Ch 56 -3.3dB

Rejection @ 788 Mhz Ch 60 - 8.3dB Front to back 23dB

Size: 1085mm Remarks: LTE Rejection

105550

Unix 32, LTE 700, ch 21-48



Quick and easy installation with semi-assembled aerials

Mechanical filtering for higher gain

Reliable high-quality aerials secures end-consumer satisfaction

Corrosion and weather proof dipole housing

Designed to receive DTT signals in the 470...694 MHz range

Gain 12.5 max dBi

Gain @ 474 MHz (Ch. 21) 12.4 dBi Gain @ 694 MHz (Ch. 48) 11.2 dBi Gain @ 602 MHz (Ch. 37) 11.8 dBi

Size: 777mm x 580mm

Brand: Triax

Brand: Triax

Brand: Triax

Bulk Qty Available: 📝

QTY'S 10+,30+,50+

Bulk Qty Available: 🔰 QTY'S 10+,30+,50+

Brand: Triax





a.1 UHF Terrestrial Reception Dishes | Amplifiers | Receiver Unix 52, LTE 700, ch 21-48 TRIAX UHF LTE 700 Aerials **Brand:** Triax



Interference protection from LTE 700 signals Quick and easy installation with semi-assembled aerials

Disruption free installation from rooftop to outlet.

Mechanical filtering for higher gain

Reliable high-quality aerials secures end-consumer satisfaction

Corrosion and weather proof dipole housing

Designed to receive DTT signals in the 470...694 MHz range

Access to reliable, expert support from TRIAX

Remarks: 14.5 dBi Gain **Size:** 580 x 1394mm 105570 Unix 100 el, ch 21-48 (Colour Box)

> TRIAX UHF LTE 700 Aerials **Brand:** Triax

Disruption free installation from rooftop to outlet.

Interference protection from LTE 700 & 800 signals Quick and easy installation with semi-assembled aerials

Mechanical filtering for higher gain

Reliable high-quality aerials secures end-consumer satisfaction

Corrosion and weather proof dipole housing

Designed to receive DTT signals in the 470...694 MHz range

Access to reliable, expert support from TRIAX

Gain 17 max dBi

Gain @ 474 MHz (Ch. 21) 13.3 dBi Gain @ 602 MHz (Ch. 37) 16.2 dBi Gain @ 694 MHz (Ch. 48) 13.9 dBi

Size: 580 x 2343mm Remarks: 17 dBi Gain

108007

Dual Panel Phased array UHF Aerial LTE700

TRIAX Digi Grid aerials - UHF flat panel TV antenna.

With high gain and an excellent front to back ratio this aerial ensures perfect TV

The reflector grid is galvanised ensuring long service life.

The aerial has a very even gain curve and is suitable for stacking.

21...50 LTE 4G & 5G Channels

Gain 9...13 dBi

Front to back ratio - horizontal 20 dB

All elements are screwed for resonance protection.

Suitable for Vertical or Horizontal Mounting

Size: 545mm x 805mm Remarks: Wind load @42 m/s = 78N

108008

Mini Grid antenna LTE 700

Mini Grid antenna LTE 700

Gain 3...9 dBi Small & efficient

High gain compared to size

All elements screwed in place for high wind loading and resonance protection

Suitable for Vertical or Horizontal Mounting

Size: 410x430mm Remarks: Channel 21...48

108194

TX20L LTE 700 Log Periodic

Suitable for poor reception conditions, with reflections (shadows) but where signal

Rear mounted F-connector. Flat wideband response.

Good impulse noise rejection for stable digital reception. Rugged construction.

Gain 4...9 dBi

Gain @ 474 MHz (Ch. 21) 5 Typ dBi Gain @ 602 MHz (Ch. 37) 8.0 typ dBi

LTE Rejection

Remarks: LTE Rejection





Brand: Triax

Bulk Qty Available: 📝 QTY'S 10+



Bulk Qty Available: 🗹

QTY'S 10+

Brand: Triax

Brand: Triax







UPC 5702661001888

Brand: Triax

a.1 UHF tellite Reception | Terrestrial Reception | | Dishes | Amplifiers | Receivers | 108381B Triax 10 Element Yagi CH 21-50 LTE700 Plastic Bag/BOX 20 Supplied in complete box of 20 Aerials, **Brand:** Triax Aerials in plastic bags. Bulk Qty Available: 🗹 Strong, rugged construction 10 Element, Group T, UHF Antenna, 470-690 MHz 13dBi Gain (max) Excellent F/B ratio >15dB Designed to mitigate 4G/LTE 700 interference Pre-assembled, quick install reflector Gain 7...13 dBi Gain @ 474 MHz (Ch. 21) 8 Typ dBi Gain @ 602 MHz (Ch. 37) 10.5 Typ Remarks: Bulk 20 Pack includes freight 109170 **UFO 170 Digital LTE 700 Aerial** Triax UFO digital aerial (UHF/FM). LTE Protection for 4G/5G **Brand:** Triax A small and discreet antenna. The antenna is surface-treated to withstand impacts from saltwater and weather The ideal flexible solution for home, caravan, boat, mobile home, bus and truck. TETRA safe. Gain - UHF 27.0 dB 28.0 dB Gain - VHF/FM 3.0 dB Noise figure **Size:** 255mm x 65mm x Remarks: Requires PSU for 5-24VDC UPC 5702661091704 **UFO Centre Bracket Mount** Centre Mount Bracket for Triax UFO Aerials UPC 5702661332258 **UFO Bracket Kit** Complete replacement bracket kit for Triax UFO aerials **Brand:** Triax UPC 5702661332265 a.2 FM **Triax FM Omnidirectional Aerial** Gain 2.0 dB **Brand:** Triax 1 Element

Triax FM Aerial 3 Element

Small and convenient FM antenna 75 Ohm.

Suitable for reception at Band 2

Quick install clip on dipole

Impedance matched balun

Weather proof with F connector

Gain 6.0 dB

Front to back ratio 16 dB

Weight 1.3kg







Terrestrial Reception Dishes | Amplifiers | **Digiflexi TT5 DVB Aerial with booster** The compact, indoor antenna DIGIFLEX TT5 receives digital TV programs, that can Brand: TechniSat be received via DVB-T2, in many places, even without an external antenna. In addition, the antenna is ideal for receiving DAB + radio in the best digital quality. The active amplifier antenna is easy to install and only needs to be connected to the antenna socket of your DVB-T2 receiver, TechniSat digital television or DAB + receiver. An additional built-in LTE filter also filters out interference from cell phone signals. The integrated signal amplifier with 26 dB power is supplied directly from the connected receiver with the required supply voltage of 5 volts (40 mA). The DIGIFLEX TT5 thus guarantees strong and stable reception. When using with DAB + receivers, note that the antenna connection of the DAB + receiver must provide the 5 V supply voltage for the antenna! Otherwise it won't work. The DIGIFLEX TT5 has a magnet built into the base Remarks: 5V Supply required **Digiflex TT6 DVB Aerial** The compact DIGIFLEX TT6 indoor antenna receives digital television via DVB-T2. **Brand:** TechniSat TV programs that can be received in many places, even without an external antenna. In addition, the antenna is ideal for receiving FM radio in the best quality. The passive rod antenna is easy to install and only needs to be connected to the

a.3 4G/5G

antenna socket of your DVB-T2 receiver, digital television or DAB + receiver.

109601 D5A 11W Directional 5G Antenna 11dB gain White, outdoor use 5G antennas for holiday homes or motor homes: **Brand:** Triax Wherever you are, it's ever more necessary to stay connected at the highest possible speed. In remote areas or in holiday homes, more and more people need to work in a fully functioning home office, or simply keep their teenagers occupied with online streaming. TRIAX 5G antennas boost mobile broadband reception in places fibre doesn't Offer your customers speed and reliability in their holiday retreat, with outstanding signal reception that's ready for the imminent 5G roll-out Freq Range: 698-960/1710-2700/3300-3600/4800-5000 Gain 10-11 dBi Wind rating 150Km/h GSM/WiFi/3G/4G/LTE/5G **Size:** 445 x 210 x 70mm Remarks: 4G/5G



A. Aerials a.3 4G/5G



UPC 5702661096020

atellite Reception | Terrestrial Reception Dishes | Amplifiers | Receiver 109602 O5A 06W Omnidirectional 5G Antenna 6dB gain 5G antennas for holiday homes and motor homes **Brand:** Triax Wherever you are, it's ever more necessary to stay connected at the highest speed. In remote areas or in holiday homes, more and more people need to work in a fully functioning home office, or simply keep their teenagers occupied with online streaming. TRIAX 5G antennas boost mobile broadband reception in places fibre doesn't reach. Offer your customers speed and reliability in their holiday retreat, with outstanding signal reception that's ready for the imminent 5G roll-out Freq Range: 698-960/1710-2700/3300-3600/4800-5000 Gain 4-6 dBi Wind rating 150Km/h

Remarks: 4G/5G

GSM/WiFi/3G/4G/LTE/5G **Size:** 215 x 200 x 70mm



B. Dishes - LNB's - Brackets





| Satellite Reception

Terrestrial Reception

TPTV

| Dishes | Amplifiers | Receive

Headends

Brand: TechniSat

Antenna

B. Dishes - LNBs - Brackets

SATELLITE

Satellite Dishes / LNBs / Brackets Category Index



Triax Satellite dishes are built to the highest of standards and provide the best signal gains in their class.

B. Dishes / LNBs / Brackets

b.1 Dishes

b.2 Dish Kits

b.3 Portable dishes

b.4 Automatic dishes

b.5 LNBs and Brackets

Remarks: Page 1 of 6

b.1 Dishes

DISH SIZE

Single Satellite Dish Sizes



b.1 Dishes

b.1.1 60cm Satellite Dishes

b.1.2 65cm Satellite Dishes

b.1.3 80cm Satellite Dishes

b.1.5 100cm Satellite Dishes

b.1.1 60cm Dishes

1360/1674

TECHNITENNE 60 - TechniSat 60cm Dish

The 60 cm antenna dish is available in dark colouring so that the outdoor system can be selected to match the environment in which it is installed.

Article information EAN 4019588136748

Colour anthracite


Weight 2 kg

Device (W x H x D) 56.00 x 65.00 x 44.00 cm

Box 58.00 x 65.40 x 13.40 cm

General characteristics

Material steel

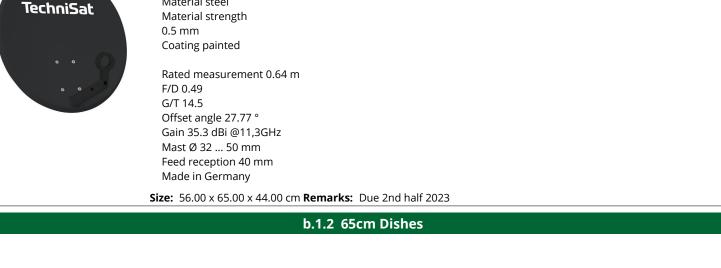



B. Dishes - LNB's - Brackets



Brand: Triax

Brand: Triax

Brand: Triax

b.1.2 65cm Dishes

| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

120504

TDA 65A RAL 7016, single pack 65cm Aluminium Dish Boxed

TRIAX TD Dishes The difference is clear - GEN 2 Dish includes Alloy LNB bracket and Wingnut Nuts.

Manufactured and tested to the highest standards of precision and quality, TRIAX's easy-to-install dishes offer outstanding performance, durability and reliability.

TDA: Aluminium

Unrivaled build quality, Aluminium

- long lasting Aluminium for extra corrosion protection
- TRIAX's unique cable protection system
- Every part, every accessory is weatherproofed
- 2 years corrosion warranty
- 5 years functionality warranty
- High gain for an exceptional signal
- One-click mounting system
- Self-locking screw & nuts

TRIAX is your reliable partner, with comprehensive service and support.

Remarks: 1 Box

120612

TDS 65 Single Boxed Dish

Colour RAL 7016

Solid construction of all parts

Anti corrosive galvanised steel with polyester coating

Non slip mast brackets

Made in Europe

Three year warranty

Single Boxed Dish - NO LNB

Size: Dish size 60x65cm

b.1.3 80cm Dishes

120510

TDS 80A Gen 2 80CM Satellite Dish

TRIAX TD Dishes The difference is clear

Manufactured and tested to the highest standards of precision and quality, TRIAX's easy-to-install dishes offer outstanding performance, durability and reliability.

TDS: Steel

Unrivaled build quality,

- Hot-dip galvanized steel for extra corrosion protection
- TRIAX's unique cable protection system

80CM GEN 2 Dish

Size: 80cm Remarks: TDS

b.1.5 100cm Dishes

120518

TDS 100LG RAL 7035, singlepack 100Cm Dish

100cm - Gen 2 Dish Brand: Triax



Manufactured and tested to the highest standards of precision and quality, TRIAX's easy-to-install dishes offer outstanding performance, durability and reliability. TDS: Steel

- Hot-dip galvanized steel for extra corrosion protection
- TRIAX's unique cable protection system
- Every part, every accessory is weatherproofed
- 2 years corrosion warranty
- 5 years functionality warranty
- High gain for an exceptional signal
- Quick and easy installation
- One-click mounting system
- Self-locking screw & nuts

Size: 97 x 87 cm **Remarks:** Supplied in 1 box

b.2 Dish Kits



B. Dishes - LNB's - Brackets

b.2 Dish Kits



Brand: Triax

Brand: TechniSat

122671B

Triax TDS 65 Dish x 5 and 5 x LNB Pack

R. Talax

5 x TDS 65cm Triax Satellite Dishes - Next Gen Model 5x 10750 LNB's (304440) Dark Colour RAL 7016 Contractor Pack All supplied in one handy pack

Remarks: Includes 5 x 10750 LNB

Remarks: 5 x Dish only no LNB

22672

TDA Contractor Pack of 5 TDA65 Aluminium Dishes



5 x TDA65cm Triax Aluminium Satellite Dishes with Aluminium LNB Holder -Next Brand: Triax Gen Model

Dark Colour - RAL7016 Contractor Pack

All supplied in one handy pack

No LNB

Remarks: ALU Dish with ALU LNB Holder - No LNB

DISHKIT3

Triax TDS 65cm Dish, LNB, Roof Mount



1 x Triax TDS 65cm Dish - Next Gen Model Brand: Triax 1 x Triax 10750 LNB (304440)

1 x Roof mount kit (FLEXI1) Supplied in one box

DISHKIT4

Triax TDS 65cm Dish , LNB and Wall Mount



1 x Triax TDS 65cm Dish - Next Gen Dish Brand: Triax

1 x Triax 10750 LNB (304440) 1 x Wall Mount (FOOT) Supplied in one box

Supplied in one box

DKTD64

Triax TDS 65cm Dish and LNB Pack



1 x Triax TDS 65cm Dish - Next Gen Dish 1 x Triax 10750 LNB (304440)


Remarks: Popular Item

b.3 Portable Dishes

SATMAN1

TechniSat

TechniSat Portable Satellite Dish Kit



SATMAN is a new portable dish from TechniSat.
The unique square 45cm dish performs like a 60cm dish extremely high performance from small form dish.
Our new portable version is on our heavy duty TRI base

The DigiDish 45 consists of high-quality aluminium and is powder-coated on both sides.

The carefully calculated parabolic shape ensures that the reception performance of the DigiDish 45

, which has a diameter of only 45 cm, is better than that of many 60 cm dishes Supplied with base, 10M cable, LNB

Polar white.

Size: 45.00 x 48.00 cm Remarks: New product May 2023

April-23 www.digitalimports.co.nz B Ph 03 344 5417 Fax 03 344 5419 B - Pg 3



B. Dishes - LNB's - Brackets



Brand: TechniSat

Brand: TechniSat

b.3 Portable Dishes

Terrestrial Reception Dishes | Amplifiers | Receiver

TechniSat Portable Satellite Dish Kit - Yellow Smiley

SATMAN is a new portable dish from TechniSat.

The unique square 45cm dish performs like a 60cm dish extremely high performance from a small form dish.

This new portable version is on our heavy duty TRI base

The DigiDish 45 consists of high-quality aluminium and is powder-coated on both

The carefully calculated parabolic shape ensures that the reception performance of the DigiDish 45

, which has a diameter of only 45 cm, is better than that of many 60 cm dishes

Supplied with base, 10M cable, LNB Special edition yellow smiley

Size: 45.00 x 48.00 cm Remarks: New product May 2023

SATMAN3

TechniSat

TechniSat Portable Dish Kit - FullTripod

SATMAN is a new portable dish from TechniSat. The unique square 45cm dish performs like a 60cm dish extremely high performance from small form dish.

This kit is on the TechniSat Tri Pod

The reception quality of this dish is outstanding.

Includes>

10M of Premium RG6 solid copper cable.

Quality Triax 10750 LNB

Easy to align elevation system.

2 Years Warranty - Supplied boxed.

Remarks: Retail Boxed

b.4 Automatic Dishes

The DigiDish 45 consists of high-quality aluminium and is powder-coated on both The carefully calculated parabolic shape ensures that the reception performance of the DigiDish 45 , which has a diameter of only 45 cm, is better than that of many 60 cm dishes Supplied with tri Pod, 10M cable, LNB Polar white - and available in Yellow smiley:) **Size:** 45.00 x 48.00 cm Remarks: New product QTR 3 - 2023 **TD5**4 Camper 54 Portable Satellite Dish Kit Unique fold up tripod stand design **Brand:** Triax Official Triax Brand 54CM Dish HD - 4K Ready Kit Includes: 10750 LNB, 10M RG6 Quick Connect Cable Supplied in a handy retail box. The dish is pre-assembled and will take 2 mins to clip together. Size: 54cm Dish Remarks: 4K Ready TPD54 Triax 54cm Portable Dish including cable and instructions Top of the line Triax Portable Dish **Brand:** Triax Heavy duty triangular base - Withstands wind. Adjustable legs for easy levelling Supplied boxed with full instructions and elevation stickers.

B-Pg4 Ph 03 344 5417 Fax 03 344 5419 April-23 www.digitalimports.co.nz



TechniSat

B. Dishes - LNB's - Brackets







| Satellite Reception | Terrestrial Reception

TPT\/

| Dishes | Amplifiers | Receivers

eadends | Anteni

Brand: TechniSat

SKYRIDER

Skyrider Technisat 65cm Automatic Dish

With the SKYRIDER 65, a satellite receiver specially designed for use in camper vans and mobile homes,

which guarantees the greatest possible TV and radio variety while on the go via satellite.

The heart of the SKYRIDER 65 is the controller unit, a small box that you place inside your camper van. The unit is connected to the satellite antenna on the roof and, at the other end, the controller is connected to a receiver such as a satellite receiver or television.

Device Size 67.00 x 18.50 x 98.00 cm

Weight 13.55 Kg

Gain 35.7 dBi

Supplied with 10750 Triax LNB

Pre Loaded as default for Optus D1.

Aprox. 30-180 seconds search Time

Auto Shut Down wire

12/24VDC

Size: 175mm Folded Remarks:

b.5 LNBs and Brackets

0019/8194

Universal LNB with satellite finder

Top features Brand: TechniSat

Universal LO: = 9750/10600 (Low band / High Band)

F connectors Feed-ø 40 mm

reeu-ø 40 mm

Integrated level meter and compass

LTE interference-safe

Optimised for camping: Quick alignment thanks to integrated level meter and $% \left(1\right) =\left(1\right) \left(1\right) +\left(1\right) \left(1\right) \left(1\right) +\left(1\right) \left(1\right) \left($

compass

Remarks: LO is 9750/10600 **UPC** 4019588198944

129426

TD-Series, Plastic LNB-holder Replaces 129422

TD-Series, Plastic LNB-holder Brand: Triax



Remarks: For Gen 2 TD Dishes

00719 TD Flexiblock Dual

Dual LNB holder suitable for Triax TD series dishes.

Brand: Triax

Quick and easy setup great for Optus D1 & D2 from one dish.

3 Deg to 10 Deg

Suitable for 40mm LNB

UPC 5702663007192

300721

Aluminum LNB holder for TD Series Dishes

Aluminium Bracket for TRIAX TD-dishes Brand: Triax

Better durability and robustness

New Product

Size: 40mm Dia LNB **UPC** 5702663007215

300728

April-23

TD Multiblock Triple LNB Holder

Triple LNB holder suitable for Triax TD series dishes. **Brand:** Triax

3 Deg to 20 Deg Suitable for 40mm LNB

Aluminium slide arm



Quick and easy set-up great for doing Optus D1,C1 & D2 from one dish.



B. Dishes - LNB's - Brackets



b.5 LNBs and Brackets tellite Reception | Terrestrial Reception | Dishes | Amplifiers | Receivers TD Flexiblock 2x LNB, 3-10° TD Flexiblock 2x LNB, 3-10° for two Ø40 mm LNBs (LNB is not included) is **Brand:** Triax available for the TD dish series. **Triax Quad LNB** 304836 Triax Universal LNB **Brand:** Triax 4 Outputs suitable to feed 4 set top boxes 2 Year warranty QTY'S 10+,30+ Remarks: LO 9750/10600 **Triax Quattro LNB** Triax Universal LNB **Brand:** Triax 4 Outputs (H&V high band / H&V low band) Designed for multiswitches QTY'S 10+,30+ 2 Year warranty **Remarks:** LO 9750/10600 304855 Triax 10750 LNB Triax Quality Single 10750 LNB **Brand:** Triax Horizontal and Vertical poles Bulk Qty Available: 📝 Rubber boot cable protection **QTY'S** 10+,30+ 0.3 dB Noise 2 Year warranty Remarks: LO 10750 UPC 5702663048553 **Triax LNB 11300** Triax Single Quality LNB 11300 **Brand:** Triax Horizontal and Vertical poles Bulk Qty Available: 📝 Rubber boot cable protection QTY'S 10+,30+ 0.3 dB Noise 2 Year warranty Remarks: LO 11300 UPC 5702663048591 Wing nuts, zinc alloy M8 Wing nuts, zinc alloy M8 **Brand:** Triax For use with Triax TD dishes - Most suitable for TDA

Polybag with 6x8mm wing nuts

Remarks: 6 Pcs **UPC** 5702667522202



April-23

SKY Dish LNB Adaptor NZ Model

LNB Bracket Suitable for Sky Satellite Dishes **Brand: OEM**





C. Set Top Boxes (Receivers)



C. Set Top Boxes (Receivers)

Dishes | Amplifiers | Re

Brand: Philips

C. Set Top Boxes (Receivers)

SET TOP BOXES

Set Top Box (Receivers) Category Index

We have a range of STB's from Satellite / Terrestrial and IPTV to Hybrid options

- C. Set Top Box (Receivers)
- c.1 Satellite
- c.2 Terrestrial
- c.3 IPTV

Remarks: Page 1 of 2

c.1 Satellite

DSR4022

Philips Neoviu S2 Satellite Receiver

DVB S2 Satellite receiver with front USB socket for PVR function.

1 x HDMI Output

1 x SCART Output


12VDC operation and supplied 230VAC PSU Preloaded with Freeview and 10750 LNB

Simple operation small ans compact - easy to use and Philips reliability make this a

Mount behind TV - bracket and mounting option supplied

Size: 120 x 75 x 20mm



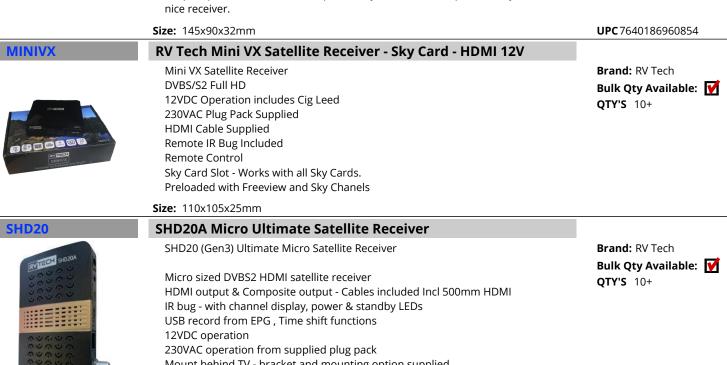



C. Set Top Boxes (Receivers) c.2 Terrestrial



Brand: Triax

Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
T3	TERRABOX T3 DTT Receiver	
Technisat On the Control of the Cont	The TechniSat Terrestrial receiver is our new Freeview compatible Receiver DVB-T/T2 with H.265/HEVC and H.264 LCN Support Recording function via USB (DVRready) The remote can control both: receiver and TV - TV Learning function ISI mode: simplified device control SEMI Twin Tuner LED Display HDMI and EURO-SCART Internet radio function Full 1080p Output and amazing picture quality	Brand: TechniSat
	TechniSat is a high quality German company renowned for top quality products and innovation.	UPC 4019588049277

c.3 IPTV

MAG520 IP STB 4K

MAG520 and MAG520w3 are high-performance Linux set-top boxes based on the Amlogic S905X2 chipset.

They have an ARM Cortex-A53 CPU that is 25% more powerful than previous MAG $\,$ generation and a better GPU, which ensures smooth 4K video playback at 60 fps. Great for Projectors and TV's without IPTV tuners,

This STB is suitable for TDX and TDcH IPTV and Flow systems.

Size: 127 x 87 x 30mm





D. Connectors



atellite Reception | Terrestrial Reception


Amplifiers | Receiver

D. Connectors

COAXIAL

Connectors Category Index

We offer a large range of connectors suitable for all types of Coaxial cables



D. Connectors d.1 F Type Connectors d.2 RG11 Connectors d.3 Adaptors

Remarks: Page 1 of 5

d.1 F Type Connectors

Remarks: Available in bags of 100pcs

12B6FSLB

Self Lock F Type Connector - Push On

Self install Purple band F con for Rg6, No Tool Required.

Brand: OEM



F Compression Connector - Short

Short Sized Triax F Compression Connector To Be Used With Compression Tool 370042

Brand: Triax

Bulk Qty Available: 🗹 QTY'S 10+,30+,50+,100+

UPC 9340591004898

F Push On Connector

Size: 5.1/6.8

Self Install - No Tool Required Used On RG6 Cable

Brand: Triax

Bulk Qty Available: 📝 QTY'S 10+,30+,50+,100+



Size: 5.1/6.8 **Remarks:** Available in boxes of 25

360913

Triax F Compression 5,1/6,8 - Long

Long Sized Triax F Compression Connector To Be Used With Compression Tool 360919 **Brand:** Triax

Brand: Triax

Bulk Qty Available: 🗹 QTY'S 10+,30+,50+,100+



Size: 5.1/6.8 Remarks: Available in bags of 100pcs

F-compression connector CX3 7.0 QM with o-ring,

F-56-CX3 7.0 QM (Quick-mount)

F-compression connector quick mount for very easy mounting on the coax cables.

Waterproof. With o-ring.

Fast mounting, no braid fold back Perfect for hard cables with PE-jacket

Remarks: 50pcs per box



F Type Hex Crimp Connector

Niton Hex Crimp Connector To be Used With Hex Crimp Tool Suits RG6 Cable and TX100 Cable

Brand: Triax

Bulk Qty Available: 📝 QTY'S 10+,30+,50+





D - Pg 1 April-23 Ph 03 344 5417 Fax 03 344 5419 www.digitalimports.co.nz



d.1 F Type Connectors



Dishes | Amplifiers | Receivers | ellite Reception | Terrestrial Reception Headends | Antennas |

Radial F Crimp



Radial Crimp Connector To be Used With Radial Crimp Tool Suits RG6 Cable Sky Approved

Brand: OEM

Bulk Qty Available: 🗹 QTY'S 10+,30+,50+

75FT

F Twist On Connector



Easy Install Twist On Connector For RG6, No Tool Required Alternative Code 370039, 370001

Brand: Starview

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

RG59

F Twist On RG59 Connector

Twist Connector For RG59 Cable

Brand: OEM

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

RG59WC


F Radial Crimp RG59 Connector

Radial Crimp Connector For RG59 Cable

Brand: OEM

Bulk Qty Available: 🔰 QTY'S 10+,30+,50+

SKYNZ Approved Compression Connector for Quad, Tri, RG6



Engineered from precision machined copper alloy, UV protected POM, PVC and rubber

Mil spec bright nickle plating on all metal parts.

The ANYTOOLTM design works with ANY standard compression tool.

Brand: OEM

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

d.2 RG11 Connectors

RG11 F Crimp

RG11 Hex Connector For Commercial RG11 Cable

Brand: Triax

Bulk Qty Available: 🔰 QTY'S 10+,30+,50+

Size: 7.6/11.7

71157

RG11 F Compression Connector

Cablecon RG11 Compression Connector To Be used With 360920 Compression Tool Top quailty RG11 connector.

Brand: Cable Con

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

Size: 10.5

711572

RG11 F Compression Connector

Triax RG11 Compression Connector To Be used With 360920 Compression Tool Top quality RG11 connector

Brand: Cable Con

Bulk Qty Available: 🧹

QTY'S 10+,30+,50+

Size: 11.3





d.3 Adapters



| Satellite Reception | Terrestrial Reception

1 ---

Receiver

Headends

Antennas

d.3 Adapters

153076

F Female/F Female Joiner



Alternative Code 75FJ

Brand: Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+



F Female/F Female Joiner



Triax Extra Long F Joiner A+ Standard 3 GHZ Rated High Quality Connector **Brand:** Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

153592 - 75FFA

F Female/F Male Angled Adaptor

High Performance Right Angled F Type Adaptor Alternative Code 75FFA **Brand:** Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

153593

F Female/F Female Joiner

Triax F Joiner With Nut Included

Brand: Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

Remarks: Available in bags of 5pcs

153613

F Female/Belling Lee Male Adaptor



Alternative Code 75FM Convert Triax 360913 F Compression Into Belling Lee Male **Brand:** Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

153614

F Female/Belling Lee Female Adaptor



Alternative Code 75FF
Convert Triax 360913 F Compression Into Belling Lee Female

Brand: Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

154110

Koswi 4 Male Belling Lee Angled



Triax A+ to M Belling Lee Right Angled Joiner Resolves the problem of external interference on in-house TV installations Outer Jacket Included Self install connector - No Tool Required. Highest level sheilding available - LTE certified. **Brand:** Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

75FA

April-23

F Female/F male Angled Joiner

Right Angled F Type Adaptor

Brand: Starview
Bulk Qty Available:

QTY'S 10+,30+,50+









Headends | Antennas |

F Female to Belling Lee Female Adaptor




Alternative Code 153614 Convert Triax 360913 F Compression Into Belling Lee Female **Brand:** Starview

Bulk Qty Available: 🗹 QTY'S 10+,30+,50+

75FJ

F Female/F Female Joiner



Brand: Starview

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

F Female/Belling Lee Male Adaptor



Alternative Code 153613 Convert Triax 360913 F Compression Into Belling Lee Male **Brand:** Starview

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

75FMF

F Male/Belling Lee Female Adaptor



Brand: Starview

Bulk Qty Available: 🔰 QTY'S 10+,30+,50+

F Male/Belling Lee Male Adaptor

Converts Belling Lee Female Into F Type Male

Brand: Starview

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

Belling Lee Female/Belling Lee Female Joiner



Brand: Starview

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

75FQ

F Female/F Male Quick Adaptor

Commercial Grade Quick Male F Type Connector For RG6 Cable

Brand: Starview

Bulk Qty Available: 📝 **QTY'S** 10+,30+,50+

April-23

F Female/F Male Quick Adaptor

High Performance Quick Male F Type Connector For RG6 Cable

Brand: Starview Bulk Qty Available: 📝

QTY'S 10+,30+,50+



D - Pg 4 Ph 03 344 5417 Fax 03 344 5419 www.digitalimports.co.nz



D. Connectors d.3 Adapters



| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

75FRCA

F Female/RCA Male Adaptor

Convert F Type Male Into RCA Male

Brand: Starview

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

75FRCAF

F Female/RCA Female Adaptor

Convert F Type Male Into RCA Female

Brand: Starview

Bulk Qty Available: **QTY'S** 10+,30+,50+

75MM

Belling Lee Male/Belling Lee Male Joiner

Join 2 Female Belling Lee Sockets

Brand: Starview

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

75RAF

F Female/Belling Lee Female Adaptor

Right Angled Belling Lee Adaptor

Brand: Triax

Bulk Qty Available: **V** QTY'S 10+,30+,50+

75RAM

F Female/ to right angle Belling Lee Male Adaptor

Right Angled Belling Lee Adaptor Alternative Code 153550 **Brand:** Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

75T

BNCBNC

F Terminating Connector

75 Ohm F Terminator

Brand: Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

BNC to BNC Joiner

F to F BNC Joiner Brand: OEM

FBNC F Female/BNC Adaptor

Convert F Female To BNC Male

Brand: Starview

Bulk Qty Available: **QTY'S** 10+,30+,50+

QTY'S 10+,30+,50+



E. Coaxial Splitters / Taps




tellite Reception | Terrestrial Rec

E. Coaxial Splitters / Taps

SPLITTERS - TAPS

Coaxial Splitters and Taps Category Index



E. Coaxial Splitters and Taps e.1 Splitters e.2 Taps

Remarks: Page 1 of 7

e.1 Splitters

340110

Triax Sat Diplexer




Inputs: sat and uhf Output: sat and uhf combined

Connection type: F-type

Tv Input range: 5-860MHz Loss 2.0dB Sat Input range: 950-2400MHz Loss 2.0/3.0dB

Output range: 5-2400MHz Power pass: On satellite leg

Triax Brackets Small 1-4



Brand: Triax


Brand: Triax

Bulk Qty Available: 📝

QTY'S 10+,30+,50+



Triax Brackets Large 6-8



Brand: Triax

Brand: Triax

Brand: Triax



ACV 12 - 12 Way Splitter 1GHz

ACV 12-12 - 12 way splitter, one-sided connectors

TRIAX splitter all round performance for use in CATV, SMATV & MATV

Frequency range 5-1000 MHz

High shielding

Return loss Grade 2

High quality die cast housing Sn coated

All ports AC/DC blocked at inner conductor - TAP Quality

Tap loss (in-tap) 5-40 MHz 12.3 dB

Tap loss (in-tap) 40-470 MHz 12.5 dB

Tap loss (in-tap) 470-1000 MHz 14.5 dB

> Remarks: Shielding effeciency VHF/UHF > 110 dB UPC 5702663432550

343256

ACV 16 16 Way Splitter 1GHz

ACV 16-16 - 16 way splitter, one-sided connectors

TRIAX splitter all round performance for use in CATV, SMATV & MATV

Frequency range 5-1000 MHz High shielding

Return loss Grade 2


High quality die cast housing Sn coated

All ports AC/DC blocked at inner conductor Tap loss (in-tap) 5-40 MHz 14.5 dB

Tap loss (in-tap) 40-470 MHz 14.8 dB

Tap loss (in-tap) 470-1000 MHz 16.2 dB

> **Remarks:** Shielding effeciency VHF/UHF > 110 dB UPC 5702663432567





E. Coaxial Splitters / Taps e.1 Splitters





Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
349806	Triax 6 Way Splitter	
	All ports power pass - diode steered 5-2400MHz Side entry Insertion loss (in-out) 40-1000 Mhz Insertion loss (in-out) 5-40 Mhz 10.8 dB	Brand: Triax Bulk Qty Available: QTY'S 10+,30+,50+
	Insertion loss (in-out) 1000-2150 MHz 15.5 dB	UPC 5702663498266
349808	Triax 8 Way Splitter	
	All ports power pass - diode steered 5-2400MHz Side entry Insertion loss (in-out) 40-1000 Mhz Insertion loss (in-out) 5-40 Mhz Insertion loss (in-out) 1000-2150 MHz Insertion loss (in-out) 1000-2150 MHz	Brand: Triax Bulk Qty Available: QTY'S 10+,30+,50+ UPC 5702663498082
349822	Triax 2 Way Splitter	
Carlot Star 1A	SCS 2 All ports power pass - diode steered 5-2400MHz Side entry Insertion loss (in-out) 40-1000 Mhz	Brand: Triax Bulk Qty Available: QTY'S 10+,30+,50+
	Insertion loss (in-out) 1000-2150 MHz 5.5 dB	UPC 5702663498228
349823	Triax 3 Way Spiltter - Replaces 349803	
The state of the s	All ports power pass - diode steered 5-2400MHz Side entry Return loss (in-out) 1000-2150 MHz Return loss (in-out) 2150-2400 MHz Return loss (in-out) 40-1000 MHz 12.0 dB	Brand: Triax Bulk Qty Available: QTY'S 10+,30+,50+ UPC 5702663498037
349824	Triax 4 way Splitter Replaces 349804	
O COLATOR OF THE PARTY OF THE P	All ports power pass - diode steered 5-2400MHz Side entry Insertion loss (in-out) 40-1000 Mhz Insertion loss (in-out) 5-40 Mhz Insertion loss (in-out) 1000-2150 MHz Insertion loss (in-out) 1000-2150 MHz	Brand: Triax Bulk Qty Available: QTY'S 10+,30+,50+
	<u> </u>	UPC 5702663498044
511102	CTS 2400 - TV/SAT combiner (diecast) CTS 2400 - TV/SAT combiner. TRIAX CTS 2400 filter, tv, sat, 5-862/950-2400 MHz	Brand: Triax Bulk Qty Available: QTY'S 10+,30+,50+
	Remarks: 1: Loss 2.0 2:loss 2.5	
SDPF	Starview Terrestrial/Satellite Combiner	
OUT BOY SAT IN HOUSE TO	Starview side entry Satellite / Terrestrial Diplexer Loss 5-862 <3dB Loss 950-2400 <3.5dB	Brand: Starview Bulk Qty Available: QTY'S 10+,30+,50+
SSF2	Starview 2 way Splitter Power Pass to all Ports	
	All ports power pass - diode steered	Brand: Starview



All ports power pass - diode steered 5-2400MHz Front Entry Loss 5-40 4.2dB Loss 40-1000 5.0dB Loss 1000-2050 5.8dB

Bulk Qty Available: 📝 **QTY'S** 10+,30+,50+





e.1 Splitters I RIAX

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

SSF3

Starview 3 Way Splitter Power Pass to all Ports

All ports power pass - diode steered 5-2400MHz

Front Entry

Loss 5-40 7.5dB Loss 40-1000 8.2dB Loss 1000-2050 10.5dB **Brand:** Triax

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

SSF4

Starview 4 Way Splitter Power Pass to all Ports



All ports power pass - diode steered 5-2400MHz Front Entry

Loss 5-40 8.2dB Loss 40-1000 8.5dB Loss 1000-2050 11.0dB **Brand:** Starview

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

SSF6

Starview 6 Way Splitter Power Pass to all Ports



All ports power pass - diode steered 5-2400MHz Front Entry

Loss 5-40 11.2dB Loss 40-1000 12.5dB Loss 1000-2050 16.5dB **Brand:** Starview

Bulk Qty Available: **QTY'S** 10+,30+,50+

SSF8

Starview 8 Way Splitter Power Pass to all Ports



All ports power pass - diode steered 5-2400MHz Front Entry

Loss 5-40 12.0dB Loss 40-1000 13.0dB Loss 1000-2050 17.5dB **Brand:** Starview

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

e.2 Taps

342110

Triax SCT 1-10, 1 Way Tap



SCT 1-10 Tap - Triax Triax tap ideal for SAT-IF and MATV distribution networks.

Frequency range 5-2400 MHz

High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 2.7 dB Insertion loss (in-out) 40-1000 Mhz 1.9 dB

Brand: Triax

342112

Triax SCT 1-12, 1 Way Tap



Triax tap ideal for SAT-IF and MATV distribution networks.

Frequency range 5-2400 MHz

High shielding

High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 2.3 dB Insertion loss (in-out) 40-1000 Mhz 1.6 dB

Brand: Triax

342116

Triax SCT 1/16 Tap



Triax tap ideal for SAT-IF and MATV distribution networks.

Frequency range 5-2400 MHz

Return loss Grade 3

High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 2.1 dB Insertion loss (in-out) 40-1000 Mhz 1.3 dB Brand: Triax







tellite Reception | Terrestrial Reception | Dishes | Amplifiers | Receivers | 342120 Triax SCT 1/20 Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 1.7 dB Insertion loss (in-out) 40-1000 Mhz 1.1 dB 342124 Triax SCT 1/24 Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 1.7 dB Insertion loss (in-out) 40-1000 Mhz 342157 Triax SCT 2-10, 2 Way Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 4.5 dB Insertion loss (in-out) 40-1000 Mhz Triax SCT 4-20, 4 Way Tap TRIAX coaxial tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax • Frequency range 5-2400 MHz • DC pass via trunk line IN-OUT • High shielding against ingress noise like radiated by LTE mobile • High quality die-cast housing tin (Sn) coated with solder shield bottom plate Insertion loss (in-out) 40-1000 Mhz 1.8 dB Insertion loss (in-out) 1000-2150 MHz 2.8 dB **Size:** 17mm x 58mm Remarks: 20dB Triax SCT 2-12, 2 Way Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 4.4 dB Insertion loss (in-out) 40-1000 Mhz 2.8 dB Triax SCT 2/16 Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 3.8 dB Insertion loss (in-out) 40-1000 Mhz 2.2 dB Triax SCT 2/20 Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated

1.6 dB

Insertion loss (in-out) 2150-2400 Mhz 3.5 dB

Insertion loss (in-out) 40-1000 Mhz



e.2 Taps



| Dishes | Amplifiers | Receivers | ellite Reception | Terrestrial Reception Triax 4/12, 4 Way Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 5.3 dB 4.3 dB Insertion loss (in-out) 40-1000 Mhz 342416 Triax SCT 4-16, 4 Way Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 3.9 dB Insertion loss (in-out) 40-1000 Mhz Triax SCT 4-24, 4 Way Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated End of Line: Insertion loss (in-out) 2150-2400 Mhz 1.8 dB Insertion loss (in-out) 40-1000 Mhz 0.9 dBTriax SCT 6-16, 6 Way Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 5.6 dB Insertion loss (in-out) 40-1000 Mhz 3.8 dB 342620 Triax SCT 6/20, 6 Way Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz DC pass through on trunk IN-OUT High shielding Return loss Grade 3 Insertion loss (in-out) 2150-2400 Mhz 4.5 dB Insertion loss (in-out) 40-1000 Mhz 2.3 dB 342816 TriaxSCT 8/16 Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 5.9 dB Insertion loss (in-out) 40-1000 Mhz 3.8 dB UPC 5702663421677 342820 Triax SCT 8/20 Tap Triax tap ideal for SAT-IF and MATV distribution networks. **Brand:** Triax Frequency range 5-2400 MHz Return loss Grade 3 High quality die-cast housing tin (Sn) coated Insertion loss (in-out) 2150-2400 Mhz 4.8 dB Insertion loss (in-out) 40-1000 Mhz 2.2 dB **IKU2063** Tap 4 outputs 25 dB replaces 342424 Interior Brand: Ikuzi 5-2.400 MHz

F Connection





E. Coaxial Splitters / Taps TRIAX e.2 Taps tellite Reception | Terrestrial Reception | Dishes | Amplifiers | Receivers | Headends | Antennas | Starview 1 Way Satellite Tap, 14dB Loss Starview ST2/14 Tap Satellite and Terrestrial Low loss Front Entry 5 - 2400MHz **Brand: Starview** Bulk Qty Available: 🗹 **QTY'S** 10+ 40-1000MHz 1.8dB 1000-2400MHz 3.0dB **ST1/18** Starview 1 Way Satellite Tap, 18dB Loss Starview ST1/18 Tap: Satellite and Terrestrial: Low loss **Brand:** Starview 5 - 2400MHz Bulk Qty Available: 📝 **QTY'S** 10+ Insert loss: 40-1000MHz 1.5dB 1000-2400MHz 1.8dB ST2/14 Starview 2 Way Satellite Tap, 14 dB Loss Starview ST2/14 Tap: Satellite and Terrestrial: Low loss **Brand:** Starview 5 - 2400MHz Bulk Qty Available: 📝 QTY'S 10+ Insert loss: 40-1000MHz 3.2dB 1000-2400MHz 3.5dB **ST2/18** Starview 2 Way Satellite Tap, 18 dB Loss Starview ST2/18 Tap: Satellite and Terrestrial: Low loss **Brand: Starview** 5 - 2400MHz Bulk Qty Available: 📝 QTY'S 10+ Insert loss: 40-1000MHz 2.5dB 1000-2400MHz 2.8dB ST2/22 Starview 2 Way Satellite Tap, 22 dB Loss Starview ST2/22 Tap: Satellite and Terrestrial: Low loss **Brand: Starview** 5 - 2400MHz Bulk Qty Available: 📝 QTY'S 10+ Insert loss: 40-1000MHz 2.5dB 1000-2400MHz 2.8dB ST4/12 Starview 4 way Satellite Tap, 12dB Loss Starview ST4/12 Tap: Satellite and Terrestrial: Low loss **Brand: Starview** 5 - 2400MHz Bulk Qty Available: 🗹

Insert loss:

40-1000MHz 5.0dB 1000-2400MHz 5.5dB

Starview 4 Way Satellite Tap, 14 dB Loss

Starview ST4/14 Tap :Satellite and Terrestrial :Low loss

5 - 2400MHz

Insert loss:

4.5dB 1000-2400MHz 5.2dB

40-1000MHz

Starview 4 Way Satellite Tap, 18 dB Loss

Starview ST4/18 Tap: Satellite and Terrestrial: Low loss 5 - 2400MHz

Insert loss:

40-1000MHz 3.0dB 1000-2400MHz 3.5dB

QTY'S 10+

Brand: Starview

Brand: Starview

QTY'S 10+

QTY'S 10+

Bulk Qty Available: 📝

Bulk Qty Available: 🗹

E - Pg 6 Ph 03 344 5417 Fax 03 344 5419 March-23 www.digitalimports.co.nz







e.2 Taps itellite Reception | Terrestrial Reception | Dishes | Amplifiers | Receivers | Headends | Antennas | Starview 4 Way Satellite Tap, 22 dB Loss Starview ST4/22 Tap: Satellite and Terrestrial: Low loss **Brand:** Starview 5 - 2400MHz Bulk Qty Available: 🗹 **QTY'S** 10+ Insert loss: 40-1000MHz 1.5dB 1000-2400MHz 2.0dB **ST6/16** Starview 6 Way Satellite Tap, 16 dB Loss Starview ST6/16 Tap: Satellite and Terrestrial: Low loss **Brand: Starview** 5 - 2400MHz Bulk Qty Available: 📝 QTY'S 10+ Insert loss: 40-1000MHz 5 OdB 1000-2400MHz 7.8dB Starview 6 Way Satellite Tap, 20 dB Loss Starview ST6/20Tap: Satellite and Terrestrial: Low loss **Brand: Starview** 5 - 2400MHz Bulk Qty Available: 📝 **QTY'S** 10+ Insert loss: 40-1000MHz 3.0dB 1000-2400MHz 5.5dB Starview 6 Way Satellite Tap, 25 dB Loss Starview ST6/25 Tap: Satellite and Terrestrial: Low loss **Brand:** Starview 5 - 2400MHz Bulk Qty Available: 📝 QTY'S 10+ Insert loss: 40-1000MHz 2 0dB 1000-2400MHz 4.2dB **ST8/16** Starview 8 Way Satellite Tap, 16 dB Loss Starview ST8/16 Tap: Satellite and Terrestrial: Low loss **Brand: Starview** 5 - 2400MHz Bulk Qty Available: 🔰 **QTY'S** 10+ Insert loss: 40-1000MHz 5.0dB 1000-2400MHz 7.8dB **ST8/20** Starview 8 Way Satellite Tap, 20 dB Loss Starview ST8/20 Tap: Satellite and Terrestrial: Low loss **Brand:** Starview 5 - 2400MHz Bulk Qty Available: 📝 **QTY'S** 10+ Insert loss: 40-1000MHz 3.0dB 1000-2400MHz 5.5dB

Starview 8 Way Satellite Tap, 25 dB Loss

Starview ST8/25 Tap: Satellite and Terrestrial: Low loss



5 - 2400MHz

40-1000MHz 2.0dB 1000-2400MHz 4.2dB

Insert loss:

Brand: Starview Bulk Qty Available: 🔰

QTY'S 10+



F. Mounting Hardware

F. Mounting Hardware




tellite Reception | Terrestrial Reception

F. Mounting Hardware

MOUNTING

Mounting Hardware Category Index

Digital Imports provide a huge range of mounting options. Our mounts are a mixture from our own manufacturing plant using NZ steel, Local sourced suppliers and imported products to fill the gaps.



- f.1 Terrestrial Mount Kits
- f.2 Satellite Mount Kits
- f.3 Fixed Stays
- f.4 Telescopic Stays
- f.5 Portable Mounts
- f.6 Mounting Parts

f.6.1 Bases

f.6.2 Poles

Remarks: Page 1 of 9

f.1 Terrestrial Mount Kits

140116

Outrigger Mount

25mm Outrigger 400mm

Brand: SV



Aerial mount 1M Pole Galv - Steel Stays

Flexi Mount for Aerials Flexi Base 1.0M Mast

Complete with Fixed Stays and U-Bolts

Galv Product

Supplied with all bolts and tek screws

Brand: SV

Bulk Qty Available: 📝 QTY'S 10+,30+,50+

DIAM1000K

Aerial Mount kit 1M Galv - Aluminium Stays

Flexi Mount for Aerials Flexi Base, 1.0M Mast

Complete with Fixed Stays and U-Bolts Galv Base and Mast, Aluminium Stays Supplied with all bolts and tek screws

Bulk Qty Available: 🔰 QTY'S 10+,30+,50+

DIAM1500

Aerial mount 1.5 M Pole Galv - Steel Stays

Flexi Mount for Aerials Flexi Base, 1.5M Mast

Complete with Fixed Stays and U-Bolts

Galv Product

Supplied with all bolts and tek screws

Brand: SV

Brand: SV

Bulk Qty Available: 📝

QTY'S 10+,30+,50+

DIAM1500K


Aerial Mount Kit 1.5M Galv - Aluminium Stays

The Flexi Mount for Aerials Flexi Base, 1.5M Mast

Complete with Fixed Stays and U-Bolts Galv Base and Mast, Aluminium Stays Supplied with all bolts and tek screws

Brand: SV

Bulk Qty Available: 📝









F. Mounting Hardware f.1 Terrestrial Mount Kits



Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
DIAM2000	Aerial Mount Kit 2M Pole Galv - Steel Stays	
	The Flexi Mount for Aerials Flexi Base, 1900mm Mast Complete with Fixed Stays and U-Bolts Galv Product Supplied with all bolts and tek screws Size: 1900mm Height Mast	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
DIAM2000K	Aerial Mount Kit 2.0M Pole - Aluminium Stays	
	The Flexi Mount for Aerials Flexi Base, 1900mm Mast Complete with Fixed Stays and U-Bolts Galv Product - ALUMINIUM STAYS Supplied with all bolts and tek screws Size: 1900m Mast Pipe Remarks: 2.0M -ALUMINIUM STAYS	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
DIHS1000	Hockey Stick 1M	
	25mm Pipe, 1000mm Plastic Top Cap Galv Dipped Steel	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
DIHS1200	Hockey Stick 1200mm	
	25mm Pipe, 1200mm Plastic Top Cap Galv Dipped Steel	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
DIHS1500	Hockey Stick 1500mm	
	25mm Pipe, 1200mm Plastic Top Cap Galv Dipped Steel	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
DIHS2000	Hockey Stick 2000mm	
	25mm Pipe, 2000mm Plastic Top Cap Galv Dipped Steal	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
DIHS500	Hockey Stick 500mm	
	25mm Pipe, 500mm Plastic Top Cap Galv Dipped Steel	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
DIRM1000	Ridgemount 1000mm Pipe	
<u> </u>	Mast with flexible base , 1000mm Galv dipped steel Comes with 4 Tek Screws	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+



F. Mounting Hardware f.1 Terrestrial Mount Kits



Satellite Recepti	f. Prrestrial Mount Kits on Terrestrial Reception IPTV Dishes Amplifiers Receive	rs Headends Antennas
DIRM300	Ridgemount 300mm Pipe Mast with flexible base , 300mm Galv dipped steel Comes with 4 Tec Screws	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
DIRM500	Ridgemount 500mm Pipe Mast with flexible base , 500mm Galv dipped steel Comes with 4 Tek Screws	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
HS500	Hockey Stick 500mm - 32mm Pipe 500mm Hockey Stick 150mm from plate to bend 32mm Pipe Galv Dipped Plastic Top Cap	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
HS900	Hockey Stick 900mm 900mm Hockey Stick 30mm Pipe Galv Dipped Plastic Top Cap Drain Hole	Brand: SV Bulk Qty Available: QTY'S 10+,30+,50+
MAST1000	1000mm Aerial Mast and Base ONLY AM Roof mount Base, and 1M Aerial Mast Pole Only. DIAM1000 Kit without Stays or bolts. For those who like to choose TELE Stays for Aerial Mounts	Brand: SV Bulk Qty Available: QTY'S 10+,30+
MAST1500	1500mm Aerial Mast and Base ONLY AM Roof mount Base, and 1.5M Aerial Mast Pole Only. DIAM1500 Kit without Stays or bolts. For those who like to choose TELE Stays for Aerial Mounts	Brand: SV Bulk Qty Available: QTY'S 10+,30+
MAST2000	2.0M Aerial Mast and Base - No stays AM Roof mount Base, and 2M Aerial Mast Pole Only. DIAM2000 Kit without Stays or bolts. For those who like to choose TELE Stays for Aerial Mounts	Brand: SV Bulk Qty Available: QTY'S 10+,30+
S-POLE	S Pole Aerial Mount solution for Satellite mount kits S-Pole Mount, Great product for mounting an aerial to a Satellite mount. 2 x V-clamps Galv dipped product Aprox 1480mm high	Brand: SV
1	Size: 1480mm Long	



F. Mounting Hardware f.1 Terrestrial Mount Kits



UPC 5702661310928

UPC 5702661310942

Bulk Qty Available: 🗹

Brand: SV

Brand: Triax

-POLE1200 **S Pole Mount soultion 1200 Shorter Pole** S-Pole Mount, **Brand:** SV Great product for mounting an aerial to a Satellite mount. 2 x V-clamps Galv dipped product 1200mm from top to bottom Aprox. f.2 Satellite Mount Kits 131092 25cm Aluminium Wall Bracket High Quality Wall Bracket for Euroline Dishes or 6-15 Element Aerials **Brand:** Triax

13109

45cm Aluminium Wall Bracket

Suitable for harsh environments

2.5mm Aluminium

Size: 48mm Diameter

High Quality Wall Bracket for Euroline Dishes or 6-15 Element Aerials

Suitable for harsh environments

Remarks: Wall Mounting 155 x 155 x 3 mm

Standard Satellite Under Eve Mount Kit

Galv dipped **Brand: SV** 2 Telescopic Stays

Complete with bolts and screws

FLEXI-76

76mm Flexi Roof Mount Kit including Stays

FLEXI 76 Kit: **Brand:** SV 76mm x 700mm Galv Pole

Large base plate for roof mounting (420mm)

3 x base plates for Stay roof mounting with mounting stud (270mm)

3 x 700-1250mm Tele Stays

Nuts and Bolt Kit including Tek screws

100% Made in NZ with NZ Steel

Size: 700mm x 76mm

FLEXI1 Satellite Mount Kit 550mm Mast

550mm pole

2 Telescopic stays Bulk Qty Available: 📝 Suitable for 45-64cm satellite dishes QTY'S 10+,30+,50+

Complete with all bolts and screws

Our most popular Satellite mount

- 420mm wide base for modern profile roofs

Size: 44mm Pipe

FLEXI2 Satellite Mount Kit Heavy Duty 800mm Mast

> 800mm pole **Brand: SV** 2 Telescopic stays Bulk Qty Available: 📝

Suitable for 78-88cm satellite dishes QTY'S 10+,30+,50+

Complete with all bolts and screws - 420mm wide base for modern profile ro'

Size: 44mm Pipe



F. Mounting Hardware f.2 Satellite Mount Kits



Flexi_Lite Flexi Mount Lite - Short Base - Eco price Special Flexi Mount with Short Base **Brand:** SV 550mm pole Bulk Qty Available: 🗹 2 Telescopic stays - Tele500, Tele700 QTY'S 10+,30+,50+ Suitable for 45-64cm satellite dishes Complete with all bolts and tek screws - Now with 260mm wide base Size: 550mm Pipe Remarks: Short Base **FOOT Simple Wall Mount** Simple cost effective mount for Satellite Installations **STARLINK**¹ Starlink Internet Dish Mount Kit - 500mm Starlink Dish Mount Kit **Brand: SV** For use on New Zealand roofs Bulk Qty Available: 📝 New Zealand made mount QTY'S 10+,30+,50+ 500mm Pole 2 x Tele 700 Stay Designed for use with the latest Rectangle Dish system. Made in New Zealand with NZ steel. Size: 500mm **STARLINK2** Starlink Internet Dish Mount Kit - 1000mm Starlink Dish Mount Kit - Extra high pole model. **Brand:** SV For use on New Zealand roofs Bulk Qty Available: 📝 New Zealand made mount QTY'S 10+,30+,50+ 1000mm Pole 1 x Tele 700 Stay 1 x Tele 500 Stay Designed for use with the latest Rectangle Dish system. **STARLINK3** Starlink Internet Dish Mount Kit - 1800mm Aprox Starlink Dish Mount Kit - 1800mm Super high pole model. Brand: SV For use on New Zealand roofs Bulk Qty Available: 📝 New Zealand made mount QTY'S 10+,30+,50+ Aprox. 1800mm Pole 2 x Tele 700 Stay Designed for use with the latest Rectangle Dish system where serious height is required to clear roofs or trees. Other lengths avaiable on request Size: 1800mm Aprox Remarks: Unable to ship to Rural WALL1 **Standard Wall Mount Kit** Galvanised Steel Brand: SV 2 Telescopic Stays Complete with bolts and screws

f.3 Fixed Stays



F. Mounting Hardware f.3 Fixed Stays





Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
DISB10A	1M Stay Ubolt Clamp Aluminum	
	1000mm Aluminium Stay with U-Bolt Clamp	Brand: SV
V2/0		Bulk Qty Available:
		QTY'S 10+,30+,50+
	Size: 1000mm	
DISP10C		
DISB10G	1M Stay Ubolt Clamp - Steel 1000mm Steel Stay with U-Bolt Clamp	Brand: SV
	1000Hill Steel Stay with 0-bolt Clamp	Bulk Qty Available: 📝
		QTY'S 10+,30+,50+
	Size: 1000mm	
DISB15A	1.5 mtr Stay Clamp - Aluminum	
	1500mm Steel Stay with U-Bolt Clamp	Brand: SV
90/0		Bulk Qty Available:
		QTY'S 10+,30+,50+
	Size: 1500mm	
DISB15G	Size: 1500mm 1.5M Stay Ubolt Clamp - Steel	
DISD ISG	1500mm Steel Stay with U-Bolt Clamp	Brand: SV
Chr	1500mm Seed Stay With O Bolt Clamp	Bulk Qty Available: 📝
		QTY'S 10+,30+,50+
	Size: 1500mm	
DISB20A	2.0M Aluminum Stay with Ubolt	
	2000mm Aluminum Stay with U-Bolt Clamp	
10/0		Bulk Qty Available: QTY'S 10+,30+,50+
		Q113 101,301,301
	Size: 2000mm	
DISB20G	2.0M Stay Ubolt Clamp - Steel	
The state of the s	2000mm Steel Stay with U-Bolt Clamp	Brand: SV
		Bulk Qty Available: 📝
		QTY'S 10+,30+,50+
	Size: 2000mm	
STYB	Stay Bracket	
	Stay bracket, with M8 Stud, Galv Nut, Spring and Flat Washer. Used to give extra roof or wall support to Tele / Fixed Stays	Brand: SV
6	Pre Galv Steel.	QTY'S 10+,30+,50+
transmitted to the		
	Size: 270 x 63mm Remarks: M8 Stud	
UBOLT	Ubolt Kit for Stays	
	U-Bolt for 25mm Pole	Brand: SV
		Bulk Qty Available:
		QTY'S 10+,30+,50+

f.4 Telescopic Stays



F. Mounting Hardware



f.4 Telescopic Stays

| Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

TELE1000

Tele Stay 1000mm



Tele Stay 1000mm 1000 - 1700mm Galv Steel Brand: SV

Bulk Qty Available: **QTY'S** 10+,30+,50+

TELE1000U

1000mm - 1700mm Telestay with U Bolt



Tele Stay 1000mm 1000 - 1700mm Galv Steel UBOLT Brand: SV

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

TELE1500

Tele Stay 1500mm



Tele Stay 1500mm 1500 - 2250mm Galv Steel Brand: SV

Bulk Qty Available: **V** QTY'S 10+,30+,50+

TELE1500U

1500mm - 2250mm Telestay with UBOLT



Tele Stay 1500mm 1500 - 2250mm Galv Steel UBOLT Brand: SV

Bulk Qty Available: **Y** QTY'S 10+,30+,50+

TELE250

250mm Tele Stay



Tele Stay 250mm 250 - 300mm Galv Steel Brand: SV

Bulk Qty Available: QTY'S 10+,30+,50+

TELE500

500mm Tele Stay



Tele Stay 500mm 500 - 900mm Galv Steel **Brand:** SV

Bulk Qty Available: **QTY'S** 10+,30+,50+

TELE500U

500mm - 900mm Telestay with U Bolt



Tele Stay 500mm 500 - 900mm Galv Steel UBOLT Brand: SV

Bulk Qty Available: **QTY'S** 10+,30+,50+

TELE700

Tele Stay 700mm



Tele Stay 700mm 700 - 1300mm Galv Steel Brand: SV

Bulk Qty Available: **QTY'S** 10+,30+,50+



F. Mounting Hardware

f.4 Telescopic Stays



| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

TELE700U

700mm - 1300 Telestay with UBOLT



Tele Stay 700mm 700 - 1300mm Galv Steel UBOLT Brand: SV


Bulk Qty Available: **Y** QTY'S 10+,30+,50+

Brand: TechniSat

f.5 Portable Mounts

0000/1749

Aluminum camping stand



This camping satellite tripod enables a 45 cm satellite antenna to be set up quickly and easily. Thanks to its lightweight aluminum construction and foldable legs, the tripod can be transported in a space-saving manner in the trunk or in a free corner of the mobile home. The mounted satellite antenna can be fixed at a height of up to 120 cm. An ideally suited tripod for use when camping, where quick assembly and disassembly as well as easy transport are important.

Mast 42mm Material 0.8mm

Size: 920 mm - 1450mm **Remarks:** New product QTR 3 - 2023 **UPC** 4019588017498

TRI

Portable Mount Heavy Duty

Used to mount either 54 or 64 cm Triax Dish for portable applications

Brand: SV

Bulk Qty Available: **Y** QTY'S 10+,30+,50+



f.6.1 Bases

Remarks: For 25mm Pole

AM-Base

AM Series Base Plate Kit - Inlcudes Bolts

Aerial Mast Base designed for 25mm Mast Pipe Complete with M6 Nut / Bolt / Spring washer **Brand:** SV



Under Eve Bracket for Hockey Sticks

Heavy Duty Under Eve mount for all DI Hockey Sticks

Brand: SV

Brand: SV

Brand: SV

Laser Cut / Folded

QTY'S 10+,30+,50+

Bulk Qty Available: 📝



FLEXI76 BASE

Flexi Base for Large 76mm Pipe

Flexi mount base only (satellite mount base suitable for 76mm Poles)

Pre-Galv Steel

Size: 220 x 62mm

Heavy Duty -420mm

Lasercut from 1 piece steel with holes and slots designed for New Zealand modern

roofs.

Size: 420mm **Remarks:** For 76mm Poles



44mm Flexi Pole Mount Base

Flexi mount base only (satellite mount base suitable for 44mm Poles)

Pre-Galv Steel - 420mm long

Lasercut from 1 piece steel with holes and slots designed for New Zealand modern

roofs.

Size: 420mm x 63mm **Remarks:** For 44mm Poles





F. Mounting Hardware f.6.1 Bases



f.6.1 Bases TRIAX

Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas			
Flexi_Lite_base	Flexi Lite Base				
	Flexi mount base only (satellite mount base suitable for 44mm Poles) Pre-Galv Steel - 260mm long	Brand: SV			
	Lasercut from 1 piece steel with holes and slots designed for New Zealand modern				
. —	roofs.				
	Eco Price Version.				
	Size: 260mm x 60mm Remarks: For 44mm Poles				
f.6.2 poles					
44POLE-1000	44mm Flexi Pole 1000mm Long				
	44mm Diameter Galv Dipped Pole for Flexi Roof Mounts 1000mm Long NZ Made Steel	Brand: SV			
	Use with (FLEXI BASE) & (TELESTAYS) to make your own custom roof kit. Suggested Tele Stays $-2 \times TELE1000$ Size: 44×1000 mm				
44POLE-1200	44mm Flexi Pole 1200mm Long				
	44mm Diameter Galv Dipped Pole for Flexi Roof Mounts 1200mm Long NZ Made Steel	Brand: SV			
	Use with (FLEXI BASE) & (TELESTAYS) to make your own custom roof kit. Suggested Tele Stays - 1 \times TELE1000 and 1 \times TELE1500 Size: 44 \times 1200mm				
44POLE-1500	44mm Flexi Pole 1500mm Long				
	44mm Diameter Galv Dipped Pole for Flexi Roof Mounts 1500mm Long NZ Made Steel	Brand: SV			
	Use with (FLEXI BASE) & (TELESTAYS) to make your own custom roof kit. Suggested Tele Stays - 1 \times TELE1000 and 1 \times TELE1500 Size: 44 \times 1500mm				
44POLE-550	Flexi Mount Pole Galv and drilled 550mm				
Flexi1_Pole	44mm Diameter Galv Dipped Pole for Flexi Roof Mounts 550mm Long NZ Made Steel	Brand: SV			
	Use with (FLEXI BASE) & (TELESTAYS) to make your own custom roof kit. Suggested Tele Stays - 1 \times TELE500 and 1 \times TELE700				
	Size: 44 x 550mm				
44POLE-800	Flexi 2 Pole - Cut/Drilled & Galved 800mm				
Flexi2_Pole	44mm Diameter Galv Dipped Pole for Flexi Roof Mounts 800mm Long NZ Made Steel	Brand: SV			
	Use with (FLEXI BASE) & (TELESTAYS) to make your own custom roof kit. Suggested Tele Stays - $2 \times \text{TELE700}$				
	Size: 44 x 800mm				
44POLE-900	44mm Flexi Pole 900mm Long				
	44mm Diameter Galv Dipped Pole for Flexi Roof Mounts 900mm Long NZ Made Steel	Brand: SV			
	Use with (FLEXI BASE) & (TELESTAYS) to make your own custom roof kit. Suggested Tele Stays -2 x TELE700 Size: 44 x 900mm				
U	***				



F. Mounting Hardware f.6.2 poles



Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
76POLE-1000	76mm Flexi Pole 1000mm Long	
	76mm Diameter Galv Dipped Pole for heavy duty Roof Mounts 1000mm Long NZ Made Steel	Brand: SV
•	Use with (FLEXI 76 BASE) & (TELESTAYS) to make your own custom roof kit.	
	Size: 76 x 1000mm	
76POLE-1200	76mm Flexi Pole 1200mm Long	
	76mm Diameter Galv Dipped Pole for heavy duty Roof Mounts 1200mm Long NZ Made Steel	Brand: SV
•	Use with (FLEXI 76 BASE) & (TELESTAYS) to make your own custom roof kit.	
	Size: 76 x 1200mm	
76POLE-700	700mm Flexi Large Pole (76mm)	
	76mm Diameter Galv Dipped Pole for heavy duty Roof Mounts 700mm Long NZ Made Steel	Brand: SV
•	Use with (FLEXI 76 BASE) & (TELESTAYS) to make your own custom roof kit.	
	Size: 76 x 700mm	
76POLE-900	76mm Flexi Pole 900mm Long	
	76mm Diameter Galv Dipped Pole for heavy duty Roof Mounts900mm Long NZ Made Steel	Brand: SV
	Use with (FLEXI 76 BASE) & (TELESTAYS) to make your own custom roof kit.	
	Size: 76 x 900mm	





G. Installation Accessories

Satellite Reception | Terrestrial Reception

IPTV

ishes | Amplifiers | Receive

Headends

Antennac

G. Installation Accessories

INSTALLATION

Installation Accessories Category Index



- g.2 Bonding and Earthing
- g.4 Screws and Silicon
- g.5 Cable Clips
- g.6 Cable Ties

Remarks: Page 1 of 4

g.1 Wall Plates

BPLATE-1

Brush wall Plate TYPE 1



Brush style cable entry plate, Tidys up all those cables. **Brand:** OEM


Bulk Qty Available: 📝

QTY'S 10+,30+,50+

UPC 9340591004188

C-CLIP

C-CLIP for Wallplates



Brand: OEM

Bulk Qty Available: **V** QTY'S 10+,30+,50+

WPB

Wall Plate Blank 1 Hole

Blank plate with hole for cable.

Brand: OEM

Bulk Qty Available: **V** QTY'S 10+,30+,50+

WPB2F

Wall Plate with 2 F Joiners

Wall plate with 2 x F joiners

Brand: OEM

Bulk Qty Available: **V** QTY'S 10+,30+,50+



g.2 Bonding and Earthing

0000/5765

Earth Bonding Bar 5



For earthing of multiswitches or amplifiers

5 Connectors

With high quality double F-sockets

Frequency range up to 3 $\,\mathrm{GHz}$

UPC 4019588057654

Brand: Triax

Brand: TechniSat

305345

TMM 5 IN BB Earth Bonding

TMM 5 Input Earth Bond Bar for use with TMM 5 Input Multiswitch or TMM $\,$

Amplifier



Size: 141 x 29 x 40mm

g.4 Screws And Silicon

March-23 www.digitalimports.co.nz **G** Ph 03 344 5417 Fax 03 344 5419 **G - Pg 1**





g.4 Screws And Silicon

| Dishes | Amplifiers | Receivers |

35mm Tek Screws Metal



35mm Metal tek Screw - 12 guage

Remarks: 35mm

12GX50

50mm Tek Screw Wood

Wood Tek Screw -12 Guage



Size: 50mm

65mm Tek Screw Wood

Wood Tek Screw -12 Guage



Remarks: 65mm

12GX75

75mm Tek Screw Wood

These Tek screws are ideal for installing mounts onto metal roofs and onto walls with timber frame construction.



Remarks: 75mm Wood Screw

100mm Tech Screw Wood

100mm Tech Screw - 14 gage



Remarks: 100mm

14g x 75 Galv Type 17 Woodfix screw



These Tech screws are ideal for installing mounts onto metal roofs and onto walls with timber frame construction.

Currently used in our Flexi Mount Roof Kits

M6 x 40 Zinc Engineers Bolts / Nuts

BE06*040Z

Remarks: Used in Flexi1 Kits Size: 75mm



M6 Mild Steel Nut & Bolt Used in AM Roof mount Kits

Size: M6

BHT06*0202

M6 x 20 ZP Zinc Plated Hi Tensile



M6 Bolt, High Tensile Used in DIUEB Brackets

Size: 20mm M6



TRIAX

g.4 Screws And Silicon

| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

M8/5/16

M8 Spring Galv Washer



M8 Galv Spring Washer Used in Flexi1 and Flexi2 Kits

Size: M8

N₀6Z

M61.0p Zinc Full Nut



M6 Nut - Mild Steel Used in DIUEB Brackets

Size: M6

STKS10-16*01G

10-16 x 16 HWF Steel Fix Screws



15mm Tek Screw Metal, Used in Tele Stays and Flexi1 Mount Kits

Size: 15mm

WS06Z

M6 Spring Washer Zinc



M6 Spring Washer Used in DIUEB and AM Mounting Kits

Size: M6 Spring Washer

g.5 Cable Clips

CCC100BLK

7mm Coaxial clips for Masonary and Timber Surfaces -Black




Cable clip Black suitable for RG6 Cables. Brand: OEM

Remarks: Box of 100pcs

CCC100W

7mm Coaxial clips for Masonary & Timber Surfaces - White



Brand: OEM

Brand: Ezi-Fix



Remarks: Box 100pcs **UPC** 9340591005055

g.6 Cable Ties

EF4136E

150 x 3.6 Black Cable Tie



EziFix Cable Ties 150 x 3.6mm - Black Brand: Ezi-Fix

Remarks: Bag of 100

EF4248B

200 x 4.8 Black Cable Tie

EziFix Cable Ties 200 x 4.8mm - Black

Remarks: Bag of 100







g.6 Cable Ties

| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

EF4336B

300 x 3.6 Black Cable Tie

EziFix Cable Ties 300 x 3.6mm - Black

Brand: Ezi-Fix

Remarks: Bag of 100

FF4448B 380 x 4.

380 x 4.8 Black Cable TieEziFix Cable Ties 380 x 4.8mm - Black

Brand: Ezi-Fix



Remarks: Bag of 100



H. Solar and Lithium



tellite Reception | Terrestrial Reception

H. Solar and Lithium

SOLAR & LITHIUM

Solar and Lithium Category Index

Solar Pannels and Lithium Batterys H. Solar and Lithium

h.1 Solar Panels h.2 Lithium Batterys

Remarks: Page 1 of 4

h.1 Solar Panels

PV100

100W 12V Crystalline 850 x 670mm

- Mono 5 year mechanical warranty
- 25 year linear warranty to 70% power output
- Max.Power(Pmax)100Wp
- Maximum Operating Current(Im) 4.62A
- Maximum Operating Voltage 21.65V
- Open Circuit Voltage 26.79V
- Short Circuit Current 5.05A
- · Series Fuse 15A
- Withstand high wind loads and snow loads (5400Pa)
- · Anti-reflective highly transparent, low iron tempered glass
- Transmission rate 3.18%
- 850(H)*670(W)*30(D)

Freight charges apply to Trade Accounts.

Size: 850x670x30 Remarks: 100W

PV175

175W 12V Crystalline Panel

- Mono 5 year mechanical warranty
- 25 year linear warranty to 70% power output
- Max.Power(Pmax)175Wp
- Maximum Operating Current(Im) 8.97A
- Maximum Operating Voltage 19.5V
- Open Circuit Voltage 23.51V
- Short Circuit Current 9.15A
- Series Fuse 15A
- Withstand high wind loads and snow loads (5400Pa)
- · Anti-reflective highly transparent, low iron tempered glass
- Transmission rate 3.18%
- 1485(H)*675(W)*30(D)
- Super Slime Line Panel

Freight charges apply to Trade Accounts.

Size: 675 x 1485 x 30 Remarks: 175W

PV290

March-23

290W 24V Mono Crystaline Panel

- Mono 5 year mechanical warranty
- 25 year linear warranty to 70% power output
- Max.Power(Pmax)290Wp
- Maximum Operating Current(Im) 8.91A
- Maximum Operating Voltage 32.55V
- Open Circuit Voltage 39.50V
- Short Circuit Current 9.20A
- Series Fuse 15A
- Withstand high wind loads and snow loads (5400Pa)
- Anti-reflective highly transparent, low iron tempered glass
- Transmission rate 3.18%
- 1645(H)*995(W)*40(D)

Freight charges apply to Trade Accounts.

Size: 995x1645x40mm Remarks: 290W





H - Pg 1 Ph 03 344 5417 Fax 03 344 5419 www.digitalimports.co.nz

Brand: RV Tech

Brand: RV Tech

Brand: RV Tech







Brand: RV Tech

| Dishes | Amplifiers | Rec 345W Mono Solar Panel 36V • Mono 5 year mechanical warranty Brand: RV Tech • 25 year linear warranty to 70% power output Max.Power(Pmax)345Wp • Maximum Operating Current(Im) 8.88A • Maximum Operating Voltage 38.94V Open Circuit Voltage 46.80V • Short Circuit Current 9.34A • Series Fuse 15A • Withstand high wind loads and snow loads (5400Pa) · Anti-reflective highly transparent, low iron tempered glass • Transmission rate 3.18% • 1960(H)*990(W)*40(D) Freight charges apply to Trade Accounts. **Size:** 990x1960x40mm Remarks: 345W

h.2 Lithium Batterys

LI-12-100BMS 12V 100AH Lithium Iron Phosphate Battery With BMS-BT

Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

LITHIUM BATTERY
DEEP CYCLE SERIES
12.8V 100AH

Nominal Voltage 12.8V
Nominal Capacity 100 Ah
Energy 1280Wh
Cycle Life >5000 @ 0.5C 50% DOD
Efficiency 97-99%
Charge Voltage 14.6 +- 0.2V
Charger Current 25A
Max Charge 50A
Continuous Current 50A
Max. Pulse Current 100A <1s
Discharge Cut off 10V
Weight 11.6 Kg

Size: 342*173*212mm Remarks: Bluetooth & BMS







Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

LI-12-150BMS

12V 150AH Lithium Iron Phosphate Battery With BMS-BT

Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.



Nominal Voltage 12.8V
Nominal Capacity 150 Ah
Energy 1920Wh
Cycle Life >5000 @ 0.5C 50% DOD
Efficiency 97-99%
Charge Voltage 14.6 +- 0.2V
Charger Current 25A
Max Charge 50A
Continuous Current 50A
Max. Pulse Current 100A <1s
Discharge Cut off 10V
Weight TBA

LI-12-200BMS

12V 200AH Lithium Iron Phosphate Battery With BMS-BT

Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.




Nominal Voltage 12.8V
Nominal Capacity 200 Ah
Energy 2560Wh
Cycle Life >2000 @ 1.0C 100% DOD
Efficiency 97-99%
Charge Voltage 14.6 +- 0.2V
Charger Current 50A
Max Charge 100A
Continuous Current 50A
Max. Pulse Current 200A <3s
Discharge Cut off 10V
Weight 26.5 Kg
SOC - LED & BT

Size: 522*240*224mm Remarks: BMS system and Bluetooth

Brand: RV Tech







Brand: RV Tech

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

LI-24-100BMS

24V 100AH Lithium Iron Phosphate Battery With BMS-BT

Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.




Nominal Voltage 25.6V
Nominal Capacity 100 Ah
Energy 2560Wh
Cycle Life >2000 @ 1.0C 100% DOD
Efficiency 97-99%
Charge Voltage 29.2 +- 0.2V
Charger Current 50A
Max Charge 100A
Continuous Current 50A
Max. Pulse Current 100A <3s
Discharge Cut off 21.6V
Weight 26 Kg
SOC - Options LED & BT

Size: 522 x 240 x 220mm **Remarks:** Plastic ABS Case

LI-48-100-5U

48V 100 AH 5U rack-mount lithium-ion battery system



Standard Terminals

Contact us for bulk , or special builds / set ups

PW-51V-100AH

51V-100AH - 5000WH Power Wall Lithiium Ion Battery

Size: 442 x 222 (5U) x 400mm Remarks: 47Kg - 5U Rack Mount

RVTECH - power wall 51V - 100A/H $\,$ - Designed for Victron 48 systems. Data bus connect up to 64 battery's giving a whopping 320 KWH of storage Connected through the data bus makes the system work as one battery. Bult in BMS , and BMS data Bus compatible with Victron BMS Front panel menu for viewing Capacity, remaining , temp , A/H , and current + more

Contact us for bulk , or special builds / set ups. Also availbale in 200 A/H

Brand: RV Tech

Brand: RV Tech





I. Multiswitches and Distribution

I. Multiswitches/ Distribution




tellite Reception | Terrestrial Re

I. Multiswitches/ Distribution

MULTISWITCH

Multiswitch and Distribution Category Index



i.2 Multiswitches

Remarks: Page 1 of 3

i.1 Digital Modules

CDM8

Commercial 8 Way Distribution System

Commercial Version of our popular DDM8 System.

Can be powered from any of the TV outlets or from the 18VDC input.

Switch to select 12VDC to power Masthead Amps. Separate Satellite / Terrestrial or combined input.

COFDM Digital Modulator input.

Designed for New Zealand and Digital Television.

<= 1dBuV loss

Size: 140 x 120 x 43mm

Brand: SV

Bulk Qty Available: 📝 QTY'S 10+,30+



Digital Distrubution Module 4 Way

Digital 4 basic Multiswitch is a cost effective way to distribute satellite, Digital TV and an RF return around your home.

Remarks: 18VDC PSU

The Digital 4 is available as a standalone multiswitch or with a flush mounting cabinet. (350 x 275 x 90mm) -DDM8CAB

No Loss +/-1dBuV per leg. - 18VDC F-Type power supply included.

Remarks: Subscriber outputs x 4



Brand: Starview

QTY'S 10+,30+

Bulk Qty Available: 📝

Bulk Qty Available: 📝 **QTY'S** 10+,30+



Digital Distrubution Module 8 Way

Digital 8 basic Multiswitch is a cost effective way to distribute satellite, Digital TV and a RF return around your home.

The Digital 8 is available as a standalone multiswitch or with a flush mounting cabinet. (350 x 275 x 90mm) DDM8CAB

No Loss +/- 1dBuV per Leg 18VDC F-Type Power Supply included

Remarks: Subscriber outputs x 8

DDM8 Bracket

Bracket for mounting DDM4 or DDM8 in Signet style Cabinet.

Brand: SV



Brand: SV



Flush mount cabinet for DDM8 module

Flush mount Cabinet for DDM8 and DDM4 Multiswitch. Complete with Hinged Door



i.2 Multiswitches

I - Pg 1 Ph 03 344 5417 Fax 03 344 5419 March-23 www.digitalimports.co.nz



I. Multiswitches and Distribution





i.2 Multiswitches tellite Reception | Terrestrial Receptior | Dishes | Amplifiers | Receiv

TMS/CKR 5x8 S Multiswitch



Standalone multiswitch for 1 Satellite position with 5 inputs and 8 outputs, suitable for distributing satellite and terrestrial signals in small and medium sized systems. Dependability guaranteed: a 6-year warranty is our guarantee that TRIAX's core values of reliability and innovation are the foundation of our new multiswitches. The TMS/CKR 5x8 S offers excellent performance and flexibility, with a compact design for installations even in confined spaces.

Brand: Triax

Remarks: 6 Year Warranty

318622

TMS/CKR 5x12 S Multiswitch



Standalone multiswitch for 1 Satellite position with 5 inputs and 12 outputs, suitable for distributing satellite and terrestrial signals in small and medium sized

Dependability guaranteed: a 6-year warranty is our guarantee that TRIAX's core values of reliability and innovation are the foundation of our new multiswitches. The TMS/CKR 5x12 S BS offers excellent performance and flexibility, with a compact design for installations even in confined spaces.

Brand: Triax

Brand: Triax

Remarks: 6 Year Warranty

TMS/CKR 5x16 S BS Multiswitch




Standalone multiswitch for 1 Satellite position with 5 inputs and 16 outputs, suitable for distributing satellite and terrestrial signals in small and medium sized

Dependability guaranteed: a 6-year warranty is our guarantee that TRIAX's core values of reliability and innovation are the foundation of our new multiswitches. The TMS/CKR 5x16 S BS offers excellent performance and flexibility, with a compact design for installations even in confined spaces.

Excellent performance **Remarks:** 6 Year Warranty

TMS/CKR 5x24 S BS Multiswitch




Dependability guaranteed: a 6-year warranty is our guarantee that TRIAX's core values of reliability and innovation are the foundation of our new multiswitches. The TMS/CKR 5x24 S BS offers excellent performance and flexibility, with a compact design for installations even in confined spaces. **Excellent performance**

Brand: Triax

Brand: Triax

TMS/CKR 5x32 S BS Multiswitch



Standalone multiswitch for 1 Satellite position with 5 inputs and 32 outputs, suitable for distributing satellite and terrestrial signals in small and medium sized

Remarks: 6 Year Warranty

Dependability guaranteed: a 6-year warranty is our guarantee that TRIAX's core values of reliability and innovation are the foundation of our new multiswitches. The TMS/CKR 5x32 S BS offers excellent performance and flexibility, with a compact design for installations even in confined spaces. **Excellent performance**

Remarks: 6 Year Warranty UPC 5702663186255

MS406P

Starview 5 x 6 Multiswitch With Power Supply



MS406P 5 x 6 Multiswitch with 22KHz Tone Outputs and +/- 2dB of Insertion Loss Starview Multiswitches are built to a high standard and come complete with full wiring digrams.

They are designed to deliver the least loss on your digital system. All versions require power supplies and are supplied with a plug pack.

Plug packs are connected to the multiswitch via an F Connector allowing you to have the power supply in a separate location to the multiswitch.

Remarks: Subscriber outputs 6

Brand: Starview

Bulk Qty Available: 📝 **QTY'S** 10+

I - Pg 2 March-23 www.digitalimports.co.nz Ph 03 344 5417 Fax 03 344 5419



I. Multiswitches and Distribution



i.2 Multiswitches

| Dishes | Amplifiers |

MS408P

Starview 5 x 8 Multiswitch With Power Supply

MS408P 5 x 8 Multiswitch with 22KHz Tone Outputs and +/- 2dB of Insertion Loss Starview Multiswitches are built to a high standard and come complete with full wiring digrams.

They are designed to deliver the least loss on your digital system.

All versions require power supplies and are supplied with a plug pack.

Plug packs are connected to the multiswitch via an F Connector allowing you to have the power supply in a separate location to the multiswitch.

Brand: Starview Bulk Qty Available: 📝

QTY'S 10+

Remarks: Subscriber outputs 8

MS412P

Starview 5 x 12 Multiswitch With power Supply

MS412P 5 x 12 Multiswitch with 22KHz Tone Outputs and +/- 2dB of Insertion Loss Starview Multiswitches are built to a high standard and come complete with full wiring digrams.

They are designed to deliver the least loss on your digital system.

All versions require power supplies and are supplied with a plug pack.

Plug packs are connected to the multiswitch via an F Connector allowing you to have the power supply in a separate location to the multiswitch.

Remarks: Subscriber outputs 12

Brand: Starview

Bulk Qty Available: 📝 QTY'S 10+









J. Amps/ Filters /Mast





J. Amps/ Filters /Mast

AMPS/FILTER/MAST

Amplifers, Filters and Mast Products Category Index

J. Amplifiers Domestic - Commercial

- j.1 Domestic Amplifiers
- j.2 Commercial Amplifiers
- j.3 Masthead Electronics
- i.4 Attenuators
- i.5 Filters / Line Electronics

Remarks: Page 1 of 7

j.1 Domestic Amps

334021

LTE 2 Way IR Pass Amplifier

Distributes IR to multiple TVs around the home - FM & DAB

Allows control of Sky Digital receivers when used with Triax Digital Links

1 Input 2 Output

Short circuit protected on each output

Power on LED: F-Connectors

Mains powered

9VDC/15mA on outputs

Gain 10 +/-2 dB: 470-790 MHz

UPC 5702663340213

Brand: Wolsey

Brand: Wolsey

334022

LTE 4-Way IR Pass Amplifer

Distributes IR to multiple TVs around the home - FM & DAB

Allows control of Sky Digital receivers when used with Triax Digital Links

2 Input 4 Output

Short circuit protected on each output

Power on LED: F-Connectors

Mains powered

9VDC/15mA on outputs

Gain 10 +/-2 dB: 470-790 MHz

UPC 5702663340220

Brand: Wolsey



LTE IR Pass Amplifier 8 Way -Wolsey

Distributes IR to multiple TVs around the home - FM & DAB

Allows control of Sky Digital receivers when used with Triax Digital Links

2 Input 8 Output

Short circuit protected on each output

Power on LED: F-Connectors

Mains powered

9VDC/15mA on outputs

Gain 10 +/-2 dB: 470-790 MHz

UPC 5702663340244

Brand: Wolsey



LTE IR Pass Amplifier 12 Way _ Wolsey

Distributes IR to multiple TVs around the home - FM & DAB

Allows control of Sky Digital receivers when used with Triax Digital Links

2 Input 12 Output

Short circuit protected on each output

Power on LED

F-Connectors

Mains powered

9VDC/15mA on outputs

Gain 10 +/-2 dB :85...790 MHz

UPC 5702663340251

Brand: Triax

AFA Micro Amp UHF 12db, 5-12V

UHF Gain 12db

Max. Output level @ 60 dB IMD 95 dBuV

Input 1 - frequency 470...862MHz

5-12VDC - 10...22 mA

UPC 5702663400122

j.2 Commerical Amps





j.2 Commerical Amps



Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax

ellite Reception | Terrestrial Rec Dishes | Amplifiers |

TSWA Satellite Wideband Amplifier

TSWA Satellite Wideband Amplifier

The TWSA amplifier is designed for wideband applications, where satellite frequencies from 290 MHz to 2340 MHz are used. The amplifier has two inputs, one for the vertical and one for the horizontal feed. The low band and high bands are combined on one feed. This amplifier is compatible with wideband LNBs

> Remarks: Requires 18VDC PSU UPC 5702663077775

GHV530 Amplifier

The GVH 530 is a low noise coaxial house distribution amplifier, for use in small

CATV distribution networks in small building units.

Optimized for 1 GHz technology

Downstream 20/30dB amplification / high output level

Adjustable potentiometer or click attenuater

All connections are f connectors without return path

Extensive ESD and surge protection

Low power consumption

Size: 170 x 100 x 65mm

GHV 920 20 dB, 0-15dB eq Amplifier

Triax GHV 900 series is a low noise coaxial house- and apartment- distribution amplifier, for use in smaller CATV distribution networks in multi dwelling houses.

Output level CSO @ 60 dB IMD 98 dBµV

98/100 dB_µV Output level CSO @ 60 dB IMD (42 ch) Slope 0/7 dB Output level CTB @ 60 dB IMD (42 ch) Slope0/7 dB 98/100 dB_µV

Output level IMD 2, EN 50083-3 104 dBµV Output level IMD 3, EN 50083-5 107 dBµV 120 dBuV Output level return path

Size: 170 x 100 x 65mm UPC 5702663231504

GHV 930 30 dB , 0-15dB eq A class Amp

Triax GHV 900 series is a low noise coaxial house- and apartment- distribution **Brand:** Triax amplifier, for use in smaller CATV distribution networks in multi dwelling houses.

Output level CSO @ 60 dB IMD 101 dBuV

Output level CSO @ 60 dB IMD (42 ch) Slope 0/7 dB 101/103 dBµV

Output level CTB @ 60 dB IMD (42 ch) Slope0/7 dB 101/103 dBuV

Output level IMD 2, EN 50083-3 104 dBuV Output level IMD 3, EN 50083-5 107 dBµV

Output level return path 120 dBµV

Size: 170 x 100 x 65mm UPC 5702663231580

GHV935 Triax Amplifier

Triax GHV 900 series is a low noise coaxial house- and apartment- distribution **Brand:** Triax

amplifier, for use in smaller CATV distribution networks in multi dwelling houses.

Output level CSO @ 60 dB IMD 103 dBµV

Output level CSO @ 60 dB IMD (42 ch) Slope 0/7 dB 105/107 dBµV

Output level CTB @ 60 dB IMD (42 ch) Slope0/7 dB 105/107 dBµV

Output level IMD 2, EN 50083-3 104 dBuV 107 dBµV Output level IMD 3, EN 50083-5

Output level return path 120 dBuV

Size: 170 x 100 x 65mm UPC 5702663231627

323166

GHV 940 - 40 dB amplifier

The GHV 940 is a low noise coaxial (NE4) House Distribution Amplifier, for use in

medium to large CATV distribution networks in multidwelling houses.

Cost effective 1 GHz technology.

Adjustable attenuation and equalization settings in 1dB steps using rotary

switches and jumpers. 0...15dB, Eq 0...15

Switchable VHF Band I (RC=OFF) or 5-65 MHz Return Path (RC=ON).

Selectable Return Path: On/Off, Active/Passive.

Upstream 26/32 dB amplification / High output level.

Downstream 40 dB amplification / high output level.

Size: 169 x 76 x 65mm

J - Pg 2 Ph 03 344 5417 Fax 03 344 5419 March-23 www.digitalimports.co.nz

























































j.2 Commerical Amps



323170

Triax GPV 950 High Output Amplifier 41dB Cast Case

GPV 950 are high output Distribution Amplifiers for use in CATV distribution networks in multi-dwelling premises primarily. Switching of the basic gains enables to configure the amplifiers as line extender or as cascade amplifier in trunk position.

Rotary switches in 1 dB steps for settings of attenuation and equalization: 0...15dB

Downstream: 85...1006 MHz by max. output level 113 dBuV Upstream: 5-65 MHz, max. output 120 dBuV (high load performance for DOCSIS

3.x, KDG-Class D)

Basic gain selectable via jumpers

Return path mode selectable: active / passive / off Excellent and stable amplifier characteristics

Low power consumption because of high efficient switching PSUs

Extensive ESD and surge protection

Size: 145 x 180 x 70mm

3461

Independent amplifier IF-SAT AFI-190 Replaces 300385

Unit to amplify a satellite polarity

1 satellite 950-2450 MHz input port, with gain adjustment potentiometer; 1 terrestrial coupling 5-790 MHz input port;

1 satellite+Terrestrial output port;

1 output test port.

• Line powering of LNB. Voltage/tone injection for selection of polarity and band by rotary commutator.



TMB 1500UK Terr. Channel Pro.

The programmable Terrestrial Channel Processor TMB 1500 can receive TV signals from multiple terrestrial antennas. It combines filtering, converting, level equalization and amplifying of broadcast channels – all this within a very compact unit in order to boost the sum signal into the coaxial TV distribution network in multi-dwellings or hospitality premises.

4 antenna inputs: FM / DAB-VHF / 2xUHF

Flex Matrix with 15 filters per 1...6 MUX for individual channel processing to any output channel

Real-time AGC separately on all multiplexes 50 dB suppression of adjacent channels

Automatic switch between LTE 700-5G/800-4G rejection Option to compensate cable tilt by reducing FM and DAB-VHF output level compared to UHF level Setup locking with security code

Switchable remote feeding 0/12/24 VDC

Size: 165x58x165mm



Programmable digital amplifier

Programmable digital amplifier

Unique on the market with over 130 dBV in output signal (IMD3 -36 dB)

Autoprogrammable in 10 seconds

32 variable bandwidth UHF filters from 1 to 4 channels

OLED screen

Joystick & microSD configuration

SAE-912 Single Amplifier Sat/ Terr 40dB

Amplifier extension in installations with satellite signals

Gain and slope control

Using passive return of 5 to 35 MHz



Brand: Triax

Brand: Triax

Brand: Triax

Brand: Ikuzi

Ph 03 344 5417 Fax 03 344 5419

IKU350



Brand: Ikuzi Communities, housing estates Separate amplifications for Terrestrial and Satellite

March-23 www.digitalimports.co.nz



j.2 Commerical Amps



| Satellite Reception | Terrestrial Reception

IPTV

shes | Amplifiers | Receiv

eadends | A

Brand: Ikuzi

Brand: Ikuzi

Antenna

IKU3507

SAE-920 Dual Sat / Terr Amplifier 40dB



Dual amplier extension, Television + 2 X Satellite 45-862 MHz and 950-2.150 MHz

Extension amplifier in ICT installations or with dual cabled satellite signals


Separate amplifications for Terrestrial and Satellite

Gain and slope control

MESFET-GaAs technology in terrestrial amplification

IKU3576

Broadband amplifier 5 inputs, 2xUHF, BI/FM, BIII/DAB, SAT



- NBS 800 series high power broadband stations for terrestrial and satellite signal amplification in collective installations
- Interstage input attenuators
- Powered by switching power supply, in removable box
- Zamak housing with protective cover for adjustment potentiometers
- · Wall fixing and indoor mounting

IKU3593

Amplifier 1 input 2 outputs terrestrial/satellite 47-694 MHz



Ideal for extending the household network Mini size prepared for 2nd Dividend Using passive return Brand: Ikuzi

I.3 Masthead

167190

MFS 2 Way Mast Splitter - 5-2400mhz



Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax



2 way wideband 5...2400Mhz splitter w/ DC pass


UV resistant weather proof housing Easy mount:

- Opens w/ piston slide
- all F connectors on one side
- plastic strip for quick fasten at mast

Remarks: DC Pass Yes 25VDC /0.5A

340101

MFC 101 - Sat/TV Combiner



Waterproof housing & mast strap for mounting on Dish / Aerial mast

A great method to use the same RG6 cable for satellite & terrestrial

Saves time - great for situations where you are unable to run a new cable

Input 1 - through loss 3.0 dB Input 2 - through loss 2.0 dB

340651

MFA 651 1 Input - UHF - 5...12Vdc - Multiband mast amplifier



Low noise 1.8dB Gain 12dB Unique power stabliser enables use of 5-12VDC

2 terminal waterproof mast housing

F-Connector input and output

RF shielded and CE compliant EN50083

UPC 5702663406513

340911

March-23

MFA 611 - UHF / BIII - mast amplifier LTE700



F-connectors on all in- and outputs 4-terminal waterproof masthousing RF shielded & CE approved (EN 50083) Input 1 - channels 5... 12 / 21... 48

input 1 - Charmers 5... 12 / 21...46

Input 1 - frequency 170...230 / 470...694 MHz

DC Operating voltage

Gain 15-30 / 10-25

Size: 107 x 115 x 60mm

12...24 VDC

Remarks: LTE700





J.3 Masthead tellite Reception | Terrestrial Reception MFA 621 - UHF / BIII - mast amplifier - LTE700 **Brand:** Triax LTE protected F-connectors on all in and outputs 4-terminal waterproof masthousing RF shielded & CE approved (EN 50083) Input 1 - channels 5...12 / 21...48 170...230 / 470...694 MHz Input 1 - frequency 12...24 VDC DC Operating voltage Gain 5-15/20-35 Remarks: LTE700 **Size:** 60 x 117 x 115mm 370559 Wolsey 25Db Gain Mast Head Amp with Power Supply F-Connector Masthead Amplifier and Power Supply Kit **Brand:** Wolsey 1 Input 1 Output 10-25 dB Variable Gain Weatherproof housing Fully screened enclosure UPC 5702663705593 370564 LTE Outdoor 2 Way Splitter 1 Input 2 Outputs 47...790 MHz (UHF Only) **Brand:** Wolsey Input 1 - Loss <460 dB Power Pass on All Outputs DC Passthrough (12VDC / 400mA) F-Connectors Weatherproof Housing Fully Screened Enclosure UPC 5702663705647 370565 LTE 4 way outdoor splitter wolsey brand -1 Input 4 Outputs -- Loss <10 dB 47...790MHz (UHF Only) **Brand:** Wolsey Bi-Directional Through Line Power Power Pass on All Outputs (12VDC / 400mA) F-Connectors Pari No. 270005 Weatherproof Housing Fully Screened Enclosure UPC 5702663705654 370683 TFC FM/DAB/UHF Masthead Combiners with gold F Connectors **Brand:** Triax Input 1 - band FM 87.5-108 MHz Input 2 - band DAB 174-230 MHz Input 3 - band UHF 470-862 MHz DC Passthrough Yes (12VDC / 500mA) **Size:** 118mm x 140mm Remarks: Power Pass to UHF Input 37068 TFC FM/DAB/UHF/SAT Masthead combiner with gold F connectors **Brand:** Triax

Input 1 - band 87.5-108 MHz Input 2 - band DAB 174-230 MHz Input 3 - UHF 21-68 470-862 MHz Input 4 - band SAT 950-2150 MHz DC Passthrough Yes (12VDC / 500mA)

Size: 118mm x 140mm **Remarks:** Power Pass to SAT Input UPC 5702663706873

j.4 Attenuators

Triax F conn attenuator 3 dB

Attenuate your RF output by 3db **Brand:** Triax 4-1000 MHz







j.4 Attenuators | Amplifiers | Receivers Triax F conn attenuator 6dB Attenuate your RF output by 6db **Brand:** Triax 4-1000 MHz Triax F conn attenuator 10dB Attenuate your RF output by 10db **Brand:** Triax

Triax 20dB Antennuator

4-1000 MHz

Attenuate your RF output by 20db 4-1000 MHz

Brand: Triax

Brand: Triax

j.5 Filters/ Line Electronics

Triax Line Extender For amplifying a single line satellite distribution line in a Direct To Home (DTH) **Brand:** Triax installation.

100 dBµV Max output level Frequency range 47-2300 MHz 16...20 dB Gain

Commercial F termination - DC Blocked.

UPC 5702663004016 Size: 27mm x 82mm

TMM 75 ohm - F-male Terminator DC Blocked

700MHz TLP 048 LTE LP filter CH48- LTE700 4G Filter

700MHz LTE LP filter CH48 **Brand:** Triax

LTE Filters prevent 4G mobile services causing interference with terrestrial TV signals

Size: 85 x 25mm Remarks: LTE700 Inline UPC 5702663141766

TLP 148 LTE700 filter masthead CH48 314177

700MHz LTE LP filter CH48 (TLP 148) **Brand:** Triax

LTE Filters prevent 4G mobile services causing interference with terrestrial TV signals

Size: 55 x 110 x 112mm Remarks: LTE 700 **UPC** 5702663141773

314178 700MHz TLP 046 LTE LP filter CH46

700MHz LTE LP filter CH46 **Brand:** Triax

LTE Filters prevent 4G mobile services causing interference with terrestrial TV signals

Size: Loss 1.0db Remarks: DC pass through 30VCDC/1A UPC 5702663141780





J. Amplifier, Filters and Mast Electronics j.5 Filters/ Line Electronics

Remarks: Power Supply not Included



atellite Reception | Terrestrial Rec

| Dishes | Amplifiers | Receivers

| Antennas |

347001

Triax Power Injector 65V/2, 5A



Power Inserter - AC/DC 65V / 2A Passthrough 5 - 2400MHz Loss 5-862MHZ <0.5dB, 1000-2400MHZ <2dB **Brand:** Triax

Brand: Triax

370650

Triax Sat Slope Compensator Amp

Triax Satellite Signal Amplifier with independent control for slope & gain

Line power from the 18v feed of the receivers LNB input

950...2300 MHz Frequency range

12 dB Gain Slope control SAT 10 Attenuation 0...10 dB

Size: 37mm x 102mm Remarks: DC Passthrough (11...20VDC / 40mA)

Triax DC Block in line F



In line DC Blocker 5-2400 MHz

Brand: Triax

DTT Lightning Protector



Metal Housing for superior weather-proofing Galvanized lightning arrester Frequancy Range: 5 - 1000MHz

Insertion Loss: <2dB

Dielectric Strength: 1000VAC, 1min Insulation Resistance: >100 MO

SATLA

Satellite Lightning Protector



Metal Housing for superior weather-proofing 75 ohm F-Type Connectors Frequency Range: 120 - 2400MHz

Brand: Starview

Brand: Starview

J - Pg 7 March-23 Ph 03 344 5417 Fax 03 344 5419 www.digitalimports.co.nz



K. HDMI - IR - AV



| Satellite Reception | Terrestrial Reception

PTV | Dishes | Amplifiers | Rec

Head

Antennas

K. HDMI - IR - AV

HDMI-IR-AV

HDMI - IR - AV Category Index



K. HDMI - IR - AV k.1 HDMI Hardware k.2 IR Extension

Remarks: Page 1 of 10

k.1 HDMI Hardware

HDMI Hardware

HDMI Hardware Sub Category Index

K.1 HDMI Hardware

k.1.1 HDMI Matrices

k.1.2 HDMI Extenders

k.1.3 HDMI IP Extenders

k.1.4 HDMI Splitters

k.1.5 HDMI Converters

k.1.6 HDMI Accessories

Remarks: Pages 1 of 10

k.1.1 Matrices

HD4X4

HDMI Matrix - 4 HDMI to 4 HDMI

Easy to use: install in seconds.

Allows up to four HDMI audio/video devices to be independently switched to four

HDMI monitors, HDTVs, or projectors.

The four outputs can show the same or different sources simultaneously whether

the source is HDCP or not.

Each port supports HDMI or DVI inputs.

With extra infrared receiver extension.

Two switching modes: panel buttons, local IR.

HDCP compliant.

1080p support EDID, RS232port v1.4

HD4x4M

4x4 HDMi Matrix, Mirrored HDMI and HDBase T Outputs

• Allows 4 HDMI audio/video sources to be simultaneously distributed to up to 8 **Brand:** Helix

display devices

• Mirrored HDMI content over single CAT5e/6/7 cable up to 164ft/50m distance

• Supports High Definition resolutions up to 1080P@60Hz, and 1080P 3D@24Hz

• Supports up to 7.1 channels of High Definition audio (LPCM, Dolby TrueHD, and

DTS-HD Master Audio)

• Supports up to 16 different EDID configurations

• Supports unidirectional wideband IR control from display to source

• Flexible control through on-panel buttons, IR remote control, RS-232 or Ethernet

orotocol

HD4X4RM

Spare remote for HD4X4M Matrix

Extra remote control for Helix HD4X4M Matrix

Brand: Helix

Brand: Helix





k.1.1 Matrices



Satellite Reception	Terrestrial Reception IPTV Dishes Amp	olifiers Receivers	Headends Antennas
HD8x8M	HD BaseT 8x8 Matrix 150M 1080P 4K2K 120M		
WHERE ?	8 x HDMI inputs , 8 x HDMI & HDBaseT mirrored outputs HDMI 2.0b, HDCP 2.2 Up to 4K2K @60Hz with 24 bit RGB/YCBCR 4:4:4 HDR, HDR10, HDR10+, Dolby vision pass through Each output supports 4K to 1080p downscale independen Each output supports digital and analog audio de-embedd HDBaseT 1080P upt 150M and 4K2K upto 120M Advanced EDID managment Built in IR matrix 24V POC on all HDBaseT ports Front Pannell button, IR RS-232, TCP/IP and web GUI	= -	Brand: Helix
	Size: 440x374x88.6mm Remarks: 8x8 HDBaseT		
HDMX4x2	HDMI Matrix 4 in 2 out		
HDMI Batrix 432	Simple 4K Matrix Switch. Choose between four HDMI Inputs and Switch it to one of Comes with a Remote Control Power pack included Front pannel has indicator LED's, Manual In/out Selector E Switch		Brand: Helix
HDSS2-2	HDMI Switcher 2 in 2 out		
FORM SHIFTCHSPATTER 202 No	Watch One of Two HDMI Sources On One Or Two TV's 1080p, 4K Remote Included 1 Year Warranty		Brand: Helix
HDSS2-4	HDMI Switcher 2 in x 4 out		
FIGURESWITCHSPUTTER 2XA 35	Watch One of Two HDMI Sources On Up To Four TV's 1080p, 4K Remote Included 1 Year Warranty		Brand: Helix
HDSW3-A	HDMI 4K switcher 3 x 1 with audio amplifier		
Consider formation formations	All Digital Audio And Video Interface Switch Between: Optical, R/L, And x3 HDMI Inputs And: 2 Channel Speaker, Sub, R/L, Coaxial, Optical and x1 Remote Included 1080p, 4K, 3D Supports PiP and MHL Function	HDMI Outputs	Brand: Helix

k.1.2 Extenders



k.1.2 Extenders



Brand: Helix

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

HD122 Hdmi Splitter 1x2 with 2 CAT5e/6 Extenders 70M

1 HDMI Input to 2 Cat5E/6 Extenders with POC (power over cable)

- HDMI 1.4, HDCP 1.4 and DVI 1.0 compliant

- Support video resolution up to 4k2k@30Hz YUV 4:4:4

- The maximum transmission distance via a single CAT6/5e cable is as follows:

230ft/70m for 1080p, 131ft/40m for 4K30

- Support copying EDID from receiver display or loop out display
- Allow for cascading via additional HDMI loop out port

- Support one-way POC functionality (from transmitter to receiver)
- One-way IR signal transmission
- Compact design for easy and flexible installation

The goto product if your require HDMI distrubution to 4 points. Includes 8 receivers and 1 transmitter.

Helix making installation simple. Also available in 2 and 4 way kits

Remarks: Includes 8 x Receivers





k.1.2 Extenders



Brand: Helix

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

HD4K124

18Gbps HDMI 2.0 1x4 way Splitter 60M CAT,4K

HDMI extender to 4 CAT Receivers same as HD124 but 4K 60hz.

1. HDMI 2.0b, HDCP 2.2

- 2.18Gbps video bandwidth, up to 4K2K@50/60Hz 4:4:4
- 3. Support HDR, HDR10+, HLG and Dolby vision
- 4. Support up to 7.1CH HD audio pass-through
- 5. Support digital and analogue audio de-embedded output
- 6. Extend transmission distance up to 35m at 4K2K@60Hz, 50m at 4K2K@30Hz,

60m at 1080P@60Hz via a

single CAT6/6a/7 cable

- 7. Support 1 HDMI input, 1 HDMI loop output and 4/8 Cat outputs.
- 8. Support one-way IR control signal pass-through
- 9. Advanced EDID management
- 10. Support one-way PoC function

Complete Kit 4 Receivers and Transmitter

Remarks: Includes 4 Receivers

HD4KP2PARC

4K@60HZ HDBaseT Extender with ARC, RS232, CEC, POC

HD BaseT Extender.

- HDCP 2.2 / HDCP 1.x and DVI 1.0 compliant
- Support 18Gbps video bandwidth
- Video resolution is up to 4k2k@60Hz YUV 4:4:4
- Transmission distance via a single CAT6a/7 cable up to 230ft / 70m at1080P@60Hz; 164ft / 40m at 4K@60Hz 4:4:4
- Support ARC (Audio Return Channel) function
- With bi-directional IR, RS-232 and CEC pass-through
- HDR and Dolby Vision supported
- Support PoC (Power over Cable) function



Digital Audio Extender over Cat 5e/6 Cable

Extend optical and coaxial digital audio signals up to a distance of 300m (48kHz), 150m (96kHz) or 100m (192kHZ) over a single CAT cable

Optical and coaxial digital signal can be distributed at the same time

Built-in DAC (Digital to Analog Converter)

converts either optical or coaxial digital (selectable) to analog stereo left/right audio output (PCM only)

Support sample rates 32 kHz, 44.1 kHz, 48 kHz, 96 kHz and 192 kHz up to 24-bit resolution

Support LPCM, DTS, Dolby Digital and Dolby Digital Plus when used as a straight digital in/digital out extender

Support one-way POC function.

The transmitter is powered on by the receiver through the CAT cable.



HDBase T 4 K Extender over Cat5e/Cat6 (70/100m)

18Gbps HDMI Extender is a standard HDBaseT extender over Cat5e/Cat6,it compliant HDMI2.0 and HDCP2.2.It also supports Transfer Bidirectional Infrared control signal/RS232 signal/Ethernet together with the HDMI signal.

- HDMI 2.0b, HDCP 2.2 compliant
- Up to 4K2K@60Hz with 24bit RGB/YCBCR 4:4:4
- HDR (High Dynamic Range) pass through
- Supports all HDMI audio formats pass through
- POC (Power Over Cable) function is supported
- Two-way IR/RS232 control and Ethernet transmission
- Transmission distance: Over CAT6 cable

Remarks: 4K over Cat

Brand: Helix

Brand: Helix







k.1.2 Extenders



Brand: Helix

Brand: Helix

Terrestrial Reception 4K 60Hz HDMI extender over Coax Cable incl IR **HDCOAX2** HDMI 2.0 and HDCP 2.2 compliant **Brand:** Helix Support 18Gbps video bandwidth Support 4K2K @50/60Hz 4:4:4 Bi directional IR Support Audio embedding/ de-embedding Up to 5.1 channles audio supported, Dolby, DTS and PCM 4K Transmission up 100M via single RG6 0 0 3D, HDR, HDR10+, Dolby Vision, HLG supported Advanced EDID Wall mount option. **NEW PRODUCT JAN 2023** HDES01-IR-L HDMI Extender over Cat, 70M-IR - Loop Through & POE - HDMI 1.4, HDCP 1.4 and DVI 1.0 compliant **Brand:** Helix - Support video resolution up to 4k2k@30Hz YUV 4:4:4 - The maximum transmission distance via a single CAT6/5e cable is as follows: 230ft/70m for 1080p, 131ft/40m for 4K30 - Support copying EDID from receiver display or loop out display - Allow for cascading via additional HDMI loop out port - Support one-way POC functionality (from transmitter to receiver) - One-way IR signal transmission - Compact design for easy and flexible installation The goto product if your require a Point to Point HDMI over CAT cable. Also available in 2, 4 and 8 (HD122, HD124, HD128) output versions all with supplied receivers.

HDP2P4K

HDMI Point to Point 4K Extender with PoC

HDMI Extender 18GBPS over 50M single CAT6

Helix making installation simple.

HDMI 2.0

HDCP 2.2

7.1 CH

4K 60Hz

HDR

Loop through

k.1.3 IP Extenders

HDMI over IP Extender 150M with USB KVM

HDMI Extender over IP

- HDMI 1.4b, HDCP 1.4 compliant
- Up to 1920x1200@60Hz with 24bit RGB 4:4:4
- Adopt standard H.265 encoding/decoding
- Point-to-Point or one to many over standard 1G network switch
- Support standard 1G network switcher/router/hub
- Single Cat5e/6/6A cable up to 150m/492ft
- USB KVM supported
- One-way IR control from RX to TX
- Compact design for easy and flexible installation
- Complete Kit Sender & Receiver







K - Pg 5 Ph 03 344 5417 Fax 03 344 5419 March-23 www.digitalimports.co.nz





Brand: Helix

k.1.3 IP Extenders Terrestrial Reception | Dishes | Amplifiers | HDIP-CTL **HDMI over IP Control Box for (HDIPVW)** Controller for HDIPVW range **Brand:** Helix - MIPS 580MHz CPU, Linux OS - Built-in Web GUI for easily system setup and management - Intuitive 'drag & drop' source selection with video preview - Advanced signal management for AV, IR, RS-232 and USB routing - 2x 100M RJ45 LAN to bridge existing network to video over IP network - External devices control via IO with 5V, 12V level configurable - Easy to integrate with the 3rd party major control system brands - Control API via IR, RS-232 and TCP/IP - Security managements - POE (802.3af PD device) or local 12V power supply **HDIPVW-RX** HDMI 1080p@60HZ over IP w/Video-Wall (100M) with KVM ,IR IP Receiver with KVM and IR + Video Wall **Brand:** Helix - Standard H.265 Encoding/Decoding, 100M/1G managed network switch - HDMI 1.4b, HDCP 1.4 compliant - Up to 1080P60Hz(4:4:4) and 1920x1200@60hz - 1080P60Hz encoding and decoding - Support audio embedding and extracting - Support RS-232 - Seamless switching, Matrix and Video Wall - Encoder built-in H.264 stream for video preview - Standard POE supported (802.3af PD device) - Support Button, RS-232, TCP/IP, Web GUI - Security managements - Work with IP Controller box HDIP-CTL **HDIPVW-TX** HDMI 1080p@60HZ over IP w/Video-Wall (100M) with KVM ,IR - Standard H.265 Encoding/Decoding, 100M/1G managed network switch **Brand:** Helix - HDMI 1.4b, HDCP 1.4 compliant - Up to 1080P60Hz(4:4:4) and 1920x1200@60hz - 1080P60Hz encoding and decoding - Support audio embedding and extracting - Support RS-232 - Seamless switching, Matrix and Video Wall - Encoder built-in H.264 stream for video preview - Standard POE supported (802.3af PD device) - Support Button, RS-232, TCP/IP, Web GUI - Security managements

k.1.4 Splitters

HDMI 1 x 8 Splitter

Support HDMI 1.4b

Support 3D video format

Resolution up to 3840x2160/30Hz

- Work with IP Controller box HDIP-CTL

Support 3.2Gbps data rate for TMDS clock up to 320MHz

Support deep color 8/10/12bit

 $support\ AWG26\ HDMI\ standard\ cable:$

when the resolution is 1080p and below, input up to 15 metres, output up to 25 metres.

when the resolution is 4K, input up to 12 metres, output up to 15 metres.

Support displaying single source, multi-output high-definition signal source from

DVD player A/V receiver, set-top box

DC 12V/5A power supply



k.1.4 Splitters



Terrestrial Reception

HD421-4K

4x1 HDMI 4 in to 1 out 4K with Audio Extractor

The HDMI 18Gbps 4x1 Switcher can switch any of 4 HDMI 2.0 sources to an HDMI 2.0 display. It supports 10bits HDR (High Dynamic Range) pass through and HDMI high resolution digital audio bypass as well as HDCP and CEC bypass. It can also extract HDMI audio to L/R analog output (LPCM only)



- Up to 4K2K@60Hz with 24bit RGB/YCBCR 4:4:4
- 4x1 HDMI switch with EQ and Re-clocking
- · Auto and manual switching mode
- Extracts HDMI audio to L/R analog output (LPCM only)
- Supports all HDMI audio formats pass-through
- HDR, Dolby Vision pass through

Remarks: 4K@60Hz, HDMI2.0b, HDCP 2.2

HD421-4KA

4x1 HDMI 4 in to 1 out 4K Switch with ARC

The 4 by 1 HDMI switcher allows four HDMI sources to be routed to a HDMI display, it also de-embeds the audio signal from HDMI stream and outputs to optical (S/PDIF) digital audio and analog stereo audio signal. ARC function supports



- Up to 4K2K@60Hz with 24bit RGB/YCBCR 4:4:4
- 4x1 HDMI switch with EQ and Re-clocking
- · Auto and manual switching mode
- Extracts HDMI audio to digital and L/R analog output
- Supports all HDMI audio formats pass-through
- HDR, Dolby Vision pass through
- Support smart EDID management(Auto/2CH/5.1CH/7.1CH selectable)
- Audio Return Channel (ARC) supported

Remarks: 4K@60Hz - HDCP2.2 - ARC

HD4x1QV

HDMI 4×1 Quad Multi-Viewer

• HDMI 1.4, HDCP 1.4 compliant

• Input resolution can automate recognition.

(480i~1080P60,800x600~1920x1080)

• Output resolution can be selected by on-panel button and remote control, the maximum up to 1080P@60Hz (1920x1080P@60Hz, 1280x720P@60Hz)

- Audio supports LPCM 2CH
- Supports 1/2/4 windows multi-view modes
- Control is via on-panel button and remote control

Remarks: Switcher with Multi View

HD52'

18Gbps 5x1 HDMI Switcher

5 HDMI Input to 1 HDMI output

-HDMI 2.0 HDCP 2.2/1.x and DVI 1.0 compliant

- Support 18Gbps video bandwidth

- HDR, HDR10, Dolby Vision and HLG are supported
- Support video resolution up to 4K2K@50/60Hz YCbCr 4:4:4 Support 3D video format
- Low power consumption
- Support IR remote control and panel button control Compact design for easy and flexible installation

Remarks: Video Wall



March-23

Mini HDMI Splitter 1x2 Usb Powered

USB Powered 2 way HDMI Splitter, 4K, 1080p Compatible



Brand: Helix

Brand: Helix

Brand: Helix

Brand: Helix

Brand: Helix

K - Pg 7 Ph 03 344 5417 Fax 03 344 5419



k.1.4 Splitters



| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

HDSP2

HDMI 2 Way Splitter



Watch One HDMI Source On Two TV's 1080p, 3D 1 Year Warranty

Brand: Helix

HDSP4

HDMI 4 Way Splitter

Watch One HDMI Source On Up To Four TV's

- -. HDMI 2.0b, HDCP 2.2 compliant
- -. Support 18G Up to 4K2K@60Hz with 24bit RGB/YCBCR 4:4:4
- -. VESA format up to QSXGA@60Hz
- -. HDR, Dolby Vision pass through
- -. Support LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio 6. Built-in Equalizer, Retiming and Driver
- -. Smart EDID, AUTO(compare) mode and TV(copy OUT1) mode

MOMI SPLITTER
1 x4

WITHARD

k.1.5 Converters

HD4KTOS

HDMI to Toslink (R/L) Adaptor 4K



- *HDMI 2.0b, HDCP 2.2 compliant
- *Up to 4K2K@60Hz with 24bit RGB/YCBCR 4:4:4
- *HDR, HDR10, HDR10+, Dolby Vision pass through
- *Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio *Digital and analog audio de-embedded
- *Built-in Equalizer, Retiming and Driver
- *EDID management
- * Toslink Out, and 3.5mm L/R Audio out (Cable not included)
- *Compact design for an easy and flexible installation

HD4KTOSDTS


18G HDMI Audio extractor with dolby DTS downmix



- -HDMI 2.0b (18Gbps), 4K2K@50/60Hz (YUV444)
- Extract HDMI audio to multi-channel optical (SPDIF) or L/R analog audio HDMI Pass-through audio input to HDMI and optical audio output
- Support bitstream audio down-mix to L/R analogoutput
- Optical audio supports LPCM 2CH, Dobly Digital 2/5.1CH, DTS 2/5.1CH Support HDMI High Bit Rate (HBR) audio pass through
- Audio sample rates up to 96kHz
- 10bits HDR (High Dynamic Range) pass through
- Support CEC pass-through



Analogue to Digital Audio Converter



Fibre, and Coaxial cables can run up to 5 metres from the device while still providing a reliable and lossless audio signal. This gadget is both compact and easy to install, making it incredibly useful for the home or office. Supports uncompressed 2-channel LPCM (Linear Pulse Code Modulation) digital audio signal output.

Has an output sampling rate of 48 KHz.

Provides electromagnetic-noise-free transmission.

Easy to install and operate.



HDMI ARC - Audio Return Channel Adaptor

ARC Audio Return Adaptor extracts the audio from the HDMI into an optical output. Supports all major Audio Video Formats

Brand: Helix



Brand: Helix

Brand: Helix

Brand: Helix

Brand: Helix



k.1.5 Converters



Brand: Helix

Brand: Helix

Brand: Helix

Brand: Helix

Brand: OEM

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

HDARC2

rerreseriar reception

HDMI ARC Audio Extractor



- ARC Enabled: Extract audio signal from ARC

- (Audio Return Channel) enabled HDTV to analog stereo output, for audio receiver/amplifier/headphone applications

- Support PCM audio to 2 channel stereo audio output
- Support CEC function (TV remote can control the volume)

HDARC4K

18Gbps 4K HDMI eARC Extractor

eARC Extractor

- HDMI 2.0b, HDCP 2.3 compliant;
- Up to 4K2K@60Hz with 24bit RGB/YCBCR 4:4:4;
- VESA format up to QSXGA@60Hz;
- HDR, HDR10, HDR10+, Dolby Vision pass through;
- Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio; Built-in Equalizer, Retiming and Driver;
- EDID management;
- Dedicated HDMI out for audio only with 720p black screen;
- Support eARC/ARC audio extract to HDMI audio port out;
- Support CEC;



HDMI ARC Audio Down-mixer

ARC Audio Sown-Mixer

- Dolby, DTS licensed
- Input: HDMI x 1;
- Output: 3.5mm L/R x1, RCA x 2
- ARC Enabled: Extract audio signal from ARC, (Audio Return Channel) enabled HDTV to analogue stereo output, for audio receiver/amplifier/headphone applications
- Support PCM 2.0, Dolby 5.1, DTS 5.1 audio
- downmix to 2 channel stereo audio output
- Support CEC function (TV remote can control the volume)



Digital to Analogue Audio Converter

Converts Digital optical Audio down to Analogue





k.1.6 Accessories

HDMICECMF

HDMI CEC Blocking Female/ Male Adapter

Blocks CEC commands from device to TV and vice versa



HDPROT

March-23

HDMI Protector

HDMI Protection. -ESD Protection

- -5V protection
- -Spark protection

Brand: Helix





k.1.6 Accessories



| Satellite Reception | Terrestrial Reception

IPTV | Dishes | Amplifiers | Receivers

HDREP

18G HDMI 2.0 Repeater

HDMI Repeater

- HDMI 2.0b, HDCP 2.2 . Support 18Gbps,
- Support HLG, HDR 10, HDR 10+ and dolbyvision
- Built-in TMDS equalization and CDR (Clock Rate Recovery) for extending HDMI cable distance
- Distance up to 8m at the resolution of 4K2K@50/60Hz(YUV_444), 15m at
- 4K2K@60Hz(YUV_420) and 20m at 1080p@60Hz
- Require the HDMI source device to output power to the unit via an HDMI cable
- Simple plug and play

k.2 IR Extension

IRXE

Starview Wired Remote Extender

IR Extender - Over Coax

Sends IR controls down an existing coax cable, Kit contains 1 Receiver & 1

Transmitter

Works with My Sky

IR freq 35-41kHZ

IR Receiving range >=5M

Carrier Freq 11MHZ -ASK

Control adjust 0-10dBuV

Power Supply included 12VDC

Will work through Splitters, Diplexers, and between legs of a Multi Switch

IRXF-T

Extra transmitter for IRXF



IRXF Extra Transmitter Single Pack - 1 Transmitter **Brand:** Starview

Brand: Helix

Brand: Starview

Ph 03 344 5417 Fax 03 344 5419 K - Pg 10



L. Cables
L. Cables



| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

L. Cables

CABLE

Cable Category Index



L. Cables

I.1 Coax

I.2 Data

I.3 HDMI

I.4 AV - Composite

I.5 Cable - Wire

Remarks: Page 1 of 7

I.1 Coax

151613

Triax RG6 Coax Cable PE Koka 110 A+ Black 100m Drum



A triple shielded class A+ coaxial cable, which delivers high quality transportation of TV/Video signal with low LTE interference. This cable is the right choice if you require a clear TV-picture without pixilation.

Class A+ (EN 50117-2-4) & PE cable (EN 50117-2-5)

High quality materials means long durability

High performance even over long distances

LTE protected – tinned copper braid & two layered foils protect signals

Triax RG6 Coax Cable PE Koka 110 A+ Black 250m Drum

PE jacket is ideal for outdoor installations.

Size: Coax 6.8mm

Size: Coax 6.8mm Remarks: 100M Roll - INDENT



A triple shielded class A+ coaxial cable, which delivers high quality transportation of TV/Video signal with low LTE interference. This cable is the right choice if you

require a clear TV-picture without pixilation. Class A+ (EN 50117-2-4) & PE cable (EN 50117-2-5)

High quality materials means long durability

High performance even over long distances

LTE protected – tinned copper braid & two layered foils protect signals

PE jacket is ideal for outdoor installations.

Size: Coax 6.9mm Remarks: 250M Roll - INDENT

151616

151614

Triax KOKA 110 A+ Class - LSZH White 100m Reel -



A triple shielded class A+ coaxial cable, which delivers high quality transportation of TV/Video signal with low LTE interference. This cable is the right choice if you

require a clear TV-picture without pixilation.

Class A+ (EN 50117-2-4) & PE cable (EN 50117-2-5)

High quality materials means long durability

High performance even over long distances

LTE protected – tinned copper braid & two layered foils protect signals

LSZH (Low Smoke Zero Halogen) jacket is ideal where fire resistance is a

requirement.

Size: Coax 6.8mm Remarks: 100m Roll

151620

KOKA 110 A+ PVC White 250m Pull Box



A triple shielded class A+ coaxial cable, Supplied in a convenient Pully box which delivers high quality transportation of TV/Video signal with low LTE interference. This cable is the right choice if you require a clear TV-picture without pixelation.

Class A+ (EN 50117-2-4) & PE cable (EN 50117-2-5)

High quality materials means long durability

High performance even over long distances

LTE protected – tinned copper braid & two layered foils protect signals

305309-5PK

March-23

TMM LK - Connecting leads - 25,5 cm

TMM LK - Connecting leads

Size: 255mm

2 x F-male Quick connectors, length 25,5 cm, 5 colors. 5 pcs. in each bag.

54

Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax







Brand: Triax

Brand: OEM

| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

Remarks: 250M Roll

370766

Triax RG6 Coax Cable CCS PVC Black 250m Drum

*

RG6/ U - PVC black, 250m reel, Coax Cable Dielectric - dimension 4.6 mm Dielectric - material PE foamed

Jacket - dimension

Size: Coax 7mm

Rated according to CPR EN50575 Fire standard Fca **Size:** Coax 7mm **Remarks:** 250M Roll

370768

Triax RG6 Coax Cable CCS PVC White 250m Drum

6.50 mm



RG6/ U - PVC White, 250m reel, Coax Cable

Dielectric - dimension

4.6 mm

Brand: Triax

Dielectric - material PE foamed
Jacket - dimension 6.50 mm
Rated according to CPR EN50575 Fire standard Fca

CAB1

1M RG6 Hookup Cable F to F



1m F Type F / F Cable Brand: Helix

CAB10

10M RG6 Camper Hookup Cable F to F



10m F Type F / F Cable Brand: Helix

Size: 10m

CAB2

2M RG6 Hookup Cable F to F



2M F Type F / F Cable Brand: Helix

Size: 2 Meter

CAB500

500mm RG6 Hookup Cable F to F



500mm F Type F / F Cable Brand: Helix

Size: 500mm

I.2 Data

C-U3.1CA-0.2

USB 3.1 USB-C Male To USB-A Male Cable 0.2m - works with EoC



USB A - to USBC Cable, 0.2M Works with EoC Media Converters.

 Size:
 0.2 M
 Remarks:
 USB A to USB C
 UPC 3967592414028

C-U3.1CA-1

USB 3.1 USB-C Male To USB-A Male Cable 1m - works with EoC



USB A - to USBC Cable - 1M Brand: OEM Works with EoC Media Converters.



L. Cables
1.2 Data



| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

C6A-10-Bk

10m Cat6 Black UTP Patch Lead



10m Cat6 Black UTP Patch Lead Brand: OEM

C6A-12-Bk

12.5m Cat6 Black UTP Patch Lead



12.5m Cat6 Black UTP Patch Lead **Brand:** OEM

C6A-20-Bk

20m Cat6 Black UTP Patch Lead



20m Cat6 Black UTP Patch Lead Brand: OEM

C6A-5-Bk

5m Cat6 Black UTP Patch Lead



5m Cat6 Black UTP Patch Lead Brand: OEM

C6A-7-Bk

7m Cat6 Black UTP Patch Lead



7m Cat6 Black UTP Patch Lead Brand: OEM

C6A-PP-Bk

0.3m Cat6 Black UTP Patch Lead



0.3m Cat6 Black UTP Patch Lead Brand: OEM

I.3 HDMI

370715

1.5m High Speed HDMI Cable



1.5m High Speed HDMI cable with Ethernet
Professional grade, high quality HDMI cable for a perfect high definition reception
HDMI Ethernet Channel

Audio Return Channel

24K Gold Plated Connectors,3D

4K Resolution Support

Inner conductor - dimension 28 AWG mm

UPC 5702663707153

Brand: Triax



L. Cables I.3 HDMI ellite Reception | Terrestrial Reception | | Dishes | Amplifiers | Receivers 2.0m High Speed HDMI Cable 2m High Speed HDMI cable with Ethernet **Brand:** Triax Professional grade, high quality HDMI cable for a perfect high definition reception **HDMI Ethernet Channel** Audio Return Channel 24K Gold Plated Connectors,3D 4K Resolution Support Inner conductor - dimension 28 AWG mm **UPC** 5702663707160 370717 3.0m High Speed HDMI Cable 3m High Speed HDMI cable with Ethernet **Brand:** Triax Professional grade, high quality HDMI cable for a perfect high definition reception **HDMI Ethernet Channel** Audio Return Channel 24K Gold Plated Connectors.3D **4K Resolution Support** Inner conductor - dimension 28 AWG mm **UPC**5702663707177 5.0m High Speed HDMI Cable 2m High Speed HDMI cable with Ethernet **Brand:** Triax Professional grade, high quality HDMI cable for a perfect high definition reception **HDMI Ethernet Channel** Audio Return Channel 24K Gold Plated Connectors,3D 4K Resolution Support Inner conductor - dimension 26 AWG mm UPC 5702663707184 10m HDMI Cable 10m Standard Speed HDMI cable with Ethernet **Brand:** Triax Professional grade, high quality HDMI cable for a perfect high definition reception **HDMI Ethernet Channel** Audio Return Channel 24K Gold Plated Connectors, 3D Compact EMI Interface Suppressed Inner conductor - dimension 26 AWG mm 15m HDMI Cable 15m Standard Speed HDMI cable with Ethernet **Brand:** Triax Professional grade, high quality HDMI cable for a perfect high definition reception **HDMI Ethernet Channel** Audio Return Channel 24K Gold Plated Connectors, 3D Compact EMI Interface Suppressed Inner conductor - dimension 24 AWG mm 20m HDMI Cable 20m Standard Speed HDMI cable with Ethernet **Brand:** Triax Professional grade, high quality HDMI cable for a perfect high definition reception **HDMI Ethernet Channel** Audio Return Channel 24K Gold Plated Connectors, 3D

Compact EMI Interface Suppressed

Inner conductor - dimension 24 AWG mm

1m HDMI Cable With Ethernet

High Speed HDMI Cable With Ethernet



UPC 5702663707221

Brand: Wolsey

L - Pg 4 Ph 03 344 5417 Fax 03 344 5419 March-23 www.digitalimports.co.nz







| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

370723

2m HDMI Cable With Ethernet

201 P

High Speed HDMI Cable With Ethernet Brand: Wolsey

370724

3m HDMI Cable With Ethernet



High Speed HDMI Cable With Ethernet Brand: Wolsey

UPC 5702663707245

370725

5m HDMI Cable With Ethernet



High Speed HDMI Cable With Ethernet Brand: Wolsey

UPC5702663707252

3/0/26

10m HDMI Cable With Ethernet



High Speed HDMI Cable With Ethernet Brand: Wolsey

UPC 5702663707269

AHDMI

HDMI Angle Adaptor

Ideal For Wall Mounting TV's



HDMI Female to HDMI Male Right Angle Connector Brand: Starview

HDMI1000 1m HDMI Cable



Starview High Speed HDMI Cable with ethernet 1M long
Gold plated plus with ferrites for improved performance and reduced interference

HDMI1000BX10

HDMI 1M cables with ferrites - Box of 10



Contractor box of 10 HDMI1000 hook up cables,
With ferrites great for HD124 and HDMI extender kits and device connection

Starview High Speed HDMI Cable with ethernet 1M long
Gold plated plus with ferrites for improved performance and reduced interference

Size: 1M Remarks: Box of 10

HDMI600 0.6m HDMI Cable Hook up



0.6m Performance HDMI Cable with ethernet Brand: Helix With Ferrites for EMF protection and gold plated plugs

Helix High Speed HDMI Cable with ethernet 1M long

Size: 600mm Remarks: Box of 10

Great HDMI Patch Cable







IDMI600BX10

HDMI Hook up cables with ferrites - Box of 10



Contractor box of 10 HDMI600 hook up cables, With ferrites great for HD124 and HDMI extender kits Helix High Speed HDMI Cables with ethernet 600mm long Gold plated plus with ferrites for improved performance and reduced interference

Size: 600mm

I.4 AV - Composite

AOP1

Optical Audio Cable



Standard TOS Link Cable. High Quality Cable.

Brand: Starview

Brand: Helix

Size: 1.5M

Optical Audio Cable Type 2



High Quaility TOS Link Cable. Standard TOS Link to 3.5mm Toslink Plug. Suitable for Apple Air Port

Brand: Starview

Size: 1.5M

5m RCA Audio Cable 2 RCA To 2 RCA



5m RCA Audio Cable 2 RCA to 2 RCA Plugs, **Brand: OEM** Coloured Red & White

Size: 5M

UPC 7666233428726



Stereo 3.5mm Male To 2 RCA Female Cable



200mm Stereo 3.5mm Male To 2 RCA Female Cable **Brand: OEM**

Size: 200mm

UPC 3967325827408



0.15m Dual RCA Female To RCA Male Cable



0.15m Dual RCA Female to RCA Male Cable **Brand: OEM**

Size: 150mm

UPC 3967325986082



3x RCA to 3x RCA Joiner



Standard 3 RCA to 3 RCA Joiner **Brand: Starview** Black / Yellow depending on stocks

CAV1020

1.5m Component Cable



Component Cable - Standard Duty **Brand: Starview**

Size: 1.5M

L - Pg 6 March-23 Ph 03 344 5417 Fax 03 344 5419 www.digitalimports.co.nz



L. Cables 1.4 AV - Composite



| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

CAV1030

High Grade 1.5m Component Cable



High Quality Component Cable

Metal Plugs

Brand: Starview

Size: 1.5M

CFQ1

1.5m F Type Quick Connection Cable



Quick Connect Lead. Brand: Starview Great for Fly Leads from TV to Wall Plate. Portable Satellite Dishes.

Size: 1.5M

EDATCH

16cm F Type Quick Connection Cable

Angled Quick Connectors -F Type



Commerical Quick Patch Lead- Short. Brand: Triax

SCARTA

SCART to RCA Adaptor



Standard Scart to 3 RCA Adaptor with Switch (In/Out)

Brand: OEM

I.5 Cable/Wire

CW2.5G

Green 2.5mm Conduit Wire - Earth



Green Conduit wire for Earthing MATV Systems - Sold Per M



M. Fibre



Satellite Reception | Terrestrial Reception | Amplifiers | Receivers

M. Fibre

Fibre Optics Category Index

M. Fibre

m.1 Transmitters

m.2 Receivers

m.3 Taps / Splitters

m.3.1 FC/PC Products

m.3.2 SC/APC Products

m.4 Connectors / Attenuators

m.5 Fibre Cables / Patch Leeds

m.5.1 FC/PC Products

m.5.2 SC/APC Products

m.7 Enclosures

Remarks: Page 1 of 4 m.1 Transmitters

TMDS 1230 PSU 20v 3.3Amp PSU for use with TOST + TOCT

Providing up to 3.0A of current even large cascadable systems can be powered from one PSU unit

Used for TOST 307790 and TOCT 307791

UPC 5702663073722

Brand: Triax

Brand: Triax

Brand: Triax

TOST Optical Sat Transmitter

ntegrated services on a single fibre

SAT-IF distribution over fibre optics (FO) can supply many households over larger

Almost lossless transmission of satellite, DVB-T and DAB signals. Attenuation per

Future-proof and widest possible variety of channels.

Space-saving installation - a 3 mm optical fibre replaces five 7 mm coaxial cables.

UPC 5702663077904

TOCT Optical Combined Transmitter

Integrated services on a single fibre

SAT-IF distribution over fibre optics (FO) can supply many households over larger distances, with feed from a central satellite dish station.

Almost lossless transmission of satellite, DVB-T and DAB signals. Attenuation per 1000 m only about 0.3 dB.

Future-proof and widest possible variety of channels.

Space-saving installation - a 3 mm optical fibre replaces five 7 mm coaxial cables.

UPC 5702663077911

Brand: Triax

m.2 Receivers

TWOC Wideband OPTO converter

Integrated services on a Single fibre

SAT IF distribution over fibre optics (FO) can supply many households over larger distances, with feed from a central satellite dish station.

Almost lossless transmission of satellite, DVB-T and DAB signals. Attenuation per 1000 m only about 0.3 dB.

Future-proof and widest possible variety of channels.

Vertical and Horizontal Wideband IF signals are transmitted over one optical fibre using a Wideband LNB.

Space-saving installation - a 3 mm optical fibre replaces five 7 mm coaxial cables.

The TWOC has 2 Wideband outputs, Vertical and Horizontal.

distances, with feed from a central satellite dish station.

1000 m only about 0.3 dB.

307791

307773

TRIAX (DC





m.2 Receivers



Amplifiers 307774 TWCT Wideband OPTO converter +TER Integrated services on a Single fibre **Brand:** Triax SAT IF distribution over fibre optics (FO) can supply many households over larger distances, with feed from a central satellite dish station. TRIAX Almost lossless transmission of satellite, DVB-T and DAB signals. Attenuation per 1000 m only about 0.3 dB. Future-proof and widest possible variety of channels. TWCT Art. no.: 307774 Vertical and Horizontal Wideband IF signals are transmitted over one optical fibre Optical input | 1310 - 1330 - 1550 nm RF output | 5 - 2400 MHz using a Wideband LNB. Space-saving installation - a 3 mm optical fibre replaces five 7 mm coaxial cables. CE Product of TE The TWCT has 2 Wideband outputs, Vertical and Horizontal and a separate

m.3.1 FC/PC Product

307635

Triax TOS04D 4 way optical splitter



Triax fibre optical TOS 04 - 4 way passive splitter / coupler units build passive **Brand:** Triax optical networks (PON) in virtually any size and split ratio.

Using combinations of the 2,3,4 & 8 Way optical splitters All 1310/1550 nm

Complete with FC/PC Connections.

Size: 100 x 100 x 25mm Remarks: Insertion loss 6.9dBm

307636

Triax TOS02D 2 way Optical Splitter



Triax fibre optical TOS 02 - 2 way passive splitter / coupler units build passive **Brand:** Triax

optical networks (PON) in virtually any size and split ratio. Using combinations of the 2,3,4 & 8 Way optical splitters

All 1310/1550 nm

Terrestrial output

End of Line:

End of Line: 🚺

Complete with FC/PC Connections.

Size: 150x114x20mm Remarks: Insertion loss 3.6dBm

307731

Triax Fibre TOS02D- 2080 Optical Tap



Triax fibre optical TOS passive coupler units build passive optical networks (PON) **Brand:** Triax

in virtually any size and split ratio. Coupler/Split Ratio: 20/80%

All 1310/1550 nm

End of Line:

Complete with FC/PC Connections Remarks: Through/Tap Loss 1.5/7.6dBm

Triax TOS02D-3070 Optical Tap



Triax fibre optical TOS passive coupler units build passive optical networks (PON) **Brand:** Triax

in virtually any size and split ratio. Coupler/Split Ratio: 30/70%

All 1310/1550 nm

End of Line:


Brand: Triax

End of Line: V

Complete with FC/PC Connections. Remarks: Through/Tap Loss 2.1/5.8dBm

307734

TOS 16F, 16-way FC/PC



The balanced coupler is implemented in a valid metal housing

pre-assembled with FC/PC connectors

PLC (Planar Lightwave Circuit) couplers with a wide window of wave lengths

Low and flat insertion loss

Insertion loss (typ.) Size: 175x50x155 mm 13.6 dB **Remarks:** Opti<u>cal - FC/PC 13.6 dB</u>

307735

TOS 32F, 32-way FC/PC



The balanced coupler is implemented in a valid metal housing

pre-assembled with FC/PC connectors

PLC (Planar Lightwave Circuit) couplers with a wide window of wave lengths

Low and flat insertion loss

Insertion loss (typ.) Size: 175x50x155 mm 16.7 dB **Remarks:** FC/PC 16.7dB **Brand:** Triax

End of Line: 📝



m.3.2 SC/APC Products



tellite Reception | Terrestrial Reception

m.3.2 SC/APC Products

TOS 02 SC 2 Way PLC Splitter (SC/APC)



The optical splitter uses a planar light wave circuit (PLC) based on silica optical waveguide technology. It features small size, high reliability, wide operating wavelength range and good channel-to-channel uniformity.

The splitter circuit is packaged in a plastic cassette and are terminated with SC/APC connectors. The cassette can be mounted:

- on the wall
- in 19" 3HU rack
- in TRIAX Fibre Distribution Cabinet TOS-Cab16 (307910) or TOS-Cab32 (307911)

Size: 130x113x25 mm Remarks: 3.7dBm Loss

TOS 03 SC 3 Way PLC Splitter (SC/APC)



The optical splitter uses a planar light wave circuit (PLC) based on silica optical waveguide technology. It features small size, high reliability, wide operating wavelength range and good channel-to-channel uniformity.

The splitter circuit is packaged in a plastic cassette and are terminated with SC/APC connectors. The cassette can be mounted:

- on the wall
- in 19" 3HU rack
- in TRIAX Fibre Distribution Cabinet TOS-Cab16 (307910) or TOS-Cab32 (307911)

Size: 130x113x25 mm Remarks: 5.6 dBm Loss

307904

TOS 04 SC 4 Way PLC Splitter (SC/APC)



The optical splitter uses a planar light wave circuit (PLC) based on silica optical waveguide technology. It features small size, high reliability, wide operating wavelength range and good channel-to-channel uniformity.

The splitter circuit is packaged in a plastic cassette and are terminated with SC/APC connectors. The cassette can be mounted:

- on the wall
- in 19" 3HU rack
- in TRIAX Fibre Distribution Cabinet TOS-Cab16 (307910) or TOS-Cab32 (307911)

Size: 130x113x25 mm Remarks: 6.6 dBm Loss

307905

TOS 08 SC 8 Way PLC Splitter (SC/APC)



The optical splitter uses a planar light wave circuit (PLC) based on silica optical waveguide technology. It features small size, high reliability, wide operating wavelength range and good channel-to-channel uniformity.

The splitter circuit is packaged in a plastic cassette and are terminated with SC/APC connectors. The cassette can be mounted:

- on the wall
- in 19" 3HU rack
- Fibre Distribution Cabinet TOS-Cab16 (307910) or TOS-Cab32 (307911)

Size: 130x113x25 mm Remarks: 9.6 dBm Loss

TOS 16 SC 16 Way PLC Splitter (SC/APC)



The optical splitter uses a planar light wave circuit (PLC) based on silica optical waveguide technology. It features small size, high reliability, wide operating wavelength range and good channel-to-channel uniformity.

The splitter circuit is packaged in a plastic cassette and are terminated with SC/APC connectors. The cassette can be mounted:

M

- on the wall
- in 19" 3HU rack
- in Fibre Distribution Cabinet TOS-Cab16 (307910) or TOS-Cab32 (307911)

Size: 130x113x52 mm Remarks: 13.0 dBm Loss **Brand:** Triax

Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax

Ph 03 344 5417 Fax 03 344 5419

M - Pg 3



DATE AND A SALE

M. Fibre Optics

m.3.2 SC/APC Products



tellite Reception | Terrestrial Reception Amplifiers | Receiver

307907

TOS 32 SC 32 Way PLC Splitter (SC/APC)

The optical splitter uses a planar light wave circuit (PLC) based on silica optical waveguide technology.

It features small size, high reliability, wide operating wavelength range and good channel-to-channel uniformity.

The splitter circuit is packaged in a plastic cassette and are terminated with SC/APC connectors.


The cassette can be mounted in a 19" 3HU rack

Size: 130x113x102 mm Remarks: 16 dBm Loss

m.4 Connectors / Attenuators


307001

TFA 03 SC/APC - opt. att 3dB






TFA 05 SC/APC - opt.att 5dB




307003

TFA 10 SC/APC - opt.att 10dB



307684

Triax Barrel Adaptor for FC/PC-FC/PC



Remarks: FC/PC

307686

Triax Barrel Adaptor for FC/PC-SC/PC

TFB 002 - Barrel adaptor - FC/PC - SC/PC Triax fibre optic accessories- for building optical networks **Brand:** Triax

Brand: Triax

30768

TFA005, 05 dBm Optical Attenuators

TFA 005 - Optical attenuator. 5 dBm optical attenuator, FC/PC-FC/PC





Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax



m.4 Connectors / Attenuators



TFA010, 10 dBm Optical Attenuators TFA 010 - Optical attenuator. 10 dBm optical attenuator, FC/PC-FC/PC **Brand:** Triax

307692

TFA015, 15 dBm Optical Attenuator

TFA 015 - Optical attenuator. 15 dBm optical attenuator, FC/PC-FC/PC **Brand:** Triax

FC/PC Adaptor to SC/APC - Quick Connect

Fibre Adaptor. Handy to carry in your kit. Connects from FC/PC to SC/APC. **Brand: OEM**

m.5 Fibre Cables/ Patch Leads

FC/PC to FC/PC Yellow 1.5M Patch Leed Optical patch cable - FC/PC - FC/PC - singlemode 1.5 metre **Brand: OEM**

Pre-connected cables for easy installation, for singlemode use, LSZH yellow

LC-FC-UPC **LC-FC UPC Single Mode 1m Patch Lead** LC-FC UPC Simplex Single Mode Fibre Patch Lead 2.0mm PVC(OFNR) **Brand: OEM**

m.5.1 FC/PC Range

307581 Triax FC/PC Pigtail Cable 1mtr FC/PC Pigtail cable. **Brand:** Triax

Triax armored fibre optical patchcord - for building optical networks. diameter \tilde{A}^{\sim} : 3 mm. Cable length 1 meter.

Size: 1M

Optical patch cable - FC/PC - SC/APC

Optical patch cable - FC/PC - SC/APC - singlemode **Brand:** Triax

Pre-connected cables for easy installation, for singlemode use, LSZH grey

Size: 2M Remarks: FC/PC - SC/APC

Triax Optical Cable 1mtr

TFC 01 - Steel armored 1 metre single mode fibre optic cable - G657A, 9/125 μm. **Brand:** Triax Pre-connected FC/PC cables for easy installation.

Low attenuation of 0.3 dB per km

UV-resistant LSZH

Steel-reinforced jacket for protection and tension

Size: 1M Remarks: Conectors FC/PC



m.5.1 FC/PC Range



ellite Reception | Terrestrial Reception **Triax Optical Cable 3mtr** TFC 03 - Steel armored 3 metre single mode fibre optic cable - G657A, 9/125 µm. **Brand:** Triax Pre-connected FC/PC cables for easy installation. Low attenuation of 0.3 dB per km **UV-resistant LSZH** Steel-reinforced jacket for protection and tension Remarks: Conectors FC/PC 307663 **Triax Optical Cable 5mtr** TFC 05 - Steel armored 5 metre single mode fibre optic cable - G657A, 9/125 μm . **Brand:** Triax Pre-connected FC/PC cables for easy installation. Low attenuation of 0.3 dB per km **UV-resistant LSZH** Steel-reinforced jacket for protection and tension Size: 5M Remarks: Conectors FC/PC **Triax Optical Cable 10M** TFC 10 - Steel armored 10 metre single mode fibre optic cable - G657A, $9/125 \mu m$. **Brand:** Triax Pre-connected FC/PC cables for easy installation. Low attenuation of 0.3 dB per km **UV-resistant LSZH** Steel-reinforced jacket for protection and tension Size: 10M Remarks: Conectors FC/PC **Triax Optical Cable 15mtr** TFC 15 - Steel armored 15 metre single mode fibre optic cable - G657A, $9/125~\mu m$. **Brand:** Triax Pre-connected FC/PC cables for easy installation. Low attenuation of 0.3 dB per km **UV-resistant LSZH** Steel-reinforced jacket for protection and tension Remarks: Conectors FC/PC Size: 15M Triax Optical Cable 20M TFC 20 - Steel armored 20 metre single mode fibre optic cable - G657A, 9/125 µm. **Brand:** Triax Pre-connected FC/PC cables for easy installation. Low attenuation of 0.3 dB per km **UV-resistant LSZH** Steel-reinforced jacket for protection and tension Size: 20M Remarks: Conectors FC/PC **Triax Optical Cable 30mtr** TFC 30 - Steel armored 30 metre single mode fibre optic cable - G657A, $9/125 \mu m$. **Brand:** Triax Pre-connected FC/PC cables for easy installation. Low attenuation of 0.3 dB per km UV-resistant LSZH Steel-reinforced jacket for protection and tension Size: 30M Remarks: Conectors FC/PC 307670 **Triax Optical Cable 75M** TFC 75 - Steel armored 75 metre single mode fibre optic cable - G657A, 9/125 μm . **Brand:** Triax Pre-connected FC/PC cables for easy installation. Low attenuation of 0.3 dB per km **UV-resistant LSZH** Steel-reinforced jacket for protection and tension Remarks: Conectors FC/PC Size: 75M 307671 **Triax Optical Cable 100mtr** TFC 100 - Steel armored 100 metre single mode fibre optic cable - G657A, 9/125 **Brand:** Triax μm. Pre-connected FC/PC cables for easy installation. Low attenuation of 0.3 dB per km **UV-resistant LSZH** Steel-reinforced jacket for protection and tension

Remarks: Conectors FC/PC

Size: 100M



m.5.2 SC/APC Range



Terrestrial Reception TSC 01 Fibre patch cord 1m SC/APC 307010 Fibre Optic patch cord **Brand:** Triax The TSC xx patch cord is a single mode cable termanited with SC/APC connectror plugs at both ends. It is recomended for indoor installations in cable ducts and cabinets of fibre optic networks used for applications like: CATV distribution and DOSIS data transmission SAT-IF and DTT distribution Other fibre optic communication systems UPC 5702663070103 307011 TSC 02 Fibre patch cord 2m SC/APC Fibre Optic patch cord **Brand:** Triax The TSC xx patch cord is a single mode cable termanited with SC/APC connectror plugs at both ends. It is recomended for indoor installations in cable ducts and cabinets of fibre optic networks UPC 5702663070110 307012 TSC 05 Fibre patch cord 5m SC/APC Fibre Optic patch cord **Brand:** Triax The TSC xx patch cord is a single mode cable termanited with SC/APC connectror plugs at both ends. It is recomended for indoor installations in cable ducts and cabinets of fibre optic networks UPC 5702663070127 307013 TSC 10 Fibre patch cord 10m SC/APC Fibre Optic patch cord **Brand:** Triax The TSC xx patch cord is a single mode cable termanited with SC/APC connectror plugs at both ends. It is recomended for indoor installations in cable ducts and cabinets of fibre optic networks used for applications UPC 5702663070134 307014 TSC 20 Fibre patch cord 20m SC/APC Fibre Optic patch cord **Brand:** Triax The TSC xx patch cord is a single mode cable termanited with SC/APC connectror plugs at both ends. It is recomended for indoor installations in cable ducts and cabinets of fibre optic networks used for applications **UPC** 5702663070141 307015 TSC 30 Fibre patch cord 30m SC/APC Fibre Optic patch cord **Brand:** Triax The TSC xx patch cord is a single mode cable termanited with SC/APC connectror plugs at both ends. It is recomended for indoor installations in cable ducts and cabinets of fibre optic networks 307016 TSC 50 Fibre patch cord 50m SC/APC Fibre Optic patch cord **Brand:** Triax The TSC xx patch cord is a single mode cable termanited with SC/APC connectror plugs at both ends. It is recomended for indoor installations in cable ducts and cabinets of fibre optic networks used for applications SC/APC to SC/PC fibre cord Optical patch cable - SC/APC - SC/PC - singlemode **Brand:** Triax Pre-connected cables for easy installation, for singlemode use, LSZH yellow Size: 1M





m.5.2 SC/APC Range Terrestrial Reception Fibre Patch Leed 3 M FC/PC - SC/PC Optical patch cable - FC/PC - SC/PC - singlemode **Brand:** Triax Pre-connected cables for easy installation, for singlemode use, LSZH yellow Size: 3M 307580 SC/APC to SC/APC Optical patch cable - SC/APC - SC/APC - singlemode **Brand:** Triax Pre-connected cables for easy installation, for singlemode use, LSZH grey Size: 2M SC/APC to SC/APC 1M Yellow Fibre Patch Cable SC APC Fiber Patch Cable optical fibre Patch cord 1m 2.0mm PVC Simplex Single **Brand: OEM** Mode Remarks: SC/APC Size: 1M SC/APC to SC/APC 2M Yellow Fibre Patch Cable **SCAPC2M** SC APC Fiber Patch Cable optical fibre Patch cord 2m 2.0mm PVC Simplex Single **Brand: OEM** Mode Remarks: SC/APC Size: 2M m.7 Enclosures 252410 **Triax PTB Medium Grey** The enclosure type PTB is designed to house the last final outdoor fibre subscriber **Brand:** Triax connection. It can be mounted inground or secured to a wall or similar structure in either streetside or free-standing applications. Comes with 3 brackets mounted. Number of subscribers max. 24 End of Line: IP Rating IP 34D, Protection class IK 10 **Size:** 1004H x 230W x 80D Remarks: Limited Stock 307910 TOS-Cab 16 Cabinet -for PLC Splitters up to 16-way Distribution box for TRIAX PLC splitters TOS xxSC, splice trays, layout pigtails to **Brand:** Triax match trunk and drop fibre cables. Can be used as fibre optic terminations of optic access network or sub-distribution points in and outdoor. - Plastic enclosure, flame retardant, aging and UV resistant - Special screw and key for its door lock



- Mounting on wall or on pole
- Bi-layer structure of the box: bottom for splicing and upper layer for splitting and distribution
- Special lock device for outlet of drop cables
- 2 standard slots for TOS xxSC PLC splitter cassettes--> max splitting factor: 16

Size: 120 x 340 x 280mm Remarks: IP 65 UPC 5702663079069



m.7 Enclosures



Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

307911

TOS-Cab 32 Cabinet -for PLC Splitters up to 32-way

Distribution box for TRIAX PLC splitters TOS xxSC, splice trays, layout pigtails to match trunk and drop fibre cables.

Can be used as fibre optic terminations of optic access network or sub-distribution points in and outdoor.

- Plastic enclosure, flame retardant, aging and UV resistant.
- Special screw and key for its door lock
- Mounting on wall or on pole
- $\mbox{\sc Bi-layer}$ structure of the box: bottom for splicing and upper layer for splitting and distribution
- Special lock device for outlet of drop cables
- 2 standard slots for TOS xxSC PLC splitter cassettes--> max splitting factor: 32

Size: 120 x 340 x 280mm **Remarks:** IP 65



Triax 19" Fibre Splitter Rack Case

19" Rack Cabinet to mount Casette Fibre Splitters Easy mount over 100 Splits - complete with cable managment clips 19cm High **Brand:** Triax

Brand: Triax

UPC5702663079069





N. Digital Distribution



Satellite Reception

Terrestrial Recention

PTV I

nplifiers | Receive

Headend

Antennas

N. Digital Distribution

DIGITAL

Digital Distribution Category Index

N. Digital Distribution Solutions, Headends and Equipment

- n.1 TDX
- n.2 TDH800
- n.3 Modulators
- n.4 Cat TV
- n.5 DRM Servers
- n.6 Ikuzi HT Modules
- n.7 Casting
- n.8 Compact Headends
- n.9 Ikuzi Flow

Remarks: Page 1 of 13

n.1 TDX

492006

TDX Redundant Power Supply Unit

The TDX Redundant power supply provides you with a high degree of power assurance in connection with your TDX headend system.

Brand: Triax



The redundant power supply uses two identical power supply units mounted in a mechanical frame. Only one of the two units will be active at all times supplying power. If one power supply unit breaks down the other unit instantly takes over and thereby prevents an interruption of the supply of power.

492091

TDX Black Edition

TRIAX Black Edition Brand: Triax

is the ultimate choice when delivering reliable solutions to the hospitality sector. Our solutions fully support upgrades and new installations.

The TDX Black Edition cabinet is designed with up to 16 input modules and 6 Quad output modules; it is extremely compact and can therefore be easily installed on a wall or in a 19 "rack. Whether it is related to the installation, maintenance or repair, all inputs, outputs and cables can be easily installed and operated from the front of the cabinet.



Up to three TDX Black Edition Headends can be combined as one system of input and output signals, as such up to 72 PAL, COFDM or QAM channels are possible (or 480 IP services). The new HTML5 user interface guarantees easy installation, remote control and system monitoring via SNMP.

DRM integration for secure HD-service distribution is supported and can be easily handled with the Simulcrypt interface.

With the PID-management the TDX Black Edition supports services changes without any retuning of TV's.

Size: 290x240x440mm Remarks: Sky CAM Module Approved

TDXCARDS

TDX Cards Sub Category Index

n.1 TDX Cards

n.1.1 Front End Cards

n.1.2 Back End Cards

n.1.3 IPTV

n.1.4 Parts

Remarks: Pages 1 of 5

n.1.1 Front End Cards



n.1.1 Front End Cards



150

Demodulator Type: QPSK/8PSK

DiSEqC level: 1.1

LNB LO/HI programmable: 0/22 kHz

LNB V/H programmable: 0...13...18/300 V/mA

Input level: 55...75 dBµV **Size:** 29 x 132 x 50 mm

492023

TDX Front END DVB-T/T2

DVB-T2 input module, The DVB-T/T2 module is able to receive a complete transponder. All services on the chosen frequency will be transferred to the TDX pool. Input frequency: 177, 5 - 226,5 / 474-862.

COFDM demodulator

Demodulator/Mode: 16QAM, 64QAM / 2k and 8k.

Input Level 45...75 dBµV

Size: 29 x 132 x 50 mm

n.1.2 Back End Cards

492050

TDX PAL Backend FTA

TDX backend PAL output module [DVB-S/S2] - Quad FTA. Any of the services coming from the TDX Pool can be modulated to an analogue PAL signal. It is possible to send out 24 PAL services/TV programs from one cabinet. Each of the output modules can be delivered with 2 CI-slots. Full band modulator.

i-slots. Full band modulator. End of Line:

VSB - VHF/UHF, mono, A2, Nicam

Size: 17 x 162 x 185 mm

492056

Back End QAM CI Module

QAM Quad output module. It is possible to create your own bouquets of services/TV programs, available in the TDX Pool, and put them together in a QAM data stream. Depending on the bandwidth of each service it is possible to mix all the services and use the total bandwidth in an optimal way.

Size: 17 x 162 x 185 mm Remarks: Indent

492061

TDX Backend COFDM with CI

TDX Backend - COFDM quad output module. It is possible to create your own bouquets of services/TV programs, available in the TDX Pool, and put them together in a COFDM data stream. Depending on the bandwidth of each service it is possible to mix all the services and use the total bandwidth in an optimal way. $2 \times CI$ Slots -Suitable for 2 Sky CAMS

Size: 17 x 162 x 185 mm

492070

TDX Backend Twin CI Module

The 2 x CI backend module enables you to take several services depending on CAM module from the TDX pool, decrypt them and loop them back in decrypted form to the pool.

2xCl = 2 Sky Cam Modules **Size:** 17 x 162 x 185 mm **Brand:** Triax

Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax



n.1.2 Back End Cards



Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax

Terrestrial Reception

192072 TDX Back End IP Card

> The IP output module is an output module for transmission of digital video, audio and miscellaneous data, encapsulated within one or more MPEG2/DVB single program transport streams.

The TDX headend system provides the following functionality when the IP out module has been installed:

IP multicast streaming (UDP streaming)

RTP option

IGMP version 2

SPTS including SDT, PAT, PMT, CAT

Packet ratio of 3-7 TS packet per IP packet ratio 3-7:1

Max. BW 720 Mbits/s output per IP output module

96 services per IP output module/AUX socket

Possible to change service ID (SID) Possible to select from IP via Link

2 x CI slots complying EN 50 221

Size: 17 x 162 x 185 mm

TDX Pro:Idiom® IP Backend

TDX Backend - Pro:Idiom®* IP Output Module

The Pro:Idiom® IP output module is an TDX module for transmission of digital video, audio and miscellaneous data, encapsulated within one or more MPEG/DVB single program transport streams. The Pro:Idiom® IP output module support DRM function for LG hospitality TVs to secure protected distribution of the IPTV-services in a IP Network. Each TDX main unit can be equipped with two Pro:Idiom® IP output modules.

The TDX headend system provides the following functionality when the Pro:Idiom® IP output module has been installed:

IP multicast streaming (UDP streaming)

RTP option

IGMP version 2

SPTS including SDT, PAT, PMT, CAT

Packet ratio of 3-7 TS packet per IP packet ratio 3-7:1

48 services per Pro:Idiom® IP output module/AUX socket and 24 of them can be

scrambled with Pro:Idiom®

Possible to change service ID (SID)

Possible to select from IP via Link

2 x CI slots complying EN 50 221

The backend module package consist of:

IP output module

Auxiliary board

SFP transceiver RJ45 - copper

* Pro:Idiom® is a registered trademark of Zenith Electronics LLC

n.1.3 IPTV

TDX IPTV-out 12 service - Start



IP output SFP. When the incoming signals are distributed in the IP format, you will need a copper or fibre SFP (RJ45) and additional SW.

The start package (item no. 418040) for IP is for 12 IP services

Remarks: Software Licience

TDX IPTV-out 12 service - Expand



IP output SFP. When the incoming signals are distributed in the IP format, you will need a copper or fibre SFP (RJ45) and additional SW. The start package is for 12 IP services, and for additional services the IPTV expand software (item no. 418041) is supplied in packages for 12 services

Remarks: Software Licience

N - Pg 3 Ph 03 344 5417 Fax 03 344 5419





















March-23



www.digitalimports.co.nz





n.1.3 IPTV



Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax

TDX IP+4 out

When the incoming signals are distributed in the IP format, you will need a copper or fibre SFP (RJ45) and additional SW.

Remarks: Software Licience

The add-on package (item no. 418043) for IP is for 4 Extra IP services.

418047 TDX IPTV-in 4 service - Start

IP-in 4 IP services – Start pack

When the incoming signals are in the IP format, you will need a RJ45 or fibre SFP and additional software licenses, to receive the IP Services. This start package is for 4 IP-in services.

Remarks: Software Licience

418048 TDX IPTV-in 4 service - Expand

IP-in 4 IP services – Extension pack - 418048 Brand: Triax

For additional IP-in services an IPTV-in extension pack of 4 extra licensees can be ordered.

Remarks: Software Licience

492086 SFP RJ45 EOLT -C12-02

SFP (Small Form - Factor Pluggable). It is possible to create your own bouquets of services/TV programs, available in the TDX Pool, and put them together in an IP data stream.

Features:

Support 1000BASE-T operation in host systems with SGMII interface

Up to 1.25Gbps bi-direction data links

Hot-pluggable SFP footprint

Fully metallic enclosure for low EMI

Low power dissipation (1.05 W typical)

Compact RJ-45 connector assembly

100m transmission over unshielded

twisted pair (UTP) Category 5 Cable

492087 SPF Fibre 850nm EOLS-8512MXX

IP output via fibre. It is possible to create your own bouquets of services/TV programs, available in the TDX Pool, and put them together in an IP data stream.

You can use fibre cable to transmit your IP stream. Fibre LC - 850 nm. Gigabit

Ethernet.

Features:

Operating data rate up to 1.25 Gbps

850nm VCSEL Laser Transmitter

550m with 50/125 MMF, 300m on 62.5/125 MMF

Duplex LC Connector Interface

Hot Pluggable

Compliant with MSA SFP Specification

Digital diagnostic monitor interface

Compatible with SFF-8472 **Remarks:** Fibre LC - 850 nm

492088 Triax SFP Fibre 1310nm

IP output SFP via fibre. It is possible to create your own bouquets of services/TV programs, available in the TDX Pool, and put them together in an IP data stream.

You can use fibre to transmit your IP stream. Fibre LC - 1310 nm. Gigabit Ethernet.

Features:

Operating data rate up to1.25Gbps 1310nm VCSEL Laser Transmitter 2000m with on 62.5/125 MMF

Duplex LC Connector Interface

Hot Pluggable

Compliant with MSA SFP Specification

Compatible with SFF-8472 Remarks: Fibre LC - 1310 nm



N. Digital Distriubtion n.1.4 Parts

n.1.4 Parts

Decoder Cable Sub-D to Phono



Triax AV cable - 1.50 m. 15 pol D-sub connector - 3 x RCA Phono connector.

Brand: Triax

490139

TDX Key and Screw Kit



Pack Containing TDX Screws and Key

Brand: Triax

492000

TDX Controller Module



Replacement TDX Main Board / Control Board

Brand: Triax


TDX Power Supply Module



Replacement Power Sypply for TDX **Brand:** Triax

Total Weight 0,905 kg

TDX Fan Unit



0,250 kg

Brand: Triax

Total Weight

Remarks: TDX Parts

n.2 TDH800



N. Digital Distriubtion n.2 TDH800



Brand: Triax

Brand: Triax

tellite Reception | Terrestrial Rec

592890 **Triax TDH 800 Main Cabinet**

TDH 800. Technology, that can do more.

The cabinet is designed as one system of input and output signals, as such over 100 Digital Channels are possible, it is extremely compact and can therefore be easily installed on a wall or in a 19 "rack. Whether it is related to the installation, maintenance or repair all inputs, outputs and cables can be easily installed and operated from the front of the TDH 800.

TDH 800 output amplifier can be software-adjusted within the range 85 dBµV through 93 dBµV.

Specifications

Can output Digital and Analogue at the same time: YES Output level max. 93 dBµV (105dBµV Analogue)

Test point -20 dB

Frequency range (RF OUT) 47-862 MHz

AC Supply voltage 90-260 (50/60 HZ IEC320 1.8m cable) VAC

Power Consumption (typ.) 280 (min 20) W Temperature - operating -10 to +50 °C External RF OUT F-connector PC interface **RJ 45: HTML5**

YES **POOL Technology**

Size: HDW 265 x 240 x 440 Remarks: Sky CAM Module Approved

TDH800CARDS


692820

TDH800 Cards Sub Category Index

n.2 TDH800 Cards

n.2.1 Front End Cards

n.2.2 Back End Cards



n.2.1 Front End Cards

TDH 811 Frontend - DVB-S/S2 [QPSK/8PSK]

The DVB-S/S2 frontend module is an input module for the reception of digital satellite signals in a TDH 800 headend system. The module can receive a complete transponder and all services on the chosen frequency can be transferred to the TDH 800 pool. The DVB-S/S2 frontend module includes an IF tuner with antenna loop through and a QPSK/8PSK demodulator with serial transport stream input to

the TDH 800 headend system.



Features:

Preconfiguration from/to file through system controller module.

Log to file/flash.

DVB-S compliant, up to 45 MS/s.

DVB-S2 compliant, up to 37 MS/s.

Programmable LNB control: 0/14/18V - 0/22kHz.

All services will be transferred to the TDH 800 pool.

DiSEqC compliant (1.0)

Size: 32 x 132 x 50 mm



n.2.1 Front End Cards



ellite Reception | Terrestrial Reception | Amplifiers | Receive

TDH 813 Frontend - DVB-T/T2 [COFDM]

The DVB-T/T2 frontend module is an input module for the reception of both T and T2 digital terrestrial signals. The module can receive a complete terrestrial MUX and send all services in the MUX to the TDH 800 pool. The DVB-T/T2 frontend module includes a tuner, with integrated gain control and channel filtering, and a COFDM demodulator with serial transport stream input to the TDH 800 system.

Brand: Triax



Reception of HD and SD services

Software downloading through TDH 800 system controller module Preconfiguration from/to file through system controller module Log to file/flash

All services will be transferred to the TDH 800 pool

Size: 29 x 132 x 50 mm

TDH 814 Frontend AV Encoder Module

The AV encoder module converts analog video (CVBS) and audio signals from a set top box, a DVD player, a camera or other sources, into a MPEG2 or MPEG4 data stream. This data stream is then available in the TDH 800 pool and can be sent out on all TDH 800 output modules.

Audio embedded: AAC, 48 kHz/MPEG-2(L1), Stereo

Output Video Codec: MPEG-2, MPEG-4 Scan Resolution: 525, 625 Pixel Connector Type: 15pol Sub-D

Size: 29 x 126 x 53 mm Remarks: Requires D-Sub Cable **Brand:** Triax



TDH800 Backend COFDM Card no CI

Quad COFDM backend modules - DVB-T in FTA. The TDH 800 quad COFDM backend module is an output module that enables you to create up to 4 muxes of services / TV programs which are available from the TDH 800 pool. The services are distributed in a COFDM data stream. The COFDM output modules is delivered in a free-to-air version.

n.2.2 Back End Cards

MER: 35.0 dB

Output level adjustment: +3...-17 dB Output Level System: $90.0 \pm 1.5 \text{ dB}\mu\text{V}$ Output QAM Modes: 16QAM, 64QAM, QPSK

Size: 17 x 162 x 182 mm



TDH 844 Backend - COFDM -2CI

Quad COFDM backend module - with 2 x CI slots. The TDH 800 quad COFDM backend module is an output module that enables you to create up to 4 muxes of services / TV programs which are available from the TDH 800 pool. The services

are distributed in a COFDM data stream.

Carrier supported: 2K

Guard Interval: 1/32, 1/16, 1/8, 1/4

MER: 35.0 dB

Output level adjustment: +3...-17 dB Output Level System: 90.0 ± 1.5 dBµV Output QAM Modes: 16QAM, 64QAM, QPSK

Output spectrum: Normal Spurious Signals: > 60 dB

TDH 847 2CI Backend

Size: 24 x 162 x 182 mm

The 2 x CI backend module enables you to take several services depending on CAM module from the IP pool, decrypt them and loop them back in decrypted form to the pool.

Size: 24 x 162 x 185 mm

Brand: Triax

Brand: Triax

Brand: Triax



n.3 Modulators



Brand: Triax

| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

n.3 Modulators

Triax HDMI to COFDM Modulator -With Loop and IR

MOD103T HDMI to COFDM Modulator

Watch + control HD content at each TV location using existing coax cable

infrastructure

Compact design

All inputs and outputs on one side for ease of installation

Full HD Video and HDMI Loop through

IR Control when used with Digital Links and IR Pass Amplifiers

Combine multiple modulators together for more HD channels on your network -

watch different sources on different TV's

IR Emitter required at HDMI source (supplied)

Compatible with HDMI sources

Ideal solution for domestic and commercial installations

All inputs and outputs on one side for ease of installation

Full HD Video and HDMI Loop through

IR Control when used with Digital Links and IR Pass Amplifiers

IR Sensor & 2 RF Outputs

Output combined with existing RF signals

Channel 21-69

Supplied with 230VAC to 12VDC F Power Supply.

Size: 106 x 32 x 220mm Remarks: HDMI Loop out and IR

370228 Triax Digital Link

The Triax Digital Link will allow control of your digital receiver whilst viewing in **Brand:** Triax

other rooms around the home.

The Triax Digital Link is compatible with receivers with an output marked RF-OUT2 $\,$

that takes a second TV output together with a 9 volt DC supply Designed to work with the TriLink Kits and Triax HDMI Modulators

37.9kHz Carrier Output Signal Frequency - On-Off Keyed 7MHz Carrier Line

Size: 80mm x 100mm **UPC** 5702663702288

DM-02TH Domestic Digital HDMI modulator basic

Simple HDMI Modulator for Domestic Only Installations.

Brand: OEM

HDMI In HDMI Out RF In

RF Out

AV In through 3.5mm 12VDC Plug Pack

HD860Q 4 in HDMI & Component COFDM DVB-T Modulator

4 X HDMI inputs , 1 x RF output (1 mux) **Brand:** Helix

Output Level : 100dBuV RF Level adj: 0-30dBuV Attenuation Step 1db Max Video Res: 1080p 30FPS

Audio: MPEG, AAC Video: HDMI 1.4 h.264

HTTP Log in an control - Fully Commercial Modulator

Remarks: Full LCN and NZ Channel Support

n.4 Cat TV



N. Digital Distriubtion n.4 Cat TV

TRIAX

350661

NBL 0200 Cat TV Balun



The balun (balanced - unbalanced) converts from catTV Panel transmitter via generic cabling symmetrical signal (100 ohms) to devices (eg TV and radio) coaxial signal (75 Ohm).

The catTV balun is connected by patch cable to the RJ45 socket.

Audio input signals via RJ 45

Reconversion of 100 Ohm in 75 Ohm

Amplification of the RF signal


Assignment of the signals on the outputs

Skew and attenuation of max. 50 dB to compensate

Plug and Play, 3 switch positions for easy adaptation to different cable lengths

350663

CATTV Panel NPN3412



Active Transfer box for distribution of CATV signals over a generic building wiring. The panel with electric NPN input (coaxial / 75 Ohm) converts the input signal to a balanced signal (sym./100 Ohm) to it intrude on the Patch (Patch Panel) of the building wiring to the subscriber line.

Super low noise push-pull technology Level control + equalizer at the input

Input test jack

947748001

NBL 0265 Cat Tv Balun



The balun (balanced - unbalanced) converts from catTV Panel transmitter via generic cabling symmetrical signal (100 ohms) to devices (eg TV and radio) coaxial signal (75 Ohm).

The catTV balun is connected by patch cable to the RJ45 socket.

Audio input signals via RJ 45

Reconversion of 100 Ohm in 75 Ohm

Amplification of the RF signal

3 variants: without RK, RK 5-30 MHz, 5-65 MHz RK

Skew and attenuation of max. 50 dB to compensate

Plug and Play, 3 switch positions for easy adaptation to different cable lengths

n.5 DRM Servers

418073

TDX Samsung DRM backend license



TDX Samsung DRM license
The Samsung DRM license makes it possible to scramble IP and digital modulated services (QAM, COFDM) in the TDX with a scrambling code that Samsung hospitality TV's with integrated DRM function, can receive and de-crypt.

This offers a cost effective solution to distribute premium content in a hotel network.

The Samsung lynk or reach software is required to manage the scrambling, and

runs on an external server. **Remarks:** License

n.6 Ikuzi HT Modules

IKU3863

HTI-424 Quad transmodulator with IPTV



High Density Universal transmodulator

Quad transmodulator with IPTV Transmodulator 4 universal DVB inputs and 4 IPTV inputs

4 outputs DVB-T/C; 64 IPTV multicast outputs

2 CAM slots

Remote managment enabled

Brand: Triax

Brand: Triax

Brand: Triax

Brand: Triax

Brand: Ikuzi



N. Digital Distriubtion n.6 Ikuzi HT Modules





Brand: OEM

Brand: Triax

Terrestrial Reception **KU3864 HTI-404 Quad Transmodulator** High Density Universal transmodulator Brand: Ikuzi DVB-S/S2, DVB-T/T2, DVB-C to DVB-T/C Transmodulator Quad universal tuner Output 4 DVB-T or DVB-C selectable channels Remote management enabled **IKU3865 PSU-150 Power Supply Module** Power Supply module Brand: Ikuzi High output power High efficiency Optimizes consumption **IKU3866 Base-plate for HTI Headend** Base-plate for HTI Headend Brand: Ikuzi Capacity for 5 modules Interconnected base-plate Wall and rack fixing **IKU3868** HTA-125 47-862 MHz Broadband power amplifier 47-862 MHz Broadband power amplifier Brand: Ikuzi Multi-channel output signal Gain adjustment Extension input

n.7 Casting

168323-CM

Hospitality Chrome Cast Device



Hospitality programmed chrome cast device. Ordered as part of casting solution.

383350 Triax Cast Server -300

Triax Cast server for upto 300 Cast Devices Robust, reliable and well proven platform

- · Slim and space saving
- Optional 1U 19" bracket for rack mount
- In-house developed Software
- Uses Standard Google Chromecast
- Enables intuitive, privacy-focused dependable casting experience
- Easy to configure
- Easy to manage

Contact us to discuss this solution.

Remarks: Cost-effective in-room entertainment UPC 887993002385

383351 **Server 19" Bracket for Triax Cast**

Provides 19" rack mounting for the Triax Cast Server 300 **Brand:** Triax





n.7 Casting I RIAX

Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

7. 6 . 6

Triax Cast Server -60

Triax Casting Server for 60 or less cast devices Robust, reliable and well proven platform

Slim and space saving

• In-house developed Software

- Uses Standard Google Chromecast
- Enables intuitive, privacy-focused dependable casting experience
- Easy to configure
- · Easy to manage

Contact us to discuss this solution.

383650

Triax Cast License Key - 1 Year

Triax Cast price is per Cast / Per Year invoiced in advance.

Brand: Triax

Brand: Triax



Triax Cast Lock

Device to protect the Google Chromecast from theft and tampering

· Chromecast unit locked inside the CastLock

· CastLock secured to the TV with a wire

UPC 5702663839946

Brand: Triax

Brand: Triax

Brand: Triax

n.8 Compact Headends


418740

TDcH IP Out Licence 100IP

To distribute IPTV signals out from the TDcH you will need a SFP adapter (article number: 492086) and a IP-out activation license key.

The license activates the IP-out functionality and is not based on service quantity. Maximum services at one TDcH is 100 IP-out services (TV and Radio) or maximum output bandwidth of 950 Mbit.

All TDcH headends are able to activate the IP-out functionality via a license key.



PID management

Real time output load measurement

Service Discovery protocols (M3U, M3Ue, M3Uepp, XSPF)

EPG for IP-out services. EIT for current service inside the SPTS streamed via UDP/RTP multicast direct to the TV set or as Samsung EPG XML for Samsung SINC or REACH server.

Remarks: 100 Channels



TDcH Compact Headend 16S-I

TDcH Compact Headend with CI Interfaces

Satellite configuration is available with

4 DVB-S2X inputs distributed to16 tuners,

16 QAM or COFDM modulated output muxes with 8 CI Slots

The TDcH compact headend is built for both wall mounting and 19 racks.

Each model stands just 90mm tall and the new integrated SCR multiswitch is an additional space-saving benefit.

Triax Next Gen Headend System.

IPTV Upgrade available 418740 for 100 IPTV Channels IPTV Inputs and SNMP also available with license.

Size: 19" Rack Mounting Remarks: Indent only







N. Digital Distriubtion n.8 Compact Headends



n.o Compact Headends							
Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas					
492782	TDcH 22STC - COFDM Compact Digital Headend						
	Satellite, terrestrial and cable configuration is available with 4 DVB-S2X inputs distributed to 16 tuners, 1 DVB-T2/C input distributed to 6 tuners, 16 QAM or COFDM modulated output muxes and 8 CI slots. The TDcH compact headend is built for both wall mounting and 19 racks. Each model stands just 90mm tall and the new integrated SCR multiswitch is an additional space-saving benefit.	Brand: Triax					
	Triax Next Gen Headend System.						
	IPTV Upgrade available 418740 for 100 IPTV Channels IPTV Inputs and SNMP also available with license.						
	ii iv inputs and sivivii also avallable with license.						
	6. 400 D. J. C. J. C. J.						
	Size: 19" Rack mount Remarks: Complete Compac Headend.						
492791	TDcH Compact Headend 16S						
	TDcH Compact Headend Satellite only	Brand: Triax					
** TV != (* (* (*)*)* (*)* D. D. D. D.	Satellite configuration is available with 4 DVB-S2X inputs distributed to16 tuners, 16 QAM or COFDM modulated output muxes The TDcH compact headend is built for both wall mounting and 19 racks. Each model stands just 90mm tall and the new integrated SCR multiswitch is an additional space-saving benefit.						
	Triax Next Gen Headend System. IPTV Upgrade available 418740 for 100 IPTV Channels						

Remarks: Indent only n.9 Flow Headend

Flow PSU

Size: 19" Rack Mount

Heat protection against failure of external air conditioning Greater efficiency using half-bridge technology Power correction factor

IPTV Inputs and SNMP also available with license.



4311

Flow SEC CI

Decryption(CAS) and encryption(DRM) in the same module 2 Common Interface slots Automatic reboot from CAM with decrytion faults Support of up to 16 SPTS per CAM

Brand: Triax



Flow Base 2.0

Self-assembled chassis Valid for both 19" rack or wall mount Tool-free and accessory-free assembly Multiswitch incorporated





Flow Out

Digital module 4 or 6 output channels COFDM or QAM

Brand: Triax



Four or six COFDM or QAM output Up to 8 SPTS per carrier Independent carriers on the spectrum Output level of 78 to $108db\mu V$



N. Digital Distriubtion n.9 Flow Headend



Flow Hub 2.0



It controls all the internal parameters of the headend own wifi LAN interface for local and remote access 2 X gigabit Ethernet ports for IPTV Configuration guided by an assistant

Brand: Triax

4315

Flow ENC - HDMI



4 HDMI inputs Video compression MPEG4 H.264 or MPEG2 **FULL HD quality**

Brand: Triax

Flow Cover 2.0



5 fans **Brand:** Triax Magnetic connection with triple function: mechanical adjustment,

Flow Device MGR - DRM



KUSI FLOW viewing device controller software Suppported devices

power supply and speed control of the fans Noise and friction-free magnetic technology

- FLOW STB
- FLOW STB AC3+
- LG TV with HCAP HTML5 API
- Samsung TV with H.BROWSER API* Philips TV with JAPIT API

4319

Flow INx4



Four universal input DVB S/S2/T/T2/C multistandard Autoscan

Brand: Triax

Brand: Triax

RPSU - Redundant PSU



Heat protection against failure of external air conditioning Integrates two identical power suplies Power supply can be changed without disconnecting the headend **Brand:** Triax



O. EZI Fix System

O EZI Fix System



atellite Reception | Terrestrial Receptior

O EZI Fix System

EZIFIX

EZI Fix Product Category Index



o.1 Ezi Fix

- o.1 Saddles
- o.2 Pipe Clips
- o.3 Bases
- o.4 Primer
- o.5 Tools

Remarks: Page 1 of 5

o.1 Saddles

EF0904

Data Saddle Neutral 16 x 20 and Tie



16mm x 20mm Data Saddles - Natural S.W.L. 1kg Included Cable Tie

Brand: Ezi-Fix

Remarks: 1Kg Hold

EF0994

Data Saddle 16 x 20 and Tie, Black



16mm x 20mm Data Saddles - Black S.W.L. 1kg Included Cable Tie

Brand: Ezi-Fix

Remarks: 1Kg Hold

EF1304

30mm Data Saddle and Tie, Natural



30mm Data Saddles - Natural S.W.L. 5kg Included Cable Tie

Brand: Ezi-Fix

Ezi Fix Natural Saddle Blister Pack



30mm x 30mm Data Saddles - Natural S.W.L. 5kg 10 Pack - Includes Cable Tie

Brand: Ezi-Fix

Remarks: 5Kg Hold

Remarks: 5Kg Hold

UPC 9328143000017

EF1324B

Ezi Fix Red Saddle Blister Pack



30mm x 30mm Saddles - Red S.W.L. 5kg 10 Pack - Includes Cable Tie

UPC 9328143000017

Brand: Ezi-Fix

30mm Data Saddle and Tie, Blue



30mm Data Saddles - Blue S.W.L. 5kg Included Cable Tie

Brand: Ezi-Fix

Remarks: 5Kg Hold

Remarks: 5Kg Hold





O. EZI Fix System o.1 Saddles tellite Reception | Terrestrial Reception 30mm Data Saddle and Tie, Black 30mm Data Saddles - Black Brand: Ezi-Fix S.W.L. 5kg Included Cable Tie Remarks: 5Kg Hold **UPC**837710000392 Black 50mm M-6 Boss **EF2094** 50mm Threaded Boss Fasteners Brand: Ezi-Fix Remarks: Boss of M6 Bolt Black 50mm M-10 Boss 50mm Threaded Boss Fasteners Brand: Ezi-Fix Remarks: Boss for M10 Bolt Natural 50mm Saddle **EF2204** 50mm Data Saddles - Natural Brand: Ezi-Fix S.W.L. 10kg Remarks: 10Kg Hold **Black 50mm Saddle** 50mm Data Saddles - Black Brand: Ezi-Fix S.W.L. 10kg Remarks: 10Kg Hold Black 50mm M-8 Boss 50mm Threaded Boss Fasteners **Brand:** Ezi-Fix



Remarks: Boss for M8 Bolt

o.2 Pipe Clips

Grey 16mm Pipe Clip



Adhesive Pipe Clip Fasteners Brand: Ezi-Fix Size: 16mm

Remarks: 16mm OSD Pipe

Grey 20mm Pipe Clip



Adhesive Pipe Clip Fasteners Brand: Ezi-Fix Size: 20mm

Remarks: 20mm OSD Pipe



O. EZI Fix System





| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

FF1784

Grey 25mm Pipe Clip



Adhesive Pipe Clip Fasteners Size: 25mm

Brand: Ezi-Fix

Remarks: 25mm OSD Pipe

o.3 Bases

EF1891

Socket Base Black



Adhesive 413 Socket Base Fasteners
Suitable for Bubble Plugs, and Junction boxes (Square or round)

Brand: Ezi-Fix

EF5414

White Ezi-Screws - Bag of 100



Original Ezi-Screw Gib anchors

Brand: Ezi-Fix

Bag of 100

Remarks: Price is for Bag 100pcs

o.4 Primer & Tape

EF0033

Primer Can Clear



FX-10 Primer Aerosol

150gm spray can - Clear

Remarks: Horizontol Spray Nozzle

EF0034

Primer Can Orange



FX-10 Primer Aerosol Brand: Ezi-Fix 150gm spray can - Orange

Remarks: Vertical Spray Nozzle

UPC 9328143000000

UPC 9328143277150

EF3033

Ezi Fix 30mm Tape 33M Roll




30mm Double Sided Tape

Brand: Ezi-Fix
33 meter Roll

EF5011

Ezi Fix 50mm Tape 11M Roll



50mm Double Sided Tape

Brand: Ezi-Fix

11 meter Roll

EFAA11

Ezi Fix 30mm Tape 11M Roll



30mm Double Sided Tape

Brand: Ezi-Fix

11 meter Roll



O. EZI Fix System o.4 Primer & Tape



EFAA30-99

EziFix VHB Tape From 99M Roll

30mm Double Sided Tape 99M Roll

Brand: Ezi-Fix

Size: 30mmx 99M Remarks: VHB Roll

o.5 Tools

Remarks: Suitable for Saddles and Boss

Remarks: Suitable for Pipe Clips

EF0092A


Universal Head Only



Brand: Ezi-Fix



Pipe Clip Head Assembly



Brand: Ezi-Fix



EF0100A

30mm Saddle Head for Ezi Fix Tools

30mm Saddle Head - Handle not included

Brand: Ezi-Fix



Remarks: Suitable for 30mm Saddles

T-200 Tool C/W 0092A Universal Head

Mini Tool with Universal Head

Brand: Ezi-Fix



Remarks: Suitable for Saddles and Boss T-200 MINI TOOL C/W 0093A Pipe Clip Head



Mini Tool with Pipe Clip Head. For Pipe Clips - 12mm, 16mm, 20mm, 25mm. Brand: Ezi-Fix

T-200 Mini Tool C/W 0094A 30mm Saddle Head



Mini Tool with 30mm Saddle Head Brand: Ezi-Fix

Remarks: 30mm Saddle Head

Remarks: Suitable for Pipe Clips

EF0101

T-400 TOOL C/W 30MM SADDLE Head



Mini Tool 400mm Long with Universal Head Brand: Ezi-Fix

Remarks: Can be fitted with either head



O. EZI Fix System o.5 Tools



	0.5 I 00IS			INIAX	
Satellite Reception	Terrestrial Reception	IPTV Dish	es Amplifiers Receivers	Headends Antennas	
EF0101C	T-400 TOOL C/W PIPE				
	400m Tool with Pipe Clip	Head		Brand: Ezi-Fix	
EF0103	T-1500 Tool No Head				
	Extension Tool Extends U Head not included	p To 3m		Brand: Ezi-Fix	
EF0103A	Ezi Fix T1500 Tool wit	th 0092A Head			
	Extension Tool Extends Up To 3m Universal Head included			Brand: Ezi-Fix	
EF0105	Ezi Fix T1500 Primer Tool with Primer Head				
95	Primer Tool with 0099A P	rimer Head - Extends t	o 3m	Brand: Ezi-Fix	



P. Meters P. Meters



atellite Reception | Terrestrial Reception ishes | Amplifiers | Receiver

P. Meters

METERS

Meters / Test Equipment Category Index



P. Meters and Test Equipment p.1 DTT / SAT / Combined p.2 Fibre

Remarks: Page 1 of 2

p.1 DTT / SAT / Combined

0000/3429

TechniSat Digimeter 9

Spectrum capability's

Spectrum capability's



Professional Satellite / Terrestrial / QAM / FM Meter. **Brand:** TechniSat This TechniSat meter is 9" Touch Screen meter with Data Logging, and full

The meter can be brought with Optional IPTV and Stream analysing.

0000/3429AI

TechniSat Digi Meter 9 - All In



Professional Satellite / Terrestrial / QAM / FM Meter / Fibre **Brand:** TechniSat This TechniSat meter is 9" Touch Screen meter with Data Logging, and full

This is the All IN version.- Everything from the 0000/3429 Plus extras. Includes Wifi Measurement 2.4 and 5G, Includes IPTV and Transport Stream reader.

Triax UPM 1400 Combi Meter

Triax entry level professional Combi Meter DVBS/S2 - DVBT/T2 with Spectrum

BER & MER measurement in COFDM, QAM and QPSK (Terrestrial, Cable, Satellite)

Stream information, Constalation screens

5" TFT Display with quick operation buttons and full keypad Physical power switch and supplied with 230V & 12V Charging

Great handy modern meter & Handy case with room to hold cables and connectors.

Everything you need to get underway with an entry meter.

Remarks: Indent usless stock available UPC 5702663045798

5401253

TELESTAR SATPLUS 3



The TELESTAR SATPLUS 3 is a digital instrument to set up and control reception systems of all major reception modes (DVB-S, DVB-C, DTT).

The HDTV-capable device displays various graphs and modes of analysis over its 5" color display. Furthermore, signal quality can be checked at a live TV picture. The instrument supports USB PVR mode, transport stream recording and MP3 playback, the powerful Li-Ion battery (11,1V/2600mAh) combines long operation time with short charging intervals.

A Nylon cover protects the SATPLUS 3 from external influences, such as dirt, dust or splashing water.

Size: 13x21x4.8cm

DTTM

Digital Terrestrial Signal Finder



Digital and Analogue TV Signal Strength Finder, Perfect for finding the best direction to pick up Freeview and Freeview HD signals.

Brand: Starview

Brand: Telestar

Brand: Triax



P. Meters p.1 DTT / SAT / Combined



Brand: Starview

Brand: OEM

Brand: Triax

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

FSAT

Starview Satellite Finder



In-Line Satellite finder perfect for DIY use. Enables you to align any satellite dish for optimum reception

Back light Illuminated meter display for night use, Easy operation, Audio tone, Input Frequency: $0.95 GHz \sim 2.15 GHz$

V8F

V8 APP Satellite Finder



APP based satellite finder meter.

Use your iPhone or Andriod Phone with Bluetooth APP to align your satellite dish The finder unit has a built in battery with the ability to power the LNB.

Will give you Signal Strength / Quality and Transponder list.

Excellent - simple finder - easy to use.

Chargeable from 5VDC - USB

Remarks: 230V Charger NOT supplied.

p.2 Fibre

307967

Triax Optical Power Meter



TOM 011 Optical Level Meter - An Optical Level Meter is an indispensable tool for any Installer running Fibre Optical cables of any sort.

Only by actually measuring the result and quality of the installed cable immediately upon installing it, You can be certain that it will work as expected, when powering on the system. Reduces post-installation fault finding to a minimum.

Display of measured values in dBm or mW Suitable for different wavelengths: 850, 1300, 1310, 1490, 1550 and 1625 nm Facilitates troubleshooting Backlit, easy to read display

March-23 www.digitalimports.co.nz P Ph 03 344 5417 Fax 03 344 5419 P - Pg 2



Q. Tools and Equipment

Q. Tools and Equipment



atellite Reception | Terrestrial Rec

Q. Tools and Equipment

TOOLS

Tools and Equipment Category Index



Q. Tools and Equipment q.1 Compression Tools

q.2 Coaxial Tools

Remarks: Page 1 of 2

q.1 Compression Tools

Triax BNC Compression Tool



Brand: Triax

360919

Triax RG6 Compression Pocket Tool - Long Type

Compression Tool For 360913 Long Compression Connector

Brand: Triax



Compression Tool, Universal, F Con

Works with a wide range of Compression Connectors

Brand: Triax



370042

Triax Pocket Compression Tool - Short Type..

Compression Tool For 153224 Short Compression Connector

Brand: Triax

Brand: Triax

Brand: Triax



CTK-01

Compression Tool Kit - Long

Compression Tool Kit Including: 20 x 360913 Compressions

10 x 75FJ - Joiner

2 x 154110 - Plug

1 x 349802 - 2 Way Splitter

1 x 360919 - Pocket Compression Tool

1 x 157009 - Cable stripper tool

Compression Tool Kit - Short

Compression Tool Kit Including: 20 x 153224 Compressions

10 x 75FJ - Joiner

2 x 154110 - Plug

1 x 349802 - 2 Way Splitter

1 x 370042 - Pocket Compression Tool

1 x 157009 - Cable stripper tool

q.2 Coaxial Tools





Q. Tools and Equipment q.2 Coaxial Tools



ellite Reception | Terrestrial Reception

Triax RG11 Cable Stripper



With rotary cable strippers, preparation of cable is reduced to a single operation resulting in precise stripping in the dimensions matching exactly with the connector. The non-expensive stripping tools are pre-adjusted for RG 11 cable

UPC 5707957050120

Triax Crimp Tool CRP 106F



Tool for crimping F-connectors to coax cables. Hex crimp sizes .(8.2 mm) and (11.9 mm). Typically used with KOKA 50 (5 mm), RG6, TX 165, RG 11 types.

Brand: Triax

Brand: Triax

Triax Cable Stripper



Triax Pocket Cable Stripper A compact and easy to use cable stripper for RG6 Includes a handy F Spanner

Brand: Triax

Triax Multi Cable Stripper Tool




All-in-one stripping and cutting tool **Brand:** Triax

This tool makes cable preparation much easier, as you don't need to carry several tools. The universal tool is suitable for stripping of RG 6, RG 59, RG 11 coax cables & CAT cables (standard and flat cables), combined with a built in cutting function.

UPC 5702661536380

Triax Crimp Tool 100,125,165





Brand: Triax

F Conn Triax F key



Simple tool for use with standard F Connectors **Brand:** Triax

UPC 5702661536083

HLT-323

Coaxial Cable Stripper RG59/6/7 and 11

Double Ended Coaxial Cable Pen Stripper Stripping Coax RG59/RG6/RG7/RG11

Brand: Triax





R. Power Supplies

R. Power Supplies



| Satellite Reception

Terrestrial Reception

plifiers | Receiver

Headends

Antennas

R. Power Supplies

PSU

Power Supplies Category Index



R. Power Supplies r.1 Plug Packs

Remarks: Page 1 of 2

r.1 Plug Packs

12VDC

12 volt Plug Pack



12VDC Plug Pack 2.5mm DC Plug Suitable for STB power supply replacements.

12VDCF

12VDC Power Supply With F Connector



12VDC Plug Pack F-Type Plug Input 100-240VAC Output 12VDC - 500mA Unload standby power 0.3w Rated power 6W

UPC 7647647647

Brand: Triax

239224

IFP 522 Power Supply/Inserter +12Vdc - for UFO170

F-connector on all inputs. Simple and easy installation. The 2 outputs are equipped with auto-terminated F connector meaning that there is no need to terminate an un-used output. Including a power supply / inserter to power a UFO antenna when used in a camping-car and powered from the 12V DC delivered from the camping-car.

2 inputs, AC + DC 12V

Automatic switch from 12 VDC to 230V AC input upon availability

When connected to 230V AC, delivers 24V DC 200mA

When connected to camping-car 12V DC, delivers 12V DC 200mA

1 x RF F-connector input

2 x RF auto-terminated F-connector outputs for 2 x TV sets

Signal insertion loss: 4dB. Quick and easy installation

Install instruction already available on UFO 150/170 box and manual

Single packed in compact color retail cardboard box.

UPC 5702663392243

Brand: Starview

MS4XXPS

Power Supply for Multi Switches

18VDC F-Type Power Supply for MS4xxP series of Multiswitch / DDM8 & DDM4 +

Rated Input Voltage: 100 ~ 240 Vac

Input Current 0.5 A max. when input rated voltage and output rated load.

Rated output power: 18W Max load @ 12VDC 1amp

Short-Circuit Protection: The power supply will be auto recovered when short

circuit faults removed.

Over-Current Protection: The power supply will be auto recovered when over

current faults removed.

PSU12/1A

Power Supply 12VDC 1A DC



100-240V input Output 12VDC 1.0A Standard DC Tip **Brand: OEM**

March-23 www.digitalimports.co.nz R - Pg 1



R. Power Supplies r.1 Plug Packs



Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

PSU12/2A

Power supply 12VDC 2A DC



100-240V input Output 12VDC 2.0A Standard DC Tip Brand: OEM

PSU12/3A

Power Supply 12VDC 3A DC



100-240V input Output 12VDC 2.0A Standard DC Tip **Brand:** OEM

PSU15/3A

Power Supply 15VDC 3A DC



100-240V input Output 15VDC 3A 45W DC Tip Brand: OEM

PSU18/4A

Power Supply 18VDC 4A DC



100-240V input 18VDC 4A 72W - DC Tip Includes 230VAC D SUB Plug Leed Brand: OEM

PSU5/10W

USB 10W Power Supply



AC 100-240V Input 50/60Hz 0.6A Output 5.0V DC - 2000mA USB socket.



S. TV and Brackets

S. Television and Brackets



| Satellite Reception

Terrestrial Reception

IPT√

ishes | Amplifiers | Receive

Headends

Antennas

S. Television and Brackets

TV / BRACKETS

TV and Brackets Category Index



- S. Television and Audio
 - s.1 Domestic TV's
 - s.2 Commercial TV's
 - s.3 12V RV Televisions
 - s.4 TV Brackets

Remarks: Page 1 of 3

s.1 Domestic TV

5924/0000

TECHNIVISION HD24A - White/anthracite

Top features Brand: TechniSat



Triple tuner for receiving DVB-S/S2, DVB-C and DVB-T2 HD WLAN and Bluetooth (streaming of audio data) integrated Smart TV Portal: Access to media libraries, online video libraries, apps and HbbTV

Smart TV Portal: Access to media libraries, online video libraries, apps and HbbT Available apps: Prime Video, Netflix, YouTube, YouTube Kids and many more.

Pay TV compatible via CI+

USB recording: Recording of TV programs on external USB data carriers

Timeshift in connection with an external storage medium

Support HDR standards: HDR10 and HLG

UPC 4019588924000

s.2 Commercial TV

AA59-00818A

Samsung AJ, AE Series Remote Control-Commerical TV's

Brand: Samsung



BN59-01376A

Samsung Remote Control Modern version

Remote control for HG series TV Brand: Samsung



HG43AU800A

43-inch UHD 4K Crystall Display Commercial TV - HAU800 Series

Deliver optimized and customized guest insights with 4K UHD crystal display
Enhance content with 4K UHD Crystal Display for perfect picture quality
Slim design that complements any interior while saving space



HG75AU800

75" Samsung Luxury Hospitality UHD TV

Centralized management of hotel displays worldwide

Brand: Samsung



Size: 75"

s.3 12V RV Televisons

April-23 www.digitalimports.co.nz **S** Ph 03 344 5417 Fax 03 344 5419 **S - Pg 1**



S. TV and Brackets

s.3 12V RV Televisons



Brand: TechniSat

Terrestrial Reception | Dishes | Amplifiers | Rec

5932/0101

Technivision HD32AW Mobile TV

The name says it all: With the TECHNIVISION HD32AW MOBIL, everything revolves around maximum mobility and flexibility when watching television.

Because this HD Smart TV with a 32-inch/80 cm screen diagonal has a built-in battery that enables up to four hours of TV or streaming enjoyment without being connected to a power source. So the football game on TV can easily be moved to the terrace or in the gazebo.

And in connection with a DVB-T2 antenna, television becomes completely cablefree. The device, which weighs just over six kilograms, can be quickly stowed away in the bag supplied and can be set up again even more quickly on site. The stand is placed on the back of the device to save space.

The TECHNIVISION HD32AW MOBIL is also the perfect camping TV that can be used anywhere around the caravan.

The HD Smart TV receives programs via satellite, cable or DVB-T2 HD. Unencrypted broadcasts can be recorded on a USB data medium.

The streaming of content from media libraries and from various video-on-demand providers, such as e.g. Netflix, Amazon Prime Video or YouTube is possible. You can also pair Bluetooth output devices such as Bluetooth headphones or Bluetooth speakers with the TECHNIVISION HD32AW MOBIL.



Portable TV with a rechargeable lithium battery for mobile use

Support HDR standards: HDR10, HLG

Triple tuner for receiving DVB-S/S2, DVB-C and DVB-T2 HD

Smart TV Portal: Access to media libraries, online video libraries, apps and HbbTV Integrated WiFi

WLAN and Bluetooth (audio streaming) integrated

USB recording: Recording of TV programs on external USB data carriers

Timeshift in connection with an external storage medium

Remarks: Due QTR 2 - 2023 Size: 32 Inch

s.4 TV Brackets

2020/2761

TECHNIMOUNT FLEX

Brand: TechniSat Top features



Hole distance: VESA 100, 200, 400, 200 x 400

Weight capacity: max. 45 kg

Distance to the wall: 47 mm ... 486 mm

Wall mount 236x374mm Tilt angle: -2° ... 12°

Swivel angle: ± 60° (depending on TV size)

attached bubble level for the horizontal adjustment integrated cable routing in the articulated cantilever

Color: black


Size: 43x43x4.7cm Remarks: New product Q3 -2023 **UPC** 4019588227613

2020/2762

TECHNIMOUNT SLIM 32-65

TECHNIMOUNT SLIM is a compact wall mount for 32"- 65" LED/LCD/PDP TV sets **Brand:** TechniSat

with up to 40 kg load.



Hole distance: VESA 100, 200, 400, 200 x 400. 400 x 600

Weight capacity: max. 40 kg Distance to the wall: 22 mm

Color: black

Size: 69.5x43x2.2cm UPC 4019588227620 **Remarks:** New product due Q3 -2023

Ph 03 344 5417 Fax 03 344 5419 April-23 www.digitalimports.co.nz



S. TV and Brackets





Brand: TechniSat

tellite Reception | Terrestrial Reception Dishes | Amplifiers | Receivers

2020/2764

TECHNIMOUNT ISI

TECHNIMOUNT ISI is a compact wall mount for 22"- 42" LED/LCD/PDP TV sets with

up to 20 kg load.

Article information

EAN 4019588227644

Item no. 2020/2764

Colour black

Weight (Box) 840 g

Weight 594 g

Device (W x H x D)

23.00 x 26.00 x 5.00 cm

Box

27.00 x 16.50 x 3.00 cm

General characteristics

Hole distance

75x75, 100x100, 200x100, 200x200

Load carrying capacity

20 kg

Distance from wall

25 mm

Screen inclination

0 ... 10°

Recommended TV size

22 ... 55 in

Size: 23.00 x 26.00 x 5.00 cm **Remarks:** New Product Q3-2023 UPC 4019588227644

2020/2765

TECHNIMOUNT FLEX EASY

Top features **Brand:** TechniSat



Hole distance: VESA 100, 200, 400, 200 x 400

Weight capacity: max. 25 kg

Distance to the wall: 62 mm ... 426 mm

Tilt angle: -2° ... 12°

Swivel angle: ± 90° (depending on TV size)

attached bubble level for the horizontal adjustment integrated cable routing in the articulated cantilever

Color: black

UPC 4019588227651 **Size:** Base 79x324mm **Remarks:** New product Q3-2023

Brateck 13-27" Wall Mount Bracket - Supports 75&100mm VESA

BRATECK 13"-27" Super slim low- profile Monitor wall mount bracket. Supports VESA 75x75 & 100x100.



Max load: 30kg. Curved display compatible. Colour: Black.

UPC 3967373533412

Brand: OEM

BRK-LPA16-224

Brateck 23-42' Articulating Wall Mount

BRATECK 23"-42" Articulating monitor wall mount bracket. Max load: 30kg. Supports VESA 100x100, 200x100, 200x200. Tilt and swivel. Colour: Silver arm / black plate.



Super Slim Aluminum Full-Motion Mount

The LUMI LPA16-224 Super Slim full-motion mount places 23"-42" TVs just 27mm from the wall, yet still allows full-motion capabilities. With its cable management guide, the LPA16-224 keeps loose cables organised, creating a clean appearance without compromising TV movement. A cutting-edge gliding system makes ideal TV positioning effortless — TV can easily extend away from the wall and shift left or right on the wall plate. The LPA16-224 always has a finished appearance with a decorative cover that conceals assembly and mounting hardware.

Ph 03 344 5417 Fax 03 344 5419 April-23 www.digitalimports.co.nz



S. TV and Brackets

s.4 TV Brackets

300x300,400x200,400x400. Profile: 34-268mm. Curved display compatible. Colour:



tellite Reception | Terrestrial Reception

IPTV | Dishes | Amplifiers | Receivers

| Antennas |

BRATECK 32'-55' Articulating Wall Mount Bracket BRATECK 32"-55" Articulating wall mount bracket. Max load: 30Kg. VESA:

Brand: OEM

Brand: OEM



23"-55" Full Motion TV Wall Mount Ext 49-615mm **BRK50-443AL**

Silver arm / black plate.

BRATECK 23"-55" Full motion TV wall mount bracket. Extend, tilt and swivel.

VESA Support up to: 400x400 Max load: 35kg. Profile: 49-615mm.

Hidden cable management.

Colour: Black.

Size: 435 x 435 x 615mm Remarks: 23"~55"

S - Pg 4 April-23 www.digitalimports.co.nz Ph 03 344 5417 Fax 03 344 5419



Kingray

T. Kingray T. Kingray




Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

T. Kingray

KINGRAY

Kingray Category Index



t.8 Kingray Fibre

t.8.1 Fibre Cables t.8.4 Splitters

t.8.5 Accessories

Remarks: Page 1 of 14

t.4 Power Supplies

PSK01

Power Supply, With Belling Lee Injector, 9VDC 200mA

Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

Operating Voltage 230 -240 VAC Output Voltage 9 VDC 200 mA

UPC 9319493048484

Brand: Kingray

Brand: Kingray

PSK02

Power Supply, With Belling Lee Injector, 22VAC 100mA

Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

Operating Voltage 230 -240 VAC Output Voltage 22 VAC 100 mA

UPC 9319493022712

PSK06

Power Supply, With Belling Lee Injector, 14VDC 150mA

Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

Operating Voltage 230 -240 VAC Output Voltage 14 VDC 150 mA Brand: Kingray



Power Supply, With F Type Injector, 14VDC 100mA

Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

Operating Voltage 230 -240 VAC Output Voltage 14 VDC 100 mA **Brand:** Kingray



Power Supply, With DC Plug, 14VDC 100mA

Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

2.5mm DC Plug

Operating Voltage 230 -240 VAC Output Voltage 14 VDC 100 mA

Brand: Kingray

PSK08

Power Supply, With Belling Lee Injector, 17.5VAC 100mA

Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

Operating Voltage 230 -240 VAC Output Voltage 17.5 VAC 100 mA Brand: Kingray

UPC 9319493165419

UPC 9319493085533



T. Kingray t.4 Power Supplies



PSK08F

Power Supply, With F Type Injector, 17.5VAC 100mA



Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

Operating Voltage 230 -240 VAC Output Voltage 17.5 VAC 100 mA

UPC 9319493111492

Brand: Kingray

PSK12F

Power Supply, With F Type Injector, 12VDC 500mA



Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

Operating Voltage 230 -240 VDC Output Voltage 12 VDC 500mA

Brand: Kingray

UPC 9319493137959

Power Supply, With DC Plug, 12VDC 500mA



Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

2.5mm DC Plug Operating Voltage 230 -240 VAC **Brand:** Kingray

Output Voltage 12 VDC 500mA

UPC 9319493100823

Power Supply, With F Type Injector, 18VDC 500mA



Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

Operating Voltage 230 -240 VAC Output Voltage 18 VDC 500 mA

Brand: Kingray

PSK18KI

Power Supply, With DC Plug, 15VDC 1.7 A



GME Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

2.5mm DC Plug

Operating Voltage 230 -240 VAC Output Voltage 15 VDC 1.7 A

Brand: Kingray

UPC 9319493092845

PSK189

Power Supply, With DC Plug, 18VDC 500mA



Kingray's power supplies have constantly maintained their reputation as the highest quality and most reliable power supplies to the antenna industry. They feature posistor protection circuitry and fully comply with Australian and New Zealand Energy Standards.

2.5mm DC Plug

Operating Voltage 230 -240 VAC Output Voltage 18 VDC 500 mA

Brand: Kingray

Brand: Kingray

t.5 Leads and Accessories

ADC322

DC Power Lead 30cm 2 way



The ADC322 allows you to power two devices from the one power supply. 2.5mm DC Plug

t.6 Cat TV



T. Kingray



Brand: Kingray

Amplifiers | Receive CAT01 High output CAT5 to RF distribution amplifier A new way to think about RF distribution **Brand:** Kingray The CAT01 is a high output distribution amplifier, capable of supplying quality signal to up to four television receivers. The CAT01 amplifier incorporates master gain and tilt controls, plus individual gain controls for each outlet, delivering a balanced output level regardless of cable lengths. Available separately is the Kingray KLE02 impedance matching balun cable for connection between the RJ45 wall outlet and the television ensuring optimal performance at all times. Frequency Range 47-862 MHz Maximum Gain 35 dB Gain Control Range Overall 20 db, Output 20dB Maximum Output Level 98 dB (42 Channel Cenelec) Minimum Input Level 63dBuV Noise Figure < 8 dB Tilt Control 15dB Return Loss >13dB Isolation>20 dB (port to port) Test Point -20 dB Input Connector F type Output Connector RJ45 19' Rack Mountable Yes, using KB02 UPC 9319493235396 **KB02** 19" mounting bracket to suit CAT01 The KB02 is a 19" inch bracket to suit CAT01, it is capable of housing two CAT01. **Brand:** Kingray It is supplied with one blanking plate. KLE02 **Balun transformer cable** This balun cable converts the CAT RF system back to coax at the TV end of the **Brand:** Kingray system. UPC 9319493235709 t.8.1 Fibre Cables **KLE011** 0.5m Optical Fibre Single Mode Patch Lead, SC/APC to SC/PC, Single Mode Patch lead **Brand:** Kingray one end & an SC/APC connector on the other end. Low smoke zero halogen 3.0mm PVC jacket.

1.0m Optical Fibre Single Mode Patch Lead, SC/APC to SC/APC

Size: 0.5M

Size: 1M

KLE012



T. Kingray t.8.1 Fibre Cables



Satellite Reception	t.8.1 FIDTE Cables Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
KLE013	1.0m Optical Fibre Single Mode Patch Lead, SC/APC to SC/PC	
	Cinc. AM	Brand: Kingray
KLE014	1.5m Optical Fibre Single Mode Patch Lead, SC/APC to SC/APC	
RLEU14	Size: 1.5M	Brand: Kingray
KLE015	1.5m Optical Fibre Single Mode Patch Lead, SC/APC to SC/PC	
	Size: 1.5M	Brand: Kingray
KLE100MSC	100m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
	Size: 100M	Brand: Kingray
KLE10MSC	10m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
		Brand: Kingray
KLE15MSC	Size: 10M 15m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
KEE 13.VISC	ISIII Optical Fibre Leau, SCIAFC to SCIAFC SWI Leau	Brand: Kingray
	Size: 15M	
KLE20MSC	20m Optical Fibre Lead, SC/APC to SC/APC SM Lead	Brand: Kingray
் ந	Size: 20M	
KLE25MSC	25m Optical Fibre Lead, SC/APC to SC/APC SM Lead	Brand: Kingray
	Size: 25M	



T. Kingray t.8.1 Fibre Cables



Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
KLE30MSC	30m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
		Brand: Kingray
KLE35MSC	Size: 30M 35m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
REESSINSC	Size: 35M	Brand: Kingray
KLE40MSC	40m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
REL-JOHNSC	Size: 40M	Brand: Kingray
KLE45MSC	45m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
	Size: 45M	Brand: Kingray
KLE50MSC	50m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
	Size: 50M	Brand: Kingray
KLE60MSC	60m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
		Brand: Kingray
	Size: 60M	
KLE70MSC	70m Optical Fibre Lead, SC/APC to SC/APC SM Lead	Brand: Kingray
	Size: 70M	
KLE80MSC	80m Optical Fibre Lead, SC/APC to SC/APC SM Lead	
		Brand: Kingray
	Size: 80M	



T. Kingray t.8.1 Fibre Cables



Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

KLE90MSC

90m Optical Fibre Lead, SC/APC to SC/APC SM Lead

Brand: Kingray

Brand: Kingray

Brand: Kingray

Brand: Kingray

Brand: Kingray



Size: 90M

t.8.4 Splitters

KPLC104

4 Way PLC Splitter - 19" Rack Mount

This 4 Way Planar Optical Waveguide Optical Splitter (PLC Splitter) is an integration waveguide optical power distribution device that is based on quartz substrate, has a wide working wavelength range, high reliability and excellent uniformity of optical split. It is especially suitable for connecting a local unit with a terminal unit in passive optical networks (EPON, BPON, GPON, etc.) to achieve optical signal splitting.

The main design divides optical signals in optical communication systems into multi-way output.

KPLC108

8 Way PLC Splitter - 19" Rack Mount

This 8 Way Planar Optical Waveguide Optical Splitter (PLC Splitter) is an integration waveguide optical power distribution device that is based on quartz substrate, has a wide working wavelength range, high reliability and excellent uniformity of optical split. It is especially suitable for connecting a local unit with a terminal unit in passive optical networks (EPON, BPON, GPON, etc.) to achieve optical signal splitting.

The main design divides optical signals in optical communication systems into multi-way output.

KPLC116

KPLC132

16 Way PLC Splitter SC/APC

Key Features 1 in 16 Out Optical Splitter

Optical Wavelength: 1260nm~1650nm Maximum Insertion Loss: 13.9dB

Return Loss >55dB

Low insertion loss, high uniformity

Low polarization loss

Wide working wavelength range High stability and reliability Size: 1RU, 19" Rack Mountable

Connections: SC/APC

In the box

32 Way PLC Splitter SC/APC

1 in 32 Out Optical Splitter

Optical Wavelength: 1260nm~1650nm Maximum Insertion Loss: 17.2dB

Return Loss >55dB

Low insertion loss, high uniformity

Low polarization loss

Wide working wavelength range High stability and reliability Size: 1RU, 19" Rack Mountable

Connections: SC/APC
In the hox
Size: 1RU - 19 Rackmount

t.8.5 Accessories

Remarks: 1RU - 19" Rack



T. Kingray t.8.5 Accessories



Amplifiers **Optical Attenuator 10dB Male to Female** KOATT10DI 10dBm SC Single Mode Male to Female Attenuator. Designed to attenuate the **Brand:** Kingray optical fibre wavelength (1260~1620) in a stable & desired level without any changes to the original transmission wave. Remarks: 10db **KOATT1DB Optical Attenuator 1dB Male to Female** 1dBm SC Single Mode Male to Female Attenuator. Designed to attenuate the Brand: Kingray optical fibre wavelength (1260~1620) in a stable & desired level without any changes to the original transmission wave. Remarks: 1db **KOATT2DE Optical Attenuator 2dB Male to Female** 2dBm SC Single Mode Male to Female Attenuator. Designed to attenuate the **Brand:** Kingray optical fibre wavelength (1260~1620) in a stable & desired level without any changes to the original transmission wave. Remarks: 2db **KOATT5DE Optical Attenuator 5dB Male to Female** 5dBm SC Single Mode Male to Female Attenuator. Designed to attenuate the Brand: Kingray optical fibre wavelength (1260~1620) in a stable & desired level without any changes to the original transmission wave. Remarks: 5db



U. Data - WiFi Solutions



| Satellite Reception | Terrestrial Reception

IPTV

shes | Amplifiers | Receiv

Headend

Antennas

U. Data - WiFi Solutions

DATA - WiFi

Data - WiFi Solutions Category Index



U. Data - WiFi Solutions

- u.1 Controllers
- u.2 Endpoints / Access points
- u.3 Accessories

Remarks: Page 1 of 4

u.1 Controllers

383104

EoC Controller 32/2 B - With WiFi License Key pre-loaded

The EoC controller is used as the main unit to control up to 32 endpoints in an EoC system. The controller acts as both an L2 switch for ethernet and as a media converter from ethernet to coax and back to ethernet, allowing both TV and data signals to use the same coax cable. Provided that G.hn and TV signals are controlled within the frequency ranges mentioned below.

Brand: Triax



Main features:

G.hn for data on 1...200 MHz

TV on 300...862 MHz

4x ethernet port

Combining up to 32 EP's on same COAX

2x coax EoC out ports, supports port bundling

1x coax TV in port

Supports VLAN tagging

Status LED's + reset button on front

WIFI License Key Preloaded

Size: 45x220x430 mm

Remarks: Verison 2 32 Way

383106

EoC Controller 32 EP B, Media Convertor Only

The EoC controller is used as the main unit to control up to 32 endpoints in an EoC system. The controller acts as both an L2 switch for ethernet and as a media converter from ethernet to coax and back to ethernet, allowing both TV and data signals to use the same coax cable. Provided that G.hn and TV signals are controlled within the frequency ranges mentioned below.

Brand: Triax



Main features:

G.hn for data on 1...200 MHz

TV on 300...862 MHz

4x ethernet port

Combining up to 32 EP's on same COAX

2x coax EoC out ports, supports port bundling

1x coax TV in port

Supports VLAN tagging

Status LED's + reset button on front

Project Pricing Available

To add Wifi support use code 383600

Size: 45x220x430 mm **Remarks:** For Media Convertor system only





Brand: Triax

QTY'S 10+,30+

Bulk Qty Available: 🔰

u.1 Controllers

ellite Reception | Terrestrial Receptior **EoC Controller 64 EP B, Media Convertor only** 383107 EoC controller (64 B) **Brand:** Triax The EoC controller is used as the main unit to control up to 64 endpoints in an EoC system. The controller acts as both an L2 switch for ethernet and as a media converter from ethernet to coax and back to ethernet, allowing both TV and data signals to use the same coax cable. Provided that G.hn and TV signals are controlled within the frequency ranges mentioned below. Combining of up to 64 Endpoints is possible on same COAX. Main features: G.hn for data on 1-200 MHz TV on 300-862 MHz 4x ethernet port Combining up to 64 EP's on same COAX 4x coax EoC out ports, supports port bundling 1x coax TV in port Supports VLAN tagging Status LED's + reset button on front Project Pricing Available. To add Wifi support use code 383600 **Size:** 45x220x430 mm Remarks: For media convertors only **EoC Network Analyser Kit EoC Network Analyser Kit Brand:** Triax **Size:** 110x390x300 mm UPC 5702663832602 **WiFi License Key for EoC Controllers** License to provide WiFi Support on EoC Controllers not including WIFI license Key **Brand:** Triax Allows system to use EPC and EPE endpoints. Remarks: Needed to support wifi on EoC u.2 Endpoints / Access Points

383200

End Point Coax (EPC), WiFi/EoC, AC

EoC pro End Point (EPC)

The EoC endpoint with WiFi enables WiFi coverage via coax cables. The endpoint is the last element in a system with an EoC controller, splitting your TV and data signals into WiFi/ethernet for data and coax for TV.

Main features

G.hn for data on 1-200 MHz TV on 300-862 MHz WiFi 802.11ac wave 2 1x ethernet port Supports VLAN tagging

Bulk QTY Project pricing available

Size: 3,7 x 11,9 x 18,5 mm **Remarks:** Wall Mount - Project / Bulk pricing available

March-23 www.digitalimports.co.nz U Ph 03 344 5417 Fax 03 344 5419 U - **Pg 2**



u.2 Endpoints / Access Points



Ethernet WiFi Endpoint with PoE (EPE)

The Ethernet WiFi Endpoint (EPE) with dual band concurrent Wi-Fi, is used in conjunction with the Triax Ethernet over Coax Controller (EoC) and is intended to provide Wi-Fi access in rooms without Coax cables. This is often the case for rooms such as conference rooms, corridors, lobbies, bars, etc.

Brand: Triax

Bulk Qty Available: **Y** QTY'S 10+,30+

The PoE Access Point is powered via Ethernet (PoE) to make the installation easy and independent of a power outlet. This will require the installation of a e PoE+compliant Ethernet switch connected to the EoC Controller.

The PoE Access Point also has a PoE output (passthrough) to supply power to other PoE devices. This could be a 2nd PoE Access Point, an IP phone, a Camera or other devices in the same room.

If the PoE output is not used, the AP can be switched to power save mode to accept a reduced PoE input power.

Main features 2,4 GHZ Wi-Fi - 802.11b/g/n MIMO 5 GHz Wi-Fi - 802.11ac MU-MIMO 2x Ethernet port PoE input: PoE-in 802.3af / PoE+in 802.3at

PoE output: PoE-out 802.3af

VLAN support Layer 2 Isolation

Bulk QTY Project pricing available

Size: 3,7 x 11,9 x 18,5 mm **Remarks:** Excludes PSU - Required 14V Supply

383235 EoC MediaConverter MC1

EoC MediaConverter - COAX to 1Gbps IP network

Watch IPTV services through the new TRIAX EoC MediaConverter Installation cost is kept to a minimum as existing cables can be reused to add reliable

1Gbps IP network services.

Small footprint, and easy to mount behind TV set.

Powered by the TV set.

Very easy cabling to all major brands of TV sets.

Bulk QTY Rate Available for Project Pricing

Requires USB C Cable - Not Supplied.

Size: 20x80x80mm Remarks: EPC - Gigabit

Brand: Triax

Bulk Qty Available: **QTY'S** 10+,30+

u.3 Accessories

EPE - 14V PSU for Eoc System

PSU for EPE - Ethernet only endpoints, Supports the POE function of the Ethernet WiFi points

5-200 MHz EoC return path filter

The return path filter is used to bypass amplifiers in a normal coax based TV network on the data frequency of EoC. This allows the data to have a return path and the TV signal to be amplified.

Brand: Triax

Return path 1...200 MHz – no amplification To amplifier 300...862 MHz

10 amplifier 300...862 MHZ

UPC 5702663839007







u.3 Accessories

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas |

BEOC HP Filter 258MHz F

EoC HP Filter 258MHz F

Filter is used to stop low band frequencies, intefering with the EoC datastream. Highpass filter allows frequencies between 258...2400Mhz to pass.

UPC 5702663839014



V. Alternative Power

V. Alternative Power



ellite Reception | Terrestrial Reception

Brand: Victron Energy

V. Alternative Power

ALT POWER

Alternative Power Category Index

Alternative Power Solutions

- V. Alternative Power
 - v.2 Solar Controlers
 - v.5 Battery Monitor Equipment
 - v.7 Electric Vehicle Chargers

Remarks: Page 1 of 4

v.2 Solar Controlers

MPPT30A

MPPT 30amp 12/24 Volt Solar Controller - Max 100VDC

SPECIFICATIONS

Battery voltage: 12V/24V (auto detect)

Maximum PV Open-circuit Voltage (Voc): 100V Max

Rated PV Size: 390W/780W Max PV Size: 2040W Maximum PV Current: 30A Maximum charging Current: 30A Maximum Load Current: 30A Working temperature: -20 ~ +45C

Weight: 1.2 kg

Dimensions: 228 mm × 164 mm × 55 mm

2 year warranty

MT50

Remote for Tracer MPPT Solar Controllers

Large-screen multifunction LCD displays all the operational data and system working status in digital, graphic and textual forms

·With six navigation function keys, the operation is direct, convenient and rapid

·Real-time energy statistics recording

·Both data and data flowing on the same lead ,no need for external power

·Real-time monitoring and acoustic alarm of failure information of the controller More powerful function Via MT50

·Diversified load control modes: manual, light ON/OFF, Light ON+ Timer, Time Control

·Battery type selection: Gel, sealed, flooded and USER type


·Real-time monitor

·Programmable parameters

·Energy display function

Connection cable length: 2m Dimensions: 114mm x 114mm

24 month warranty





SHU050150050

Smart Shunt 500A/50mV

The SmartShunt is an all in one battery monitor, only without a display. Your phone acts as the display. The SmartShunt connects via Bluetooth to the VictronConnect App on your phone (or tablet) and you can conveniently read out all monitored battery parameters, like state of charge, time to go, historical information and much more.



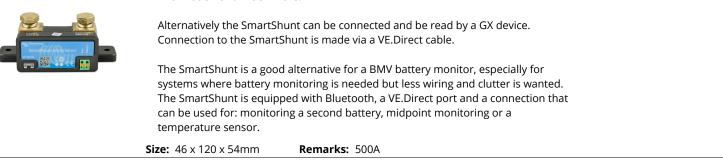





V. Alternative Power

v.7 Electric Vehicle



Satellite Reception | Terrestrial Reception

DTV | Dieber

es | Amplifiers | Receive

Headends

Brand: TechniVolt

Antennas

v.7 Electric Vehicle

0000/6301

TECHNIVOLT 1100 SMART

Type 2 charging plug

The TECHNIVOLT 1100 SMART has a type 2 charging cable permanently integrated into the charging station. The vast majority of e-cars in Europe can be charged with this, since the type 2 plug is now the European standard. Energy management

The TECHNIVOLT 1100 SMART can be integrated into an energy management system, e.g. a compatible photovoltaic system (PV system) can be integrated using the EEBUS protocol via LAN in order to charge an electric vehicle if there is excess PV. If the PV system generates more electricity than is consumed in the household, charge your electric car for free with excess PV.

Energy meter

Kilowatt hours can be billed using the integrated MID-certified meter and shown on the integrated display on the charging station. Ideal to bill the company cars of employees or the vehicles of tenants for a fee.
Plug & Charge ISO 15118

Plug & Charge according to ISO 15118 enables the secure authentication of your vehicle for the charging process without additional charging authorization, e.g. by an RFID card. The charging station automatically detects the compatible electric car when it is connected via the charging cable - the charging process can start immediately and conveniently.



0000/6400

TECHNIVOLT 100

Type 2 charging socket

The TECHNIVOLT 100 is equipped with a Type 2 charging socket. Use a Type 2 charging cable to charge the vast majority of e-cars in Europe. The Type 2 plug is now the European standard.

UPC 4019588064003

Brand: Telestar

Brand: TechniVolt

100-300-0

EC 311 S - EV Charger 11KW/16A

Three-phase, 11kW/16A charging station for electric and hybrid vehicles featuring IEC 62196-2 type 2 charging socket.

The TELESTAR EC 311 S is a three-phase charging station. It is suitable for charging electric and or hybrid vehicle featuring a maximum output of 11KW at 16A. The charging process is controlled via and displayed on a 3.5" LCD color display (touch screen) and can also be monitored and controlled via smart phone application (free to download for iOS & Android). The EC 311 S' small yet elegant housing is heat-resistant and meets the requirements of protection class IP 66 making it fit for indoor and outdoor installation.

Coming late 2023 - Not yet Priced.

Remarks: 7 Kw Single Phase





V. Alternative Power

v.7 Electric Vehicle



Brand: Telestar

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

100-300-1

EC 311 S6 EV Charger 11Kw/16A

Three-phase, 11kW/16A charging station for electric and hybrid vehicles featuring 6m charging cable with type 2 connector.



The TELESTAR EC 311 S6 is a three-phase charging station featuring a charging cable (length 6m) with type 2 connector. It is suitable for charging electric and or hybrid vehicle featuring a maximum output of 11KW at 16A. The charging process is controlled via and displayed on a 3.5" LCD color display (touch screen) and can also be monitored and controlled via smart phone application (free to download for iOS & Android). The EC 311 S6 small yet elegant housing is heat-resistant and meets the requirements of protection class IP 66 making it fit for indoor and outdoor installation.

Coming late 2023 - Not Yet Priced

Remarks: 7Kw Single Phase



Y. Audio Hi-Fi

and Hi Fi TechniSat

Satellite Reception | Terrestrial Reception

| Dishes | Amplifiers


Headend

Antennas

Y. Audio Hi-Fi

Audio Hi-Fi

Audio and Hi-Fi Category Index





- y.2 Portable Speaker
- y.3 Revo Brand
- y.4 TechiSat Brand
- s.5 Telestar Brand

Remarks: Page 1 of 8

y.1 Imperial

22-238-00

DABMAN i205 CD -Wood

Hybrid stereo radio featuring DAB+, FM and web radio reception, featuring CD player, Bluetooth 5.0, UPnP as well as a variety of music streaming options and many user-friendly features.

Brand: Imperial



A highly versatile digital companion: The IMPERIAL DABMAN i205 CD combines the features of a DAB+ and FM radio with the huge possibilities of web radio, CD playback, music streaming access and home networking. Being capable of receiving digital and analogue radio signals via DAB+ and FM as well as web radio stations, the DABMAN i205 CD may also play back music CDs and it can be connected to mobile devices via Bluetooth 5.0 and UPnP. A wide range of features such as multilingual OSD menu, plug & play installation, time display, multilingual menu and alarm clock mode featuring sleep timer top off the list of useful functions, making the versatile IMPERIAL DABMAN i205 CD one of the best hybrid radios in its class.

UPC 4024035238005

22-240-00

DABMAN i400

Small-sized hybrid radio adapter (suitable for DAB+, FM & web radio) featuring 3.2" (8,1cm) colour display, Bluetooth 3.0 as well as UPnP/DLNA support and many user-friendly features.

Brand: Imperial



The small-sized IMPERIAL DABMAN i400 combines the features of a DAB+ and FM radio with the huge possibilities of an internet radio and home networking device. This device offers all three radio technologies plus a variety of additional features wrapped up in an extremely small-sized housing - the ideal solution to bring your HiFi system to the next level. Being capable of receiving digital and analogue radio signals via DAB+ and FM as well as internet radio stations, the DABMAN i400 may also be connected to mobile devices via Bluetooth or UPnP in order to play back music files from smart phones or external storage devices. Another plus: thanks to its WiFi capability, the DABMAN i400 may be used as a "nerve centre" for multiroom operation, bringing your favourite music to every room in your house. The DABMAN i400 may be easily operated via remote control or via smart phone/tablet by unsing the free application (iOS and Android supported). In sum: the DABMAN i400 is the ideal solution for upgrading your HiFi set to a full-scale audio entertainment centre.

UPC 4024035222400



TechniSat

y.1 Imperial

| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

22-248-00

IMPERIAL DABMAN i450 CD

Hybrid stereo radio featuring DAB+, FM and internet radio reception, CD player, Bluetooth/DLNA/UPnP support and many user-friendly features.

The IMPERIAL DABMAN i450 CD is one of TELESTAR's cutting-edge digital radio all-rounders: the hybrid radio receives both digital DAB+ and analogue FM radio signals and may provide you with access to more than 25.000 web radio stations. Another plus: a wide range of music streaming services is supported as well.It also features a CD drive to play back music from audio and MP3 CDs. Two 3" speakers and subwoofer ensure a great stereo sound experience, which, thanks to the internal equalizer, may be adjusted to individual preferences. The 2.8" TFT color displays provides you with useful background information (e.g. song title, time, weather information), many features such as alarm clock mode, UPnP or USB MP3 play back mode round off the DABMAN i450's portfolio of functions. The trick with the DABMAN i450 CD: it is prepared for undermount installation and therefor ideally suited to be used as kitchen radio.

Brand: Imperial

UPC 4024035248004

22-253-00

DABMAN i510 BT

Hybrid radio element for HiFi systems, featuring Bluetooth support as well as a variety of streaming and multimedia options.

The IMPERIAL DABMAN i510 BT combines the features of a DAB+ and FM radio with the huge possibilities of a web radio and home networking device. This device offers all three radio technologies plus a variety of additional features wrapped up in a 43cm HIFI case - the ideal component to bring your HiFi system to the next level. Being capable of receiving digital and analogue radio signals via DAB+ and FM as well as internet radio stations, the DABMAN i510 BT may also be connected to mobile devices via Bluetooth and UPnP in order to play back music files from smart phones or external storage devices. Speaking of music: the i510 BT supports a variety of web music streaming services. Additionally, an extensive USB media feature supports playing back several types of media from as well as recording radio streams on USB storage devices. It may be easily operated via remote control or via smart phone/tablet by unsing the free application (iOS and Android

Brand: Imperial



UPC 4024035002538

22-254-00

DABMAN i560 CD

All-In-One HiFi system featuring amplifier, CD Player, Bluetooth transceiver & DLNA/UPnP support as well as a variety of music playback and streaming options.

supported). In sum: the DABMAN i510 BT is the ideal solution for upgrading your

HiFi set to a full-scale 21st century audio entertainment centre.

Brand: Imperial



The IMPERIAL DABMAN i550 CD is a full scale all-in-one HiFi system. Its high-quality and elegant chassis in "classic" 17" dimensions accommodates everything you need if you are looking for a sophisticated HiFi system: DAB+ digital, analogue FM as well as web radio, CD & network player, a large portfolio of music streaming services, Bluetooth, WiFi etc. - it is easier to list the features, that the DABMAN i550 CD lacks. The internal amplifier creates a solid, natural sound and offers sufficient reserves. The system's high variety of connections offers maximum versatility. It may be easily operated via remote control or via smart phone/tablet by unsing the free application (iOS and Android supported).

UPC 4024035254005

y.2 Portable Speaker



TechniSat

y.2 Portable Speaker

Satellite Reception	y.2 FOR IDDIE Speaker Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
0000/9117	Loudspeakers = Stereo speakers Output performance = 2 x 8 W Frequency response = 60 - 20000 Hz Audio in/AUX in Micro USB microSD card Bluetooth 4.0 - HSP , HFP , A2DP, AVRCP NFC Rechargeable battery = 2000 mAh Battery life = 7 h Battery charge time = 2.5 h Incredible sound from such a small portable speaker. TechniSat German Quality	Brand: TechniSat
	Size: 206 x 64 x 60mm	UPC 4019588091177
0000/9118	BLUSPEAKER TWS Dark Grey	
0000/9118	Portable Speaker with TWS - Tru Wireless Stereo - When connected with a second speaker Bluetooth Version & Profile 4.2 HSP (Headset Profile) HFP (Hands Free Profile) A2DP (Advanced Audio Distribution Profile) AVRCP (Audio Video Remote Control Profile) Connections Micro USB ,Audio in/AUX in Loudspeakers Stereo speakers Output performance 2 x 5 W Frequency response 100 - 18000 Hz Power supply Rechargeable battery 2200 mAh Battery life 6-10 h Battery charge time 5 h Nominal voltage 230 V	Brand: TechniSat
	Size: 7.50 x 21.00 x 7.00 cm	UPC 4019588091184
0000/9119	BLUSPEAKER TWS XL	
	Loudspeakers =Stereo speakers Output performance =2 x 15 W Frequency response =60 - 18000 Hz Audio in/AUX in Bluetooth 4.2 - HSP , HFP , A2DP, AVRCP NFC True Wireless Stereo (TWS) when paired with another TWS XL Rechargeable battery =2200 mAh Battery life =9 h Battery charge time =4.5 h	Brand: TechniSat
	Amazing sound - Quiality Brand, You have to hear this to believe it :) Size: $270 \times 150 \times 80 \text{ mm}$	UPC 4019588091191
L	5.12. 2.0 X 150 X 00 Hilli	

y.3 Revo

TechniSat

Brand: Revo

y.3 Revo

Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

641143

REVO SuperConnect Stereo - Walnut-Silver

High quality hybrid radio featuring radio triple tuner, Bluetooth and music streaming support

SuperConnect is the ultimate expression of REVO's design and engineering philosophy, and the culmination of everything we have learnt in 10 years of award-winning product design and development. Functionalism meets craft and technology, a next-generation audio device that beats at the heart of your musical ecosystem, providing whatever soundtrack you need. Radio from around the globe, access to your personal music collection or an almost limitless supply of songs from the world's leading music streaming service.



SuperConnect is equipped to receive a wide range of digital radio standards including DAB, DAB+, FM with RDS and wi-fi internet radio – providing access to over 16,000 stations from around the world. But the music doesn't stop there – SuperConnect's ability to communicate with external devices and services is unrivalled. DLNA and WLAN technology enables wireless audio playback from external computers and music servers, Bluetooth® with aptX® delivers CD quality streaming from smartphones, tablets etc., and Spotify Connect completes the proposition by unlocking over 20 million tracks from the Spotify archive.

SuperConnect is crafted using the finest materials and components, its all-wood cabinet with anodised aluminium and mild-steel facia and backplate compliment its advanced electronics beautifully. A detailed graphical OLED display and joystick control add a touch of modernity, while patented audio electronics and driver technology deliver 15W of clear digital audio with clarity and deep, rich bass.

UPC 4024035411439

Brand: Revo

641184

Revo SuperSystem - Black

High quality sound system featuring radio triple tuner, Bluetooth and music streaming support in noble appearance

The flagship model in the Revo SuperSeries range, SuperSystem is a thoroughly modern music system, combining traditional values of craftsmanship and material integrity with next-generation all-digital technology, superlative room-filling acoustic performance and award-winning industrial design.

SuperSystem beats at the heart of your musical ecosystem, providing whatever soundtrack you need, whenever and wherever you want it.

Radio from around the globe, access to your personal music collection or an almost limitless supply of songs from the world's leading music streaming service. Thanks to the inclusion of UNDOK technology, the radio is remotely controllable via an App for iOS or Android devices.



SuperSystem is equipped to receive a wide range of digital radio standards including DAB, DAB+, FM with RDS and wi-fi internet radio – providing access to over 24,000 stations from around the world. But the music doesn't stop there – SuperSystem's ability to communicate with external devices and services is unrivalled. Network audio and WLAN technology enables wireless audio playback from external computers and music servers, Bluetooth® with aptX® delivers CD quality streaming from smartphones, tablets etc., and Spotify Connect completes the proposition by unlocking over 30 million tracks from the Spotify archive.

SuperSystem is crafted using the finest materials and components, its all-wood cabinet with anodised aluminium and mild-steel facia and backplate compliment its advanced electronics beautifully. A detailed graphical OLED display and joystick control add a touch of modernity, while twin 3.5" BMR speaker drivers and integrated active subwoofer deliver 80 Watts of clear room-filling digital audio with pin-sharp clarity and deep, satisfying bass.

High quality sound system featuring radio triple tuner, Bluetooth and music streaming support in noble appearance

UPC 5060136411847





TechniSat

Brand: Revo

y.3 Revo

| Satellite Reception | Terrestrial Reception | IPTV | Dishes | Amplifiers | Receivers | Headends | Antennas

Revo SuperCD Walnut-Silver

Deluxe Digital Music System with CD and Wireless Multiroom capabilities featuring triple tuner, Bluetooth and DLNA as well as App control

Being the newest member of the SuperSeries range, SuperCD is a cutting-edge music system, combining Revo's traditional values of craftsmanship and material integrity with next-generation all-digital technology, high class acoustic performance a variety of features and award-winning industrial design.

SuperCD brings you the music you want in the highest quality possible.

Radio from around the globe, access to your personal music collection or an almost limitless supply of songs from the world's leading music streaming service. Thanks to the inclusion of UNDOK technology, the radio can be remotely controlled via an App for iOS or Android devices.



SuperCD is crafted using the finest materials and components, its all-wood cabinet with anodised aluminium and mild-steel facia and backplate compliment its advanced electronics beautifully. A detailed graphical OLED display and joystick control add a touch of modernity, while twin 4" BMR speaker drivers and integrated active subwoofer deliver 40 Watts of clear room-filling digital audio with pin-sharp clarity and deep, satisfying bass.

UPC 5060136411908

Brand: TechniSat

Y - Pg 5

y.4 TechniSat

0000/2945 DIGITRADIO 143

Top features:
Hifi Radio Component
DAB+ digital radio

FM radio (with RDS and PLL) Limitless range of music via Internet radio

TFT colour display (3.2")

Audio streaming (Spotify, UPnP, Bluetooth)

Control via app

USB charging / playback

Integrated Wi-Fi connectivity

Size: 500 x 340 x 130mm **UPC** 4019588029453

0000/3931

TECHNIRADIO Solar

Top features Brand: TechniSat

DAB+ digital radio FM radio with RDS

Favourites memory slots (10 DAB+/10 FM)

Dot matrix LCD display

sleep function

Integrated rechargeable battery for up to 10 hours of listening pleasure

Battery can be charged using a solar panel

IPX5 UPC 4019588039315

April-23 www.digitalimports.co.nz Y Ph 03 344 5417 Fax 03 344 5419



TechniSat

y.4 TechniSat

Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
0000/3938	DIGITRADIO 451 CD IR -Wood	
	Top features	Brand: TechniSat
	DAB+ digital radio FM radio with RDS and PLL Limitless choice of music via Internet radio TFT colour display (2,4") Audio streaming (Spotify, Bluetooth) USB interface with charging function and MP3 playback CD player with MP3 function Integrated Wi-Fi connectivity Clock from Network Remote Control & APP based remote control option	
	Size: 375 x 150 x 210mm	UPC 4019588039384
0000/3950	DIGITRADIO 585	
	DIGITRADIO 585	Brand: TechniSat
Trabelal Status a profit or Note to the control of	FM Internet Radio CD Player with MP3 Spotify Free Wireless Charging Works with Alexa Voice Control Alarm Clock Remote Control USB Charging	UPC 4019588039506
0000/3954	DIGITRADIO 380 CD IR	
	Top features	Brand: TechniSat
	DAB+ digital radio FM radio (with RDS and PLL) Limitless music variety via Internet radio Audio streaming (Spotif, Bluetooth) TFT colour display (2.4") Favourites memory (20 for DAB+ and 20 for FM) CD player with MP3 playback USB interface with charging function and mp3 playback Control via the TechniSat CONNECT app (iOS, Android)	UPC 4019588039544
0000/3962	TECHNIRADIO 6 S IR	
The control of the co	DAB+ digital radio RDS FM radio Favourite memory slots (20 FM / 20 DAB / 20 IR) Date and time display Snooze and sleep function TFT colour display (2.4") Internet radio via WLAN Bluetooth audio streaming (reception) Mains and rechargeable battery operated	Brand: TechniSat UPC 4019588039629



TechniSat

UPC 4019588239388

y.4 TechniSat

Terrestrial Reception | Dishes | Amplifiers | Receivers | 0000/9224 **Technipad Pro 24** Professional touch display, running Andriod, Windows options available for extra **Brand:** TechniSat **TOP FEATURES** Multitouch-Display 1920x1080 Pixel Quad-Core-Processor Cortex A9 16 GB internal memory (expandable microSD 64 GB) / 2 GB Working Memory USB x 2 Android 6.0 operating system, WLAN, Bluetooth 4.0, HDMI-In, HDMI Out Wireless image and video transmission for compatible TV TechniSat Screen resolution (pixels): 1920 x 1080 Pixel Screen diagonal: 81 cm TFT LCD Display 16:9, Screen diagonal 61cm refresh frequency rate (default): 74 Hz Internal Stereo Speaker WALL BRACKET VESA wall mounting standards: VESA 400 x 300 230VAC Power Supply **SUPPORTED FORMATS & CODECS** Video-Formats: MKV, MP4, MOV, MPG, TS, RMVB, RM, VOB, WMV, Xvid, FLV, DAT, AVI, ASF Audio-Formats: WAV, MP3, AAC, FLAC, M4A, MP2, OGG, WMA **Size:** 58x35x7cm **UPC** 4019588092242 **TECHNIPLAYER LP 200** TECHNIPLAYER LP 200, puck, counterweight, system with needle, cover with **Brand:** TechniSat hinges, turntable bearing (rubber), USB cable, user manual Connections = Audio out analogue Wow and flutter < 0,25 % (Wow & Flutter) Rotational speed 33/45 Motor DC servo motor Type of drive Belt drive (with aluminium platter) **Size:** 435 x 121 x 372 mm UPC 4019588094123 0001/393 **DIGITRADIO 451 CD IR - White** Top features **Brand:** TechniSat DAB+ digital radio FM radio with RDS and PLL Limitless choice of music via Internet radio TFT colour display (2,4") Audio streaming (Spotify, Bluetooth) USB interface with charging function and MP3 playback CD player with MP3 function Integrated Wi-Fi connectivity Clock from Network Remote Control & APP based remote control option UPC 4019588139381 0002/3938 **DIGITRADIO 451 CD IR - Anthrazit** Top features **Brand:** TechniSat DAB+ digital radio FM radio with RDS and PLL Limitless choice of music via Internet radio TFT colour display (2,4") Audio streaming (Spotify, Bluetooth) USB interface with charging function and MP3 playback CD player with MP3 function Integrated Wi-Fi connectivity

Clock from Network

Remote Control & APP based remote control option



TechniSat

UPC 4019588731011

y.4 TechniSat

	y.4 Technisac	
Satellite Reception	Terrestrial Reception IPTV Dishes Amplifiers Receivers	Headends Antennas
0002/3951	DIGITRADIO 631 -Anthrazit	
	Top features	Brand: TechniSat
	DAB+ digital radio Wireless charging/USB charging	
Notified The Control of the Control	FM radio (with RDS and PLL) Limitless music variety via Internet radio	
	Audio streaming (Spotify, UPnP, Bluetooth) Oversized illuminated OLED display	
	Amazon Alexa voice control	
	CD player with MP3 playback USB interface with charging function and mp3 playback	
	Control via the TechniSat CONNECT app (iOS, Android)	
	Size: 400 x 170 x 215 mm	UPC 4019588239517
0010/3933	VIOLA 2 C IR	
,	Top features	Brand: TechniSat
	DAB+ digital radio	
	RDS FM radio	
Technicate (DAS 2 28.67) Descriptions/fund	Station memory (30 FM / 30 DAB / 30 IR)	
1-147	Date and time display TFT colour display (2.4")	
	Exchangeable (LiPo) battery with up to 5 hours' worth of charge	
	Internet radio via wireless LAN	
- Not close	App Control	UPC 4019588109339
70 7040 04	T '. 400 ID	61 C 4019300109339
78-3010-01	Transita 120 IR	
	Top features	Brand: NordMende
	DAB+ digital radio	
	RDS-PLL FM radio	
- To The second	Boundless music diversity via Internet radio Illuminated dot-matrix LC display	
	Integrated bot-matrix EC display Integrated battery for up to 24 hours playback	
	Favorite memory (10 DAB+/10 FM)	
	UPnP audio streaming	
NORDMENDE		

Integrated wi-fi connectivity Adjustable sound equalizer

Metal handle

www.digitalimports.co.nz

Y - Pg 8