



# RF PASSIVE EQUIPMENT




## Model: SPR-Series



SPR-205

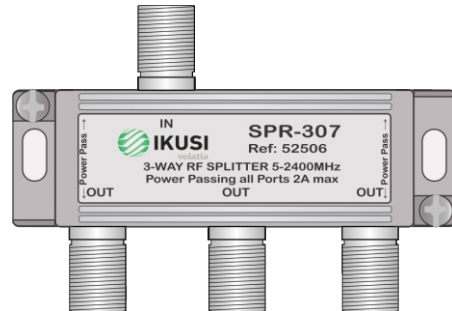

SPR-307

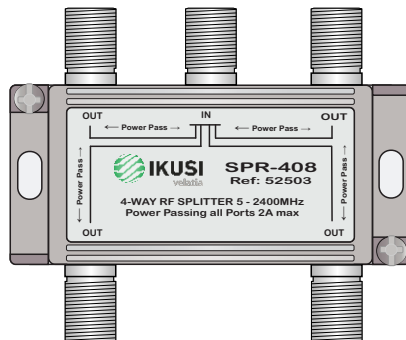

SPR-408

## 5 -2400 MHz Splitters Power Pass All Ports

### Features

- Low cost high performance, proven technology for MATV distribution
- 2, 3, 4, way shielded RF Splitters .
- Frequency range 5-2400MHz.
- Wall Fixing, nickle plated zinc diecast housing (Mounting screws included).
- Grounding Facilities.
- All Ports F female connectors.
- DC Power Passing all ports.
- Max +30Vdc. 2.0A DC passing.
- Foxtel approved

Indoor Splitters 5 - 2400 MHz

# RF PASSIVE EQUIPMENT



## Specifications

**Indoor Splitters 5 - 2400 MHz**

Model		IKU205	IKU307	IKU408	
Reference					
Foxtel Approval Number		F31029	F31030	F31031	
Item	Frequency MHz	dB	Typical Values		
Insertion Loss IN-Out (Through Loss)	5 - 40 MHz	dB	4.2	7.5	8.5
	40 - 1000 MHz		4.8	7.5	9.2
	1000 - 1750 MHz		6.0	8.8	10.0
	1750 - 2050 MHz		6.5	10.5	11.2
	2050 - 2400 MHz		6.5	11.0	12.3
Mutual Isolation Out to Out (Port to Port)	5 - 40 MHz	dB	19	20	22
	40 - 1000 MHz		20	21	21
	1000 - 1750 MHz		20	21	21
	1750 - 2050 MHz		20	21	21
	2050 - 2400 MHz		20	20	20
Return Loss In / Out	5 - 40 MHz	dB	12	8	10
	40 - 1000 MHz		11	11	11
	1000 - 1750 MHz		9	11	11
	1750 - 2050 MHz		10	11	11
	2050 - 2400 MHz		10	11	10
Power Passing		A / Vdc	1A / 30Vdc		
Dimensions		L x W x H mm	53 x 50 x 17	74 x 50 x 17	74 x 60 x 15