


SAT-IF DISTRIBUTION EQUIPMENT

Model: **IKU0132**

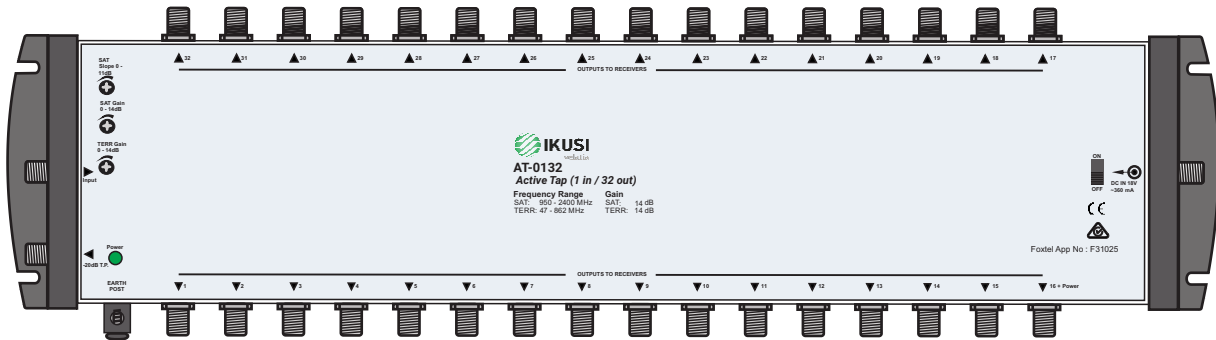

32 Way

32 way Active MS Tap

Features

- Low cost high performance, proven technology for SMATV distribution
- Stand alone Active MS Tap.
- Distribution of 1 satellite - multiple polarizations and 1 terrestrial signal
- Active satellite & terrestrial with continuous gain adjustments.
- Satellite path supplied to all user receivers & Televisions
- DC Pass through option to source - Switchable with LED indicator.
- Sheet metal housing, indoor mounting, wall fixing.
- Foxtel Approved - F31025

SAT-IF DISTRIBUTION EQUIPMENT



Specifications

Model			IKU0116	IKU0132
Reference				
Number of satellite inputs (combined)			1	1
Number of terrestrial input (combined)			1	1
Number of outputs (users)			16	32
SAT frequency Band		MHz	950 - 2400	950 - 2400
TERR frequency Band		MHz	47 - 862	47 - 862
Insertion Gain (Fixed Slope 4dB)	SAT	dB	14	14
	TERR	47 MHzdB	10	10
		862MHzdB	14	14
Gain Adjustment	SAT	dB	14	14
	TERR	dB	14	14
Slope Adjustment		db	11	11
Out of Band Rejection (Sat-Terr)		dB	37	37
Output Isolation	TERR	dB	30	30
	SAT	dB	35	35
Return Loss	TERR	dB	12	12
	SAT	dB	12	12
TERR Max output (60dBuV IMA3 @ EN60728-5)		dBuV	96	96
SAT Max output (35dBuV IMA3 @ EN60728-3)		dBuV	97	96
Power Source 2A Maximum, DC Input & Port 8 (16 Way) and Port 16 (32 Way)		mA	12-18V / 270mA	12-18V / 360mA
Input and Output RF connectors			F-female	F-female
Supply DC connector			F-female	F-female
Dimensions L x W x H		mm	270 x 125 x 54	470 x 125 x 54
Weight		Kg	0.60	1.00

Active MS Tap